



**SERVICE CONTRACT NO: EDO/01/2017**

**ENVIRONMENTAL TEAM FOR  
DEVELOPMENT OF  
ANDERSON ROAD QUARRY SITE -  
ROAD IMPROVEMENT WORKS**

**UNDER ENVIRONMENTAL PERMIT NO. EP-513/2016**

**MONTHLY ENVIRONMENTAL MONITORING & AUDIT REPORT**

**JUNE 2019**

**CLIENTS:**

**Civil Engineering and Development  
Department**

**PREPARED BY:**

**Lam Environmental Services Limited**

11/F Centre Point  
181-185 Gloucester Road,  
Wanchai, H.K.

Telephone: (852) 2882-3939  
Facsimile: (852) 2882-3331  
E-mail: [info@lamenviro.com](mailto:info@lamenviro.com)  
Website: <http://www.lamenviro.com>

**CERTIFIED BY:**

---

Sam Lam  
Environmental Team Leader

**DATE:**

12 July 2019



Civil Engineering and Development Department  
New Territories East Development Office  
Suite 1213 Chinachem Golden Plaza  
77 Mody Road  
Tsim Sha Tsui East  
Kowloon

Your reference:

Our reference: HKCEDD12/50/105881

Date: 12 July 2019

Attention: Mr Leung Siu Kau, Kelvin

**BY POST**

Dear Sirs

Agreement No. EDO/04/2017  
Independent Environmental Checker (IEC) for Development of Anderson Road Quarry Site  
– Road Improvement Works  
Monthly Environmental Monitoring & Audit Report (June 2019)

We refer to the emails on 9 and 10 July 2019 from Environmental Team, Lam Environmental Services Limited attaching a Monthly Environmental Monitoring and Audit Report (June 2019) for the captioned project.

We have no further comment and hereby verify the abovementioned report in accordance with Clause 3.4 of the Environmental Permit no. EP-513/2016.

Should you have any queries, please do not hesitate to contact the undersigned or our Ms Hazel Chan on 2618 2831.

Yours faithfully  
ANEWR CONSULTING LIMITED

Adi Lee  
Independent Environmental Checker

LYMA/CYYH/lhmh

cc AECOM head office – Mr Ivan Tsang (email: [ivan.tsang@aecom.com](mailto:ivan.tsang@aecom.com))  
AECOM – Mr Brad C W Chan (email: [c3-srec4@arqaecom.com](mailto:c3-srec4@arqaecom.com))  
Lam Environmental Services Limited – Mr Sam Lam (email: [kclam@lamenviro.com](mailto:kclam@lamenviro.com))



**TABLE OF CONTENTS**

**1 INTRODUCTION..... 7**

1.1 Scope of the Report ..... 7

1.2 Structure of the Report..... 7

**2 PROJECT BACKGROUND..... 9**

2.1 Background..... 9

2.2 Scope of the Project and Site Description ..... 9

2.3 Project Organization and Contact Personnel ..... 9

2.4 Construction Activities..... 10

**3 STATUS OF REGULATORY COMPLIANCE ..... 12**

3.1 Status of Environmental Licensing and Permitting under the Project . 12

3.2 Status of Submission under the EP-513/2016 ..... 13

**4 MONITORING REQUIREMENTS ..... 14**

4.1 Noise Monitoring ..... 14

4.2 Air Monitoring ..... 16

4.3 Water Quality Monitoring ..... 19

**5. MONITORING RESULTS..... 23**

5.1 Noise Monitoring Results..... 23

5.2 Air Monitoring Results ..... 23

5.3 Water Quality Monitoring Results..... 23

5.4 Waste Management ..... 24

**6. COMPLIANCE AUDIT ..... 26**

6.1 Noise Monitoring ..... 26

6.2 Air Quality Monitoring..... 26

6.3 Water Quality Monitoring ..... 26

6.4 Review of the Reasons for and the Implications of Non-compliance .. 27

6.5 Summary of action taken in the event of and follow-up on non-compliance ..... 27

**7. ENVIRONMENTAL SITE AUDIT ..... 28**

**8. COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTION..... 30**

**9. CONCLUSION ..... 31**

## LIST OF TABLES

<b>Table 2.1</b>	<b>Schedule 2 Designated Projects under this Project</b>
<b>Table 2.2</b>	<b>Contact Details of Key Personnel</b>
<b>Table 3.1</b>	<b>Summary of the current status on licences and/or permits on environmental protection pertinent to the Project</b>
<b>Table 3.2</b>	<b>Summary of submission status under EP-513/2016</b>
<b>Table 4.1</b>	<b>Noise Monitoring Station</b>
<b>Table 4.2</b>	<b>Noise Monitoring Equipment</b>
<b>Table 4.3</b>	<b>Action and Limit Level for Noise Monitoring</b>
<b>Table 4.4</b>	<b>Air Monitoring Station</b>
<b>Table 4.5</b>	<b>Air Quality Monitoring Equipment</b>
<b>Table 4.6</b>	<b>Action and Limit Level for Air Quality Monitoring</b>
<b>Table 4.7</b>	<b>Marine Water Quality Stations for Water Quality Monitoring</b>
<b>Table 4.8</b>	<b>Water Quality Monitoring Equipment</b>
<b>Table 4.9</b>	<b>Action and Limit Level for Water Quality Monitoring</b>
<b>Table 5.1</b>	<b>Summary of Quantities of Inert C&amp;D Materials</b>
<b>Table 5.2</b>	<b>Summary of Quantities of C&amp;D Wastes</b>
<b>Table 7.1</b>	<b>Summary of Environmental Inspections</b>
<b>Table 7.2</b>	<b>Summary of Landscape Inspections</b>
<b>Table 8.1</b>	<b>Cumulative Statistics on Complaints</b>
<b>Table 8.2</b>	<b>Cumulative Statistics on Successful Prosecutions</b>
<b>Table 9.1</b>	<b>Construction Activities and Recommended Mitigation Measures in Coming Reporting 2 Months</b>

## LIST OF FIGURES

<b>Figure 2.1</b>	<b><a href="#">Project Layout</a></b>
<b>Figure 2.2</b>	<b><a href="#">Project Organization Chart</a></b>
<b>Figure 4.1</b>	<b><a href="#">Locations of Noise Monitoring Station (for Road Improvement Work 1 &amp; 2)</a></b>
<b>Figure 4.2</b>	<b><a href="#">Locations of Noise Monitoring Station (for Road Improvement Work 3)</a></b>
<b>Figure 4.3</b>	<b><a href="#">Locations of Air Quality Monitoring Station (for Road Improvement Work 1 &amp; 2)</a></b>
<b>Figure 4.4</b>	<b><a href="#">Locations of Air Quality Monitoring Station (for Road Improvement Work 3)</a></b>
<b>Figure 4.5</b>	<b><a href="#">Locations of Water Quality Monitoring Station (for Road Improvement Work 1 &amp; 2)</a></b>
<b>Figure 4.6</b>	<b><a href="#">Locations of Water Quality Monitoring Station (for Road Improvement Work 3)</a></b>

## LIST OF APPENDICES

<b>Appendix 3.1</b>	<b><a href="#">Environmental Mitigation Implementation Schedule</a></b>
<b>Appendix 4.1</b>	<b><a href="#">Action and Limit Level</a></b>
<b>Appendix 4.2</b>	<b><a href="#">Copies of Calibration Certificates</a></b>
<b>Appendix 4.3</b>	<b><a href="#">Wind data extracted from HKO Automatic Weather Station</a></b>
<b>Appendix 5.1</b>	<b><a href="#">Monitoring Schedule for Reporting Month</a></b>
<b>Appendix 5.2</b>	<b><a href="#">Noise Monitoring Results and Graphical Presentations</a></b>
<b>Appendix 5.3</b>	<b><a href="#">Air Quality Monitoring Results and Graphical Presentations</a></b>
<b>Appendix 5.4</b>	<b><a href="#">Water Quality Monitoring Results and Graphical Presentations</a></b>
<b>Appendix 5.5</b>	<b><a href="#">Monthly Summary Waste Flow Table</a></b>
<b>Appendix 6.1</b>	<b><a href="#">Event and Action Plans</a></b>
<b>Appendix 6.2</b>	<b><a href="#">Summary for Notification of Exceedance</a></b>
<b>Appendix 8.1</b>	<b><a href="#">Complaint Log</a></b>
<b>Appendix 9.1</b>	<b><a href="#">Construction Programme of Individual Contracts</a></b>



## EXECUTIVE SUMMARY

i. This is the Environmental Monitoring and Audit (EM&A) Monthly Report – [June 2019](#) of Development of Anderson Road Quarry Site – Road Improvement Works under Environmental Permit no. EP-513/2016 (Hereafter as “the Project”). The construction works of the Project was commenced on 2 November 2018 and the tentative completion date is end of 2023. This is the [8th](#) EM&A report presenting the environmental monitoring findings and information recorded during the period of [1 June 2019 to 30 June 2019](#). The cut-off date of reporting is at the end of each reporting month.

ii. In the reporting month, the principal work activities conducted are as follow:

### Works in Road Improvement Works 1 (RIW1)

- Piling platform 2 concrete block laying in progress;
- Civil works for gasmain diversion under new Slip Road 2;
- Preparation works for pre-drill work of CT5 are in-progress;

### Works in Road Improvement Works 2 (RIW2)

- Formation works and soil nail works for Slope D3 works in progress;
- Relocation of existing highway lighting along Clear Water Bay Road (Portion C) was completed; Modification of existing central median along Clear Water Bay Road (Portion C) is working in-progress;
- Relocation of District Welcome Signboard in progress;

### Works in Road Improvement Works 3 (RIW3)

- Form haul-road at slope D1 is in-progress;
- Rock excavation, form haul road and tree felling works at slope D3 are in-progress;
- Modification works to junction of Lin Tak Road and Sau Mau Ping Road for construction of temporary safety fence.
- Construction of temporary safety fence along Lin Tak Road.
- Form the temporary access road to facilitate the rock cutting works at Slope D3;
- Form the haul road to implement the ELS works for Retaining Wall RWD2 at Slope D2;
- Construction of ELS works for construction of Retaining Wall RWD2 at Slope D2;

### Air Quality Monitoring

- iii. 1-hour Total Suspended Particulates (TSP) monitoring was conducted at eight monitoring stations. The sampling frequency is 3 times in every 6 days in the reporting month.
- iv. [No action or limit level exceedance was recorded in the reporting period.](#)

### Noise Monitoring



- v. Noise monitoring was conducted at five noise monitoring stations once per week in the reporting month.
- vi. No action or limit level exceedance was recorded in the reporting period.

#### Water Quality Monitoring

- vii. Water quality monitoring was conducted at four monitoring stations three days per week in the reporting month.
- viii. The water quality monitoring for AC1, AC2 and AC3 has been started conducting on 14 June 2019.
- ix. No water can be collected at Station AC1 on 17, 19, 21, 24, 26 and 28 June 2019 as the station was dried out during the monitoring scheduled in the reporting month.
- x. Two (2) suspended solid limit level exceedances were recorded at Station F on 10 and 14 June 2019. Investigation of the exceedances were still in progress and would be reported in the coming report.  
One (1) suspended solid action level exceedance was recorded at Station I on 5 June 2019. Investigation of the exceedances were still in progress and would be reported in the coming report.  
Two (2) turbidity limit level exceedances were recorded at Station F on 10 and 14 June 2019. Investigation of the exceedances were still in progress and would be reported in the coming report.  
One (1) pH limit level exceedance and One (1) action level exceedance were recorded at Station F on 14 June 2019 and 21 June 2019 respectively. Investigation of the exceedance was still in progress and would be reported in the coming report.  
For the exceedances in May, after investigation, the turbidity and suspended solid limit level exceedances on 24 May 2019 were project related. Meanwhile, the exceedances on 20, 22 and 27 May 2019 were not related to project activities.

#### Site Inspections and Audit

- xi. The Environmental Team (ET) conducted weekly site inspections for the Contract on 6, 14, 21 and 28 June 2019. IEC attended the joint site inspection on 14 June 2019. No non-compliance was found during the site inspection while reminders on environmental measures were recommended.

#### Complaints, Notifications of Summons and Successful Prosecutions

- xii. No environmental complaint was received in the reporting period.



Reporting Changes

- xiii. There are no particular reporting changes.

Future Key Issues

- xiv. In coming reporting 2 months, the scheduled construction activities and the recommended mitigation measures are listed as follows:

Key Construction Works	Recommended Mitigation Measures
<ul style="list-style-type: none"> <li>• Piling platform 2 concrete block laying in progress;</li> <li>• Civil works for gasmain diversion under new Slip Road 2;</li> <li>• Preparation works for pre-drill work of CT5 are in-progress;</li> <li>• Formation works and soil nail works for Slope D3 works in progress;</li> <li>• Relocation of existing highway lighting along Clear Water Bay Road (Portion C) was completed; Modification of existing central median along Clear Water Bay Road (Portion C) is working in-progress;</li> <li>• Relocation of District Welcome Signboard in progress;</li> <li>• Form haul-road at slope D1 is in-progress;</li> <li>• Rock excavation, form haul road and tree felling works at slope D3 are in-progress;</li> <li>• Modification works to junction of Lin Tak Road and Sau Mau Ping Road for construction of temporary safety fence.</li> <li>• Construction of temporary safety fence along Lin Tak Road.</li> <li>• Form the temporary access road to</li> </ul>	<ul style="list-style-type: none"> <li>• Dust control during dust generating works;</li> <li>• Implementation of proper noise pollution control; and</li> <li>• Provision of protection to ensure no runoff out of site area or direct discharge into public drainage system.</li> </ul>



Key Construction Works	Recommended Mitigation Measures
<p>facilitate the rock cutting works at Slope D3;</p> <ul style="list-style-type: none"><li>• Form the haul road to implement the ELS works for Retaining Wall RWD2 at Slope D2;</li><li>• Construction of ELS works for construction of Retaining Wall RWD2 at Slope D2.</li></ul>	



## 1 Introduction

### 1.1 Scope of the Report

- 1.1.1. Lam Environmental Services Limited (LES) has been appointed to work as the Environmental Team (ET) under Environmental Permit (EP) no. EP-513/2016 to implement the Environmental Monitoring and Audit (EM&A) programme as stipulated in the EM&A Manual of the approved Environmental Impact Assessment (EIA) Report for Development of Anderson Road Quarry site - Road Improvement Works (Register No.: AEIAR-195/2016).
- 1.1.2. In accordance with Clause 3.4 stated in EP-513/2016, four hard copy and one electronic copy of the monthly EM&A Report shall be submitted to the Director within 2 weeks after the end of each reporting month throughout the entire construction period.
- 1.1.3. In accordance with Section 11.3.1 of the Project EM&A Manual, the first Monthly EM&A Report should be prepared and submitted to EPD within a month after the major construction works commences with the subsequently Monthly EM&A Reports due in 10 works day of the end of each reporting month.

### 1.2 Structure of the Report

**Section 1**     **Introduction** – details the scope and structure of the report.

**Section 2**     **Project Background** – summarizes background and scope of the project, site description, project organization and contact details of key personnel during the reporting period.

**Section 3**     **Status of Regulatory Compliance** – summarizes the status of valid Environmental Permits / Licenses during the reporting period.

**Section 4**     **Monitoring Requirements** – summarizes all monitoring parameters, monitoring methodology and equipment, monitoring locations, monitoring frequency, criteria and respective event and action plan and monitoring programmes.

**Section 5**     **Monitoring Results** – summarizes the monitoring results obtained in the reporting period.

**Section 6**     **Compliance Audit** – summarizes the auditing of monitoring results, all exceedances environmental parameters.



- Section 7**     **Environmental Site Audit** – summarizes the findings of weekly site inspections undertaken within the reporting period, with a review of any relevant follow-up actions within the reporting period.
- Section 8**     ***Complaints, Notification of summons and Prosecution*** – summarizes the cumulative statistics on complaints, notification of summons and prosecution
- Section 9**     ***Conclusion***

## 2 Project Background

### 2.1 Background

- 2.1.1. The Development of Anderson Road Quarry (ARQ) Site is to provide land and the associated infrastructures for the proposed land uses at the existing ARQ site at the north-eastern of East Kowloon.
- 2.1.2. In addition to the site formation and infrastructure works within the ARQ site, a new bus-to-bus interchange (BBI) at the toll plaza of Tseung Kwan O Tunnel and a series of associated off-site road improvement works and pedestrian connectivity facilities are also proposed to mitigate the potential cumulative traffic impact arising from the proposed ARQ development.
- 2.1.3. The Project under Environmental Permit (EP) (EP No. EP-513/2016) is for the three associated of-site road improvement works which comprises: (i) improvement of junction of (J/O) Lin Tak Road / Sau Mau Ping Road (RIW3) (ii) widening and improvement of sections of Clear Water Bay Road and On Sau Road (RIW2); and (iii) widening and improvement of sections of New Clear Water Bay Road and Shun Lee Tsuen Road (RIW1). The location of the Project is shown [Figure 2.1](#).

### 2.2 Scope of the Project and Site Description

- 2.2.1. The project contains various Schedule 2 Designated Projects (DPs) that, under the EIAO, require EPs to be granted by the DEP before they may be either constructed or operated. **Table 2.1** summarises the DPs under this Project.

**Table 2.1 Schedule 2 Designated Projects under this Project**

Item	Designated Project	EIAO Reference
DP2	A road which is an expressway, trunk road, primary distributor road or district distributor road including new roads, and major extensions or improvements to existing road	Schedule 2, Part I, A.1

### 2.3 Project Organization and Contact Personnel

- 2.3.1 Civil Engineering and Development Department is the overall project controllers for the Project. For the construction phase of the Project, Project Engineer, Contractor(s), Environmental Team and Independent Environmental Checker are appointed to manage and control environmental issues.



2.3.2 The proposed project organization and lines of communication with respect to environmental protection works are shown in [Figure 2.2](#). Key personnel and contact particulars are summarized in **Table 2.2**:

**Table 2.2 Contact Details of Key Personnel**

Party	Role	Post	Name	Contact No.	Contact Fax
AECOM	Engineer's Representative	Senior Resident Engineer	Mr. Brad Chan	5506 0068	2473 3221
Chun Wo – China Metallurgical Group Corporation Joint Venture	Contractor	Site Agent	Mr. Chris Lam	9801 9974	3965 9854
		Environmental Officer	Miss King Lam	9570 6187	
ANewR Consulting Limited	Independent Environmental Checker (IEC)	Independent Environmental Checker (IEC)	Mr. Adi Lee	2618 2836	3007 8648
Lam Environmental Services Limited	Environmental Team (ET)	Environmental Team Leader (ETL)	Mr. Sam Lam	6178 3179	2882 3331

## 2.4 Construction Activities

2.4.1 In the reporting month, the principal work activities conducted are as follow.

### Works in Road Improvement Works 1 (RIW1)

- Piling platform 2 concrete block laying in progress;
- Civil works for gasmain diversion under new Slip Road 2;
- Preparation works for pre-drill work of CT5 are in-progress;

### Works in Road Improvement Works 2 (RIW2)

- Formation works and soil nail works for Slope D3 works in progress;
- Relocation of existing highway lighting along Clear Water Bay Road (Portion C) was completed; Modification of existing central median along Clear Water Bay Road (Portion C) is working in-progress;
- Relocation of District Welcome Signboard in progress;

### Works in Road Improvement Works 3 (RIW3)

- Form haul-road at slope D1 is in-progress;
- Rock excavation, form haul road and tree felling works at slope D3 are in-progress;
- Modification works to junction of Lin Tak Road and Sau Mau Ping Road for construction of temporary safety fence.
- Construction of temporary safety fence along Lin Tak Road.



- Form the temporary access road to facilitate the rock cutting works at Slope D3;
- Form the haul road to implement the ELS works for Retaining Wall RWD2 at Slope D2;
- Construction of ELS works for construction of Retaining Wall RWD2 at Slope D2

2.4.2 In coming reporting 2 months, the scheduled construction activities are listed as follows:

- Construction works at Slip Road 2;
- Civil provision for gas-main relocation at Slip Road 2;
- Piling Platform 1 & 2 Construction (RIW1);
- No fine concrete construction at Type 8 area (RIW1);
- ELS for Type 1 & 1a construction (RIW1); and
- Site clearance at Substation (RIW1);
- Pull-out test for soil nail construction;
- Soil nail construction commencement;
- Removal of existing central median on Clear Water Bay Road;
- Relocation of for Welcome sign board; and
- Soil excavation to form slope profile for soil nail construction;
- Construct site access at Slope D1, D2 and D3;
- Haul construction for Slope D1 and D3
- Stage 1 rock excavation of Slope D3;
- Pre-drill works of Slope D1

### 3 Status of Regulatory Compliance

#### 3.1 Status of Environmental Licensing and Permitting under the Project

3.1.1. A summary of the current status on licences and/or permits on environmental protection pertinent to the Project is shown in **Table 3.1**.

**Table 3.1 Summary of the current status on licences and/or permits on environmental protection pertinent to the Project**

Permits and/or Licences	Permit. No. / Account No.	Valid From	Expiry Date	Status
Notification pursuant to Air Pollution Control (Construction Dust) Regulation	Form NA submitted to EPD on 29 May 2018.			
Environmental Permit	EP-513/2016	20 Jul 2016	N/A	Valid
Construction Noise Permit (CNP)				
Nil	Nil	Nil	Nil	Nil
Billing Account for Disposal				
Billing Account for Disposal of Construction Waste	7031075	20 Jul 2018	End of the Project	Valid
Chemical Waste Registration				
Registration as a Waste Producer for Sau Mau Ping Road to Lin Tak Road	5213-294-C4239-04	6 Aug 2018	N/A	Valid
Registration as a Waste Producer for Sau Mau Ping Area between Him Tat House and Sau Mau Ping Salt Water Service Reservoir	5213-293-C4239-05	6 Aug 2018	N/A	Valid
Registration as a Waste Producer for New Clear Water Bay Road (Start from 46 Clear Water Bay Road, End at Shun Lee Tsuen Road and San Lee Street	5213-291-C4239-02	13 Aug 2018	N/A	Valid
Registration as a Waste Producer for South Part of Hiu Ming Street Playground	5213-294-C4239-03	6 Aug 2018	N/A	Valid
Registration as a Waste Producer for Clear Water Bay Road and New Clear Water Bay Road (From the intersection of Fei Ngo Shan Road to Tai Pan Court) and on Sau Road (From the intersection of New Clear Water Bay Road to 9 Anderson Road	5213-831-C4239-08	6 Aug 2018	N/A	Valid
Registration as a Waste Producer for Sau Mau Ping Area Between Anderson Road and On Sau Road, next to Oi Tat House	5213-292-C4239-06	6 Aug 2018	N/A	Valid
Water Discharge Licence				

Permits and/or Licences	Permit. No. / Account No.	Valid From	Expiry Date	Status
Water Pollution Ordinance Licence for Lin Tak Road to Sau Mau Ping Road including Tseung Kwan O Tunnel Toll Plaza	WT00032742-2018	18 Jan 2019	31 Jan 2024	Valid
Water Pollution Ordinance Licence for Sau Mau Ping Area between Anderson Road and On Sau Road, next to Oi Tat House	WT00033223-2019	31 Jan 2019	31 Jan 2024	Valid
Water Pollution Ordinance Licence for Sau Mau Ping Area at south part of Hiu Ming Street playground	WT00033224-2019	21 Mar 2019	31 Mar 2024	Valid
Water Pollution Ordinance Licence for intersection of Fei Ngo Shan Road to Tai Pan Court and on Sau Road (From the intersection of New Clear Water Bay Road to 9 Anderson Road	WT00033299-2019	5 Mar 2019	31 Mar 2024	Valid

### 3.2 Status of Submission under the EP-513/2016

3.2.1. A summary of the current status on submission under EP-513/2016 is shown in **Table 3.2**.

**Table 3.2 Summary of submission status under EP-513/2016**

EP Condition	Submission	Date of Submission
Condition 1.12	Notification of Commencement Date of Works	24 September 2018
Condition 2.10	Management Organization of Main Construction Companies	27 September 2018
Condition 2.11	Submission of Design Drawing(s) of the Project	28 September 2018
Condition 2.12	Submission of Landscape and Visual Mitigation Plan(s)	28 September 2018
Condition 2.14 (a) and 2.15	Submission of Detailed Vegetation Survey Report (2nd submission)	7 December 2018
Condition 2.14 (b) and 2.15	Submission of Transplantation Proposal	7 December 2018
Condition 3.3	Submission of Baseline Environmental Monitoring Report (2nd submission)	18 December 2018
Condition 2.14 (c)	Transplantation Completion Report	3 May 2019
Condition 3.4	Monthly EM&A Report (May)	17 June 2019

## 4 Monitoring Requirements

### 4.1 Noise Monitoring

#### NOISE MONITORING STATIONS

4.1.1. The noise monitoring stations for the Project are listed and shown in **Table 4.1** and [Figure 4.1](#) & [4.2](#).

**Table 4.1 Noise Monitoring Station**

Monitoring Station ID	Monitoring Location	Measurement Type	Level (in terms of no. of floor)
NMC01	Kei Shun Special School	Façade	G/F
NMC02	Shun Lee Disciplined Services Quarters Block 6	Façade	3/F podium
NMC03	Sienna Garden Block 6	Free-field	G/F
NMC04	Po Tat Estate Tat Kai House	Free-field	3/F podium
NMC05	Hong Wah Court Block B Yee Hong House	Façade	G/F

#### NOISE MONITORING PARAMETERS, FREQUENCY AND DURATION

4.1.2. Noise monitoring shall be carried out at all the designated monitoring stations. The monitoring frequency shall depend on the scale of the construction activities. The following is an initial guide on the regular monitoring frequency for each station on a weekly basis when noise generating activities are underway:

- One set of measurements between 0700-1900 hours on normal weekdays (six consecutive Leq/5min readings);
- One set of measurements between 1900-2300 hours;
- One set of measurements between 2300-0700 hours of next day; and
- One set of measurements between 0700-2300 hours on holidays (three consecutive Leq/5min readings).

4.1.3. For the latter 3 sets of measurements specified in Section 4.1.2 above, one set of measurements shall at least include 3 consecutive Leq (5min) results.

4.1.4. Supplementary information for data auditing, statistical results such as L10 and L90 shall also be obtained for reference.

4.1.5. If a school exists near the construction activity, noise monitoring shall be carried out at the monitoring stations for the schools during the examination periods. The ET leader shall liaise with the school's personnel and the examination authority to ascertain the exact dates and times of all examination periods during the course of the contract.

MONITORING EQUIPMENT

4.1.6. Noise monitoring was performed using sound level meter at the designated monitoring locations. The sound level meters shall comply with the International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1) specifications. Acoustic calibrator shall be deployed to check the sound level meters at a known sound pressure level. Brand and model of the equipment is given in **Table 4.2**.

**Table 4.2 Noise Monitoring Equipment**

Equipment	Brand and Model	Series Number
Integrated Sound Level Meter	NTi XL2	A2A-15269-E0
	Larson Davis LxT	0005098
Acoustic Calibrator	Larson Davis CAL200	13098 13437

4.1.7. The calibration certificates of the noise monitoring equipment are attached in [Appendix 4.2](#).

SAMPLING PROCEDURE AND MONITORING EQUIPMENT

4.1.8. Monitoring Procedure

- (a) The monitoring station shall normally be at a point 1m from the exterior of the sensitive receiver’s building façade and be at a position 1.2m above the ground.
- (b) Façade measurements were made at the monitoring locations. For free-field measurement, a correction factor of +3 dB (A) would be applied.
- (c) The battery condition was checked to ensure the correct functioning of the meter.
- (d) Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
- (e) Frequency weighting: A, Time weighting: Fast, Measurement time set: continuous 5 mins
- (f) Prior and after to the noise measurement, the meter was checked using the acoustic calibrator for 94dB (A) at 1000 Hz. If the difference in the calibration level before and after measurement was more than ±1 dB (A), the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- (g) Noise measurements shall not be made in fog, rain, wind with a steady speed exceeding 5m/s or wind with gusts exceeding 10m/s. The wind speed shall be checked with a portable wind speed meter capable of measuring the wind speed in m/s.

4.1.9. Maintenance and Calibration

- (a) The microphone head of the sound level meter was cleaned with soft cloth at regular intervals.
- (b) The sound level meter and calibrator were calibrated at yearly intervals.

EVENT AND ACTION PLAN

4.1.10. Noise Standards for Daytime Construction Activities are specified under EIAO-TM. The Action and Limit levels for construction noise are defined in **Table 4.3** and [Appendix 4.1](#). Should non-compliance of the criteria occurs, action in accordance with the Event and Action Plan in [Appendix 6.1](#) shall be carried out.

**Table 4.3 Action and Limit Level for Noise Monitoring**

Monitoring Station	Action Level	Limit Level (dB(A))		
		0700-1900 hrs on normal weekdays	0700-2300 hrs on holidays (including Sundays); and 1900-2300 hrs on all days <sup>2</sup>	2300-0700 hrs of all days <sup>2</sup>
NMC01	When one documented complaint is received	65 / 70 <sup>1</sup>	60 / 65 / 70 <sup>3</sup>	45 / 50 / 55 <sup>3</sup>
NMC02		75		
NMC03		75		
NMC04		75		
NMC05		75		

Remark 1: Limit level of NMC01 - Kei Shun Special School reduce to 65 dB (A) during examination periods if any.

Remark 2: Construction noise during restricted hours is under the control of Noise Control Ordinance Limit Level to be selected based on Area Sensitivity Rating.

Remark 3: Limit Level for restricted hour monitoring shall act as reference level only. Investigation would be conducted on CNP compliance if exceedance recorded during restricted hour noise monitoring period.

**4.2 Air Monitoring**

AIR QUALITY MONITORING STATIONS

4.2.1. The air monitoring stations for the Project are listed and shown in **Table 4.4** and [Figure 4.3 & 4.4](#).



**Table 4.4 Air Monitoring Station**

Monitoring Station ID	Monitoring Location	Level (in terms of no. of floor)
NCWBR_AMS-1	Shun Lee Fire Station	2/F Roof
NCWBR_AMS-2	Shun Lee Estate Lee Hang House	G/F
NCWBR_AMS-3	Shun Lee Disciplined Services Quarters (Block 6)	4/F podium
NCWBR_AMS-4	Sienna Garden	G/F
NCWBR_AMS-5	Shun Chi Court Shun Fung House	Roof
LTR_AMS-1	St Edward's Catholic Primary School	G/F
LTR_AMS-2	Environmental Protection Department's Restored Landfill Site Office	G/F
LTR_AMS-3	Po Tat Estate Tat Kai House	3/F podium

AIR MONITORING PARAMETERS, FREQUENCY AND DURATION

- 4.2.2. One-hour TSP levels should be measured to indicate the impacts of construction dust on air quality.
- 4.2.3. The sampling frequency of at least three times in every six-days should be undertaken when the highest dust impact occurs.

SAMPLING PROCEDURE AND MONITORING EQUIPMENT

4.2.4. Monitoring Procedures

- (a) Check the calibration period of portable direct reading dust meter prior to monitoring (The direct reading dust meter was calibrated at 2-years interval and checked with High Volume Sampler (HVS) yearly.)
- (b) Record the site condition near / around the monitoring stations.
- (c) Install the portable direct reading dust meter to the monitoring location.
- (d) Slide the power switch to turn the power on.
- (e) Check of portable direct reading dust meter to ensure the equipment operation in normal condition.
- (f) Select the period of measurement to 60mins.
- (g) Check and set the correct time.
- (h) Select the appropriate unit display for the equipment.
- (i) Slide the power switch to turn the power off when the monitoring period ended (3 times 1 hour TSP monitoring per day).
- (j) Uninstall the portable direct reading dust meter

- (k) Collected the sampled data for analysis.
- (l) Remark: Procedures (c) to (h) may be different subject to the brands and models of portable direct reading dust meter

4.2.5. Maintenance and Calibration

- (a) The direct reading dust meter was calibrated at 2-years interval and checked with High Volume Sampler (HVS) yearly to determine the accuracy and validity of the results measured.
- (b) Checking of direct reading dust meter will be carried out in order to determine the conversion factor between the direct reading dust meter and the standard equipment, HVS. The comparison check is to be considered valid based on correlation coefficient checked by HOKLAS laboratory.

4.2.6. The 1-hour TSP air quality monitoring was performed by using portable direct reading dust meters at each designated monitoring station. The brand and model of the equipment are given in **Table 4.5**.

**Table 4.5 Air Quality Monitoring Equipment**

Equipment	Brand and model	Series Number
Portable direct reading dust meter	Met One BT- 645	X19299 X19297 X19295 R22586 R22584
	Met One AEROCET 831	W15448 W15449 W16848 R14332

4.2.7. The calibration certificates of the air quality monitoring equipment are attached in [Appendix 4.2](#).

WIND DATA

4.2.8. The representative wind data from Tate’s Cairn HKO Automatic Weather Station and Tseung Kwan O HKO Automatic Weather Station were obtained covering the 1-hr TSP monitoring periods. The wind data were extracted and shown in [Appendix 4.3](#).

EVENT AND ACTION PLAN

4.2.9. The Action and Limit levels for construction air quality are defined in **Table 4.6** and [Appendix 4.1](#). Should non-compliance of the air quality criteria occur, action in accordance with the Event and Action Plan in [Appendix 6.1](#) shall be carried out.

**Table 4.6 Action and Limit Level for Air Quality Monitoring**

Monitoring Locations	1-hour TSP Level in µg/m3	
	Action Level	Limit Level
NCWBR_AMS-1	284.4	500.0
NCWBR_AMS-2	282.4	500.0
NCWBR_AMS-3	287.9	500.0
NCWBR_AMS-4	281.6	500.0
NCWBR_AMS-5	270.0	500.0
LTR_AMS-1	272.1	500.0
LTR_AMS-2	281.1	500.0
LTR_AMS-3	285.1	500.0

### 4.3 Water Quality Monitoring

#### WATER QUALITY MONITORING STATIONS

4.3.1. Water quality monitoring was undertaken at 4 monitoring stations in the reporting month. The proposed water quality monitoring stations of the Project are shown in **Table 4.7** and [Figure 4.5 & 4.6](#).

**Table 4.7 Marine Water Quality Stations for Water Quality Monitoring**

Inland Water	Stations	Description	Easting	Northing
Channelized nullah across the Project site	E	Upstream Control Station	841329	821753
	F	Downstream Impact Station	841469	821635
Ma Yau Tong Stream	H	Upstream Control Station	843008	819880
	I	Downstream Impact Station	842652	819573

#### WATER QUALITY PARAMETERS, FREQUENCY AND DURATION

4.3.2. The levels of dissolved oxygen (DO), turbidity and pH shall be measured in situ while suspended solids (SS) is determined by laboratory analysis at all the designated monitoring stations.

4.3.3. In association with the water quality parameters, other relevant data shall also be recorded, such as monitoring location / position, time, water temperature, salinity, DO saturation, weather conditions, and any special phenomena underway near the monitoring station.



- 4.3.4. The sampling frequency of at least three days per week should be undertaken when the highest dust impact occurs. Upon completion of the construction works, the monitoring exercise at the designated monitoring locations should be continued for four weeks in the same manner as the impact monitoring.
- 4.3.5. The interval between two sets of monitoring should not be less than 36 hours except where there are exceedances of Action and/or Limit Levels, in which case the monitoring frequency will be increased.
- 4.3.6. Replicate in-situ measurements should be carried out in each sampling event.

#### SAMPLING PROCEDURES AND MONITORING EQUIPMENT

##### Dissolved Oxygen And Temperature Measuring Equipment

- 4.3.7. The instrument should be a portable, weatherproof dissolved oxygen measuring instrument complete with cable, sensor, comprehensive operation manuals, and use a DC power source. It should be capable of measuring:
- a dissolved oxygen level in the range of 0-20 mg/l and 0-200% saturation
  - a temperature of 0-45 degree Celsius
- 4.3.8. It should have a membrane electrode with automatic temperature compensation complete with a cable. Sufficient stocks of spare electrodes and cables should be available for replacement where necessary. (e.g. YSI model 59 meter, YSI 5739 probe, YSI 5795A submersible stirrer with reel and cable or an approved similar instrument).
- 4.3.9. Should salinity compensation not be build-in in the DO equipment, in-situ salinity shall be measured to calibrate the DO equipment prior to each DO measurement.

##### Turbidity Measurement Instrument

- 4.3.10. The instrument should be a portable, weatherproof turbidity-measuring instrument complete with comprehensive operation manual. The equipment should use a DC power source. It should have a photoelectric sensor capable of measuring turbidity between 0-1000 NTU and be complete with a cable (e.g. Hach model 2100P or an approved similar instrument).

##### Sampler

- 4.3.11. Due to low water level as mentioned in Section 6.4.3 of the EIA report, bucket sampler (Approximate 1L) will be use instead of water sampler in order to obtain surface water sample without disturb the stream sediment and collect representative results.

##### Salinity

- 4.3.12. A portable salinometer capable of measuring salinity in the range of 0-70 ppt shall be provided for measuring salinity of the water at each of monitoring location.

MONITORING METHODOLOGY

4.3.13. Monitoring Procedure

- (a) The condition near the monitoring stations shall be observed and recorded on the data log sheet.
- (b) Check of sensors and electrodes with certified standard solutions before each use.
- (c) Wet bulb calibration for a DO meter should be carried out before measurement.
- (d) Sample would be taken using bucket sampler at surface level.
- (e) Transfer the sampled water carefully into cleaned water bottles (2x 1000ml) provided by the laboratory at the spot after the collection of the water sample for the subsequent laboratory Suspended Solid testing.
- (f) Transfer the sampled water from the bucket sampler to the rinsed water container for in-situ measurement (In case of the in-situ measurement cannot be carried at spot due to safety and adverse weather condition, sampled water from the bucket sampler will be transfer to cleaned water bottles provided by laboratory. Then, In-situ measurement will be conducted at a safe location which sampled water inside cleaned water bottle will be transfer to the rinsed water container for in-situ measurement) In-situ measurement shall be measured in duplicate.
- (g) Parameters including Water Temperature (°C), pH (units), Salinity (ppt), DO (mg/L), DO saturation (%) will be measured by the Multifunctional Meter and Turbidity (NTU) will be measured by turbid meter. (Water Temperature and Salinity will be measured as reference parameters)
- (h) Record the result on the data log sheet and record any special finding during / after in-situ measurement.
- (i) The water sample bottles will be stored in a cool box (at cooled to 4°C without being frozen), which shall be delivered to HOKLAS laboratory (ALS Technichem (HK) Pty Ltd) for further testing to determine the level of SS.

4.3.14. Maintenance and Calibration

- (a) The responses of sensors and electrodes of the water quality monitoring equipment were cleaned and checked at regular intervals.
- (b) DO meter (Multifunctional Meter) and turbid meter was certified by a laboratory accredited under HOKLAS or any other international accreditation scheme, and subsequently re-calibrated at three monthly intervals.

4.3.15. Brand and model of the equipment are given in **Table 4.8**.

**Table 4.8 Water Quality Monitoring Equipment**

Equipment	Brand and model	Series Number
Multifunctional Meter	YSI Professional Plus	14M100277 17F100236

Turbid meter	Xin Rui WGZ-3B	1807077 1807079
--------------	----------------	--------------------

4.3.16. The calibration certificates of the water quality monitoring equipment are attached in [Appendix 4.2](#).

LABORATORY MEASUREMENT / ANALYSIS

4.3.17. Analysis of suspended solids has been carried out in a HOKLAS accredited laboratory, which is ALS Technichem (HK) Pty Ltd.

EVENT AND ACTION PLAN

4.3.18. The Action and Limit levels for construction water quality are defined in **Table 4.9** and [Appendix 4.1](#). Should the monitoring results of the water quality parameters at any designated monitoring station exceed the water quality criteria, action in accordance with the Event and Action Plan in [Appendix 6.1](#) shall be carried out.

**Table 4.9 Action and Limit Level for Water Quality Monitoring**

Monitoring Station	Surface pH		Surface DO (mg/L)		Surface Turbidity (NTU)		Surface SS (mg/L)	
	Action Level	Limit Level	Action Level	Limit Level	Action Level	Limit Level	Action Level	Limit Level
E	-	-	-	-	-	-	-	-
F	Beyond the range of 6.6-8.4	Beyond the range of 6.5-8.5	5.8	5.5	24.4	32.7	17.0	23.8
H	-	-	-	-	-	-	-	-
I	Beyond the range of 6.6-8.4	Beyond the range of 6.5-8.5	5.5	5.4	206.9	214.2	172.8	201.4

\*Remarks:

The value of 1.0mg/L was taken as the value for measurement with suspended solid level of <1.0mg/L for Action and Limit level calculation.

It is recommended that upstream monitoring station (monitoring station E and H) would be taken as control reference for exceedance investigation only. Action and limit level would not be establish using the baseline data.

## 5. Monitoring Results

- 5.0.1 The environmental monitoring will be implemented based on the division of works areas of each designed projects. Overall layout showing work areas and monitoring stations is shown in [Figure 2.1](#) and Figure 4.1 – 4.6 respectively.
- 5.0.2 The environment monitoring schedules for reporting month and coming month are presented in [Appendix 5.1](#).

### 5.1 Noise Monitoring Results

- 5.1.1 All noise monitoring was conducted as scheduled in the reporting month.
- 5.1.2 No action or limit level exceedance was recorded in the reporting month.
- 5.1.3 There was no examination period for NMC01 during the reporting period.
- 5.1.4 Noise monitoring results measured in this reporting period are reviewed and summarized. Details of noise monitoring results and graphical presentation can be referred in [Appendix 5.2](#).

### 5.2 Air Monitoring Results

- 5.2.1 All 1-hour TSP monitoring was conducted as scheduled in the reporting month.
- 5.2.2 No action or limit level exceedance was recorded in the reporting period.
- 5.2.3 Air quality monitoring results measured in this reporting period are reviewed and summarized. Details of air monitoring results and graphical presentation can be referred in [Appendix 5.3](#).

### 5.3 Water Quality Monitoring Results

- 5.3.1 All water quality monitoring was conducted as scheduled in the reporting month.
- 5.3.2 The water quality monitoring for AC1, AC2 and AC3 has been started conducting on 14 June 2019.
- 5.3.3 No water can be collected at Station AC1 on 17, 19, 21, 24, 26 and 28 June 2019 as the station was dried out during the monitoring scheduled in the reporting month.
- Two (2) suspend solid limit level exceedances were recorded at Station F on 10 and 14 June 2019. Investigation of the exceedances were still in progress and would be reported in the coming report.





One (1) suspend solid action level exceedance was recorded at Station I on 5 June 2019. Investigation of the exceedances were still in progress and would be reported in the coming report.

Two (2) turbidity limit level exceedances were recorded at Station F on 10 and 14 June 2019. Investigation of the exceedances were still in progress and would be reported in the coming report.

One (1) pH limit level exceedance and One (1) action level exceedance were recorded at Station F on 14 June 2019 and 21 June 2019 respectively. Investigation of the exceedance was still in progress and would be reported in the coming report.

For the exceedances in May, after investigation, the turbidity and suspended solid limit level exceedances on 24 May 2019 were project related. Meanwhile, the exceedances on 20, 22 and 27 May 2019 were not related to project activities.

5.3.4 Water quality monitoring results measured in this reporting period are reviewed and summarized. Details of water quality monitoring results and graphical presentation can be referred in [Appendix 5.4](#).

#### 5.4 Waste Management

5.4.1 The quantities of waste for disposal in the Reporting Period are summarized in **Table 5.1** and **Table 5.2**. The Monthly Summary Waste Flow Table is shown in [Appendix 5.5](#). Whenever possible, materials were reused on-site as far as practicable.

**Table 5.1 Summary of Quantities of Inert C&D Materials**

Waste Type	Quantity (this month)	Quantity (Project commencement to the end of last month)	Cumulative Quantity-to-Date	Disposal Location
Hard Rock and Large Broken Concrete (Inert) (in '000m3)	0	0	0	Nil
Reused in this Contract (Inert) (in '000m3)	0	0	0	Nil
Reused in other Projects (Inert) (in '000m3)	0.488	0.563	1.051	Nil
Disposal as Public Fill (Inert)	0.695	4.538	5.233	TKO137



Waste Type	Quantity (this month)	Quantity (Project commencement to the end of last month)	Cumulative Quantity-to-Date	Disposal Location
(in '000m3)				

**Table 5.2 Summary of Quantities of C&D Wastes**

Waste Type	Quantity (this month)	Quantity (Project commencement to the end of last month)	Cumulative Quantity-to-Date	Disposal Location
Metals (in '000kg)	0	0.029	0.029	Nil (waste recycle was arranged)
Paper / Cardboard Packing (in '000kg)	0	0.604	0.604	Nil (waste recycle was arranged)
Plastics (in '000kg)	0	0.040	0.040	Nil (waste recycle was arranged)
Chemical Wastes (in '000kg)	0	0	0	Nil
General Refuses (in '000m3)	0.018	0.026	0.044	SENT

## 6. Compliance Audit

6.0.1. The Event Action Plan for construction noise, air quality and water quality are presented in [Appendix 6.1.](#)

6.0.2. The summary of exceedance is presented in [Appendix 6.2.](#)

### 6.1 Noise Monitoring

6.1.1 [No action or limit level exceedance was recorded in the reporting period.](#)

### 6.2 Air Quality Monitoring

6.2.1 [No action or limit level exceedance was recorded in the reporting period.](#)

### 6.3 Water Quality Monitoring

6.3.1 [The water quality monitoring for AC1, AC2 and AC3 has been started conducting on 14 June 2019.](#)

6.3.2 [No water can be collected at Station AC1 on 17, 19, 21, 24, 26 and 28 June 2019 as the station was dried out during the monitoring scheduled in the reporting month.](#)

6.3.3 [Two \(2\) suspend solid limit level exceedances were recorded at Station F on 10 and 14 June 2019. Investigation of the exceedances were still in progress and would be reported in the coming report.](#)

[One \(1\) suspend solid action level exceedance was recorded at Station I on 5 June 2019. Investigation of the exceedances were still in progress and would be reported in the coming report.](#)

[Two \(2\) turbidity limit level exceedances were recorded at Station F on 10 and 14 June 2019. Investigation of the exceedances were still in progress and would be reported in the coming report.](#)

[One \(1\) pH limit level exceedance and One \(1\) action level exceedance were recorded at Station F on 14 June 2019 and 21 June 2019 respectively. Investigation of the exceedance was still in progress and would be reported in the coming report.](#)

[For the exceedances in May, after investigation, the turbidity and suspended solid limit level exceedances on 24 May 2019 were project related. Meanwhile, the exceedances on 20, 22 and 27 May 2019 were not related to project activities.](#)



**6.4 Review of the Reasons for and the Implications of Non-compliance**

6.4.1 No environmental non-compliance was recorded in the reporting month.

**6.5 Summary of action taken in the event of and follow-up on non-compliance**

6.5.1 There was no particular action taken since no non-compliance was recorded in the reporting period.

**7. Environmental Site Audit**

- 7.0.1. Within this reporting month, weekly environmental site audits were conducted on **6, 14, 21 and 28 June 2019**. IEC attended the joint site inspection on **14 June 2019**.
- 7.0.2. No non-compliance was found during the site inspection while reminders on environmental measures were recommended. **Results and findings of these inspections in this reporting month are listed below in Table 7.1.**

**Table 7.1 Summary of Environmental Inspections**

Date	Item	Reminder(s)/ Observation(s)	Action taken by Contractor	Outcome
6-6-2019	20190606_01	The height of the noise barrier was obviously not enough to cover the work zone. The contractor was required to provide enough and proper mitigation measures to maintain the function of noise barrier and noise reduction at RIW3 (Lin Tak Road)	Due to the onsite situation was not possible to raise the noise barrier for safety reason. The head of the driller was wrapped with noise reduction material and the cover of the engine by noise barrier was ensured.	Completion as observed on 21 June 2019.
6-6-2019	20190606_02	Water spraying is needed for the drilling works at RIW3 for dust suppression.	Water was sprayed during drilling works.	Completion as observed on 21 June 2019.
21-6-2019	20190621_01	The U-channel at RIW1 need to be cleared in order to maintain the function of drainage.	The materials in U-channel were cleared.	Completion as observed on 28 June 2019.
21-6-2019	20190621_02	The gullies at RIW1 need to be well protected to avoid materials other than storm water entering the gullies.	The gullies were covered.	Completion as observed on 28 June 2019.

- 7.0.3. Within this reporting month, biweekly landscape site audits were conducted on **5 and 19 June 2019**.
- 7.0.4. No non-compliance was found during the landscape site inspection. **Results and findings of these inspections in this reporting month are listed below in Table 7.2.**



**Table 7.1 Summary of Landscape site inspections**

<b>Date</b>	<b>Item</b>	<b>Reminder(s)/ Observation(s)</b>	<b>Action taken by Contractor</b>	<b>Outcome</b>
5-6-2019	20190605_01	Storage of equipment/ materials should not be stored within Tree Protection Zone. should be removed from the site.	The materials were still observed.	On-going

**8. Complaints, Notification of Summons and Prosecution**

8.0.1. No environmental complaint was received in the reporting period.

8.0.2. The details of cumulative complaint log and updated summary of complaints are presented in [Appendix 8.1](#).

8.0.3. Cumulative statistic on complaints and successful prosecutions are summarized in **Table 8.1** and **Table 8.2** respectively.

**Table 8.1 Cumulative Statistics on Complaints**

Reporting Period	No. of Complaints
June 2019	0
Project commencement to the end of last reporting month	0
<b>Total</b>	<b>0</b>

**Table 8.2 Cumulative Statistics on Successful Prosecutions**

Environmental Parameters	Cumulative No. Brought Forward	No. of Successful Prosecutions this month (Offence Date)	Cumulative No. Project-to-Date
Air	-	0	0
Noise	-	0	0
Water	-	0	0
Waste	-	0	0
<b>Total</b>	<b>-</b>	<b>0</b>	<b>0</b>



**9. Conclusion**

- 9.0.1. The EM&A programme was carried out in accordance with the EM&A Manual requirements, minor alterations to the programme proposed were made in response to changing circumstances.
- 9.0.2. The performance of the environmental management system of the previous three months (quarter) was generally satisfied. Mitigation measures according to the environmental mitigation implementation schedule and the EIA were generally implemented by the Contractor. Hence, the EM&A programme was considered effective and shall be maintained. The status of the water quality station shall be kept in view, as station E usually was dried out.
- 9.0.3. The scheduled construction activities and the recommended mitigation measures for the coming 2 months are listed in **Table 9.1**. The construction programmes of the Project are provided in [Appendix 9.1](#).

**Table 9.1 Construction Activities and Recommended Mitigation Measures in Coming Reporting 2 Months**

Key Construction Works	Recommended Mitigation Measures
<ul style="list-style-type: none"> <li>• Piling platform 2 concrete block laying in progress;</li> <li>• Civil works for gasmain diversion under new Slip Road 2;</li> <li>• Preparation works for pre-drill work of CT5 are in-progress;</li> <li>• Formation works and soil nail works for Slope D3 works in progress;</li> <li>• Relocation of existing highway lighting along Clear Water Bay Road (Portion C) was completed; Modification of existing central median along Clear Water Bay Road (Portion C) is working in-progress;</li> <li>• Relocation of District Welcome Signboard in progress;</li> <li>• Form haul-road at slope D1 is in-progress;</li> <li>• Rock excavation, form haul road and tree felling works at slope D3 are in-progress;</li> </ul>	<ul style="list-style-type: none"> <li>• Dust control during dust generating works;</li> <li>• Implementation of proper noise pollution control; and</li> <li>• Provision of protection to ensure no runoff out of site area or direct discharge into public drainage system.</li> </ul>




Key Construction Works	Recommended Mitigation Measures
<ul style="list-style-type: none"><li>• Modification works to junction of Lin Tak Road and Sau Mau Ping Road for construction of temporary safety fence.</li><li>• Construction of temporary safety fence along Lin Tak Road.</li><li>• Form the temporary access road to facilitate the rock cutting works at Slope D3;</li><li>• Form the haul road to implement the ELS works for Retaining Wall RWD2 at Slope D2;</li><li>• Construction of ELS works for construction of Retaining Wall RWD2 at Slope D2;</li><li>• Footing construction works at lower portion are in-progress;</li><li>• Preparation works, and temporary staircase construction at upper portion are in-progress;</li><li>• Socketed-H piles construction at PC-E11 are in-progress;</li><li>• Pedestrian Connectivity Facilities Systems A (PC-SYA)</li><li>• Rock excavation for 2nd level and associated rock mapping in-progress;</li><li>• Socketed-H piles construction at PC-SYB are in-progress;</li><li>• Form haul road at upper portion is in-progress;</li><li>• Construction of R.C. works of public toilet;</li><li>• Shop-drawing for E&amp;M works under preparation</li></ul>	



***Figure 2.1***

***Project Layout***

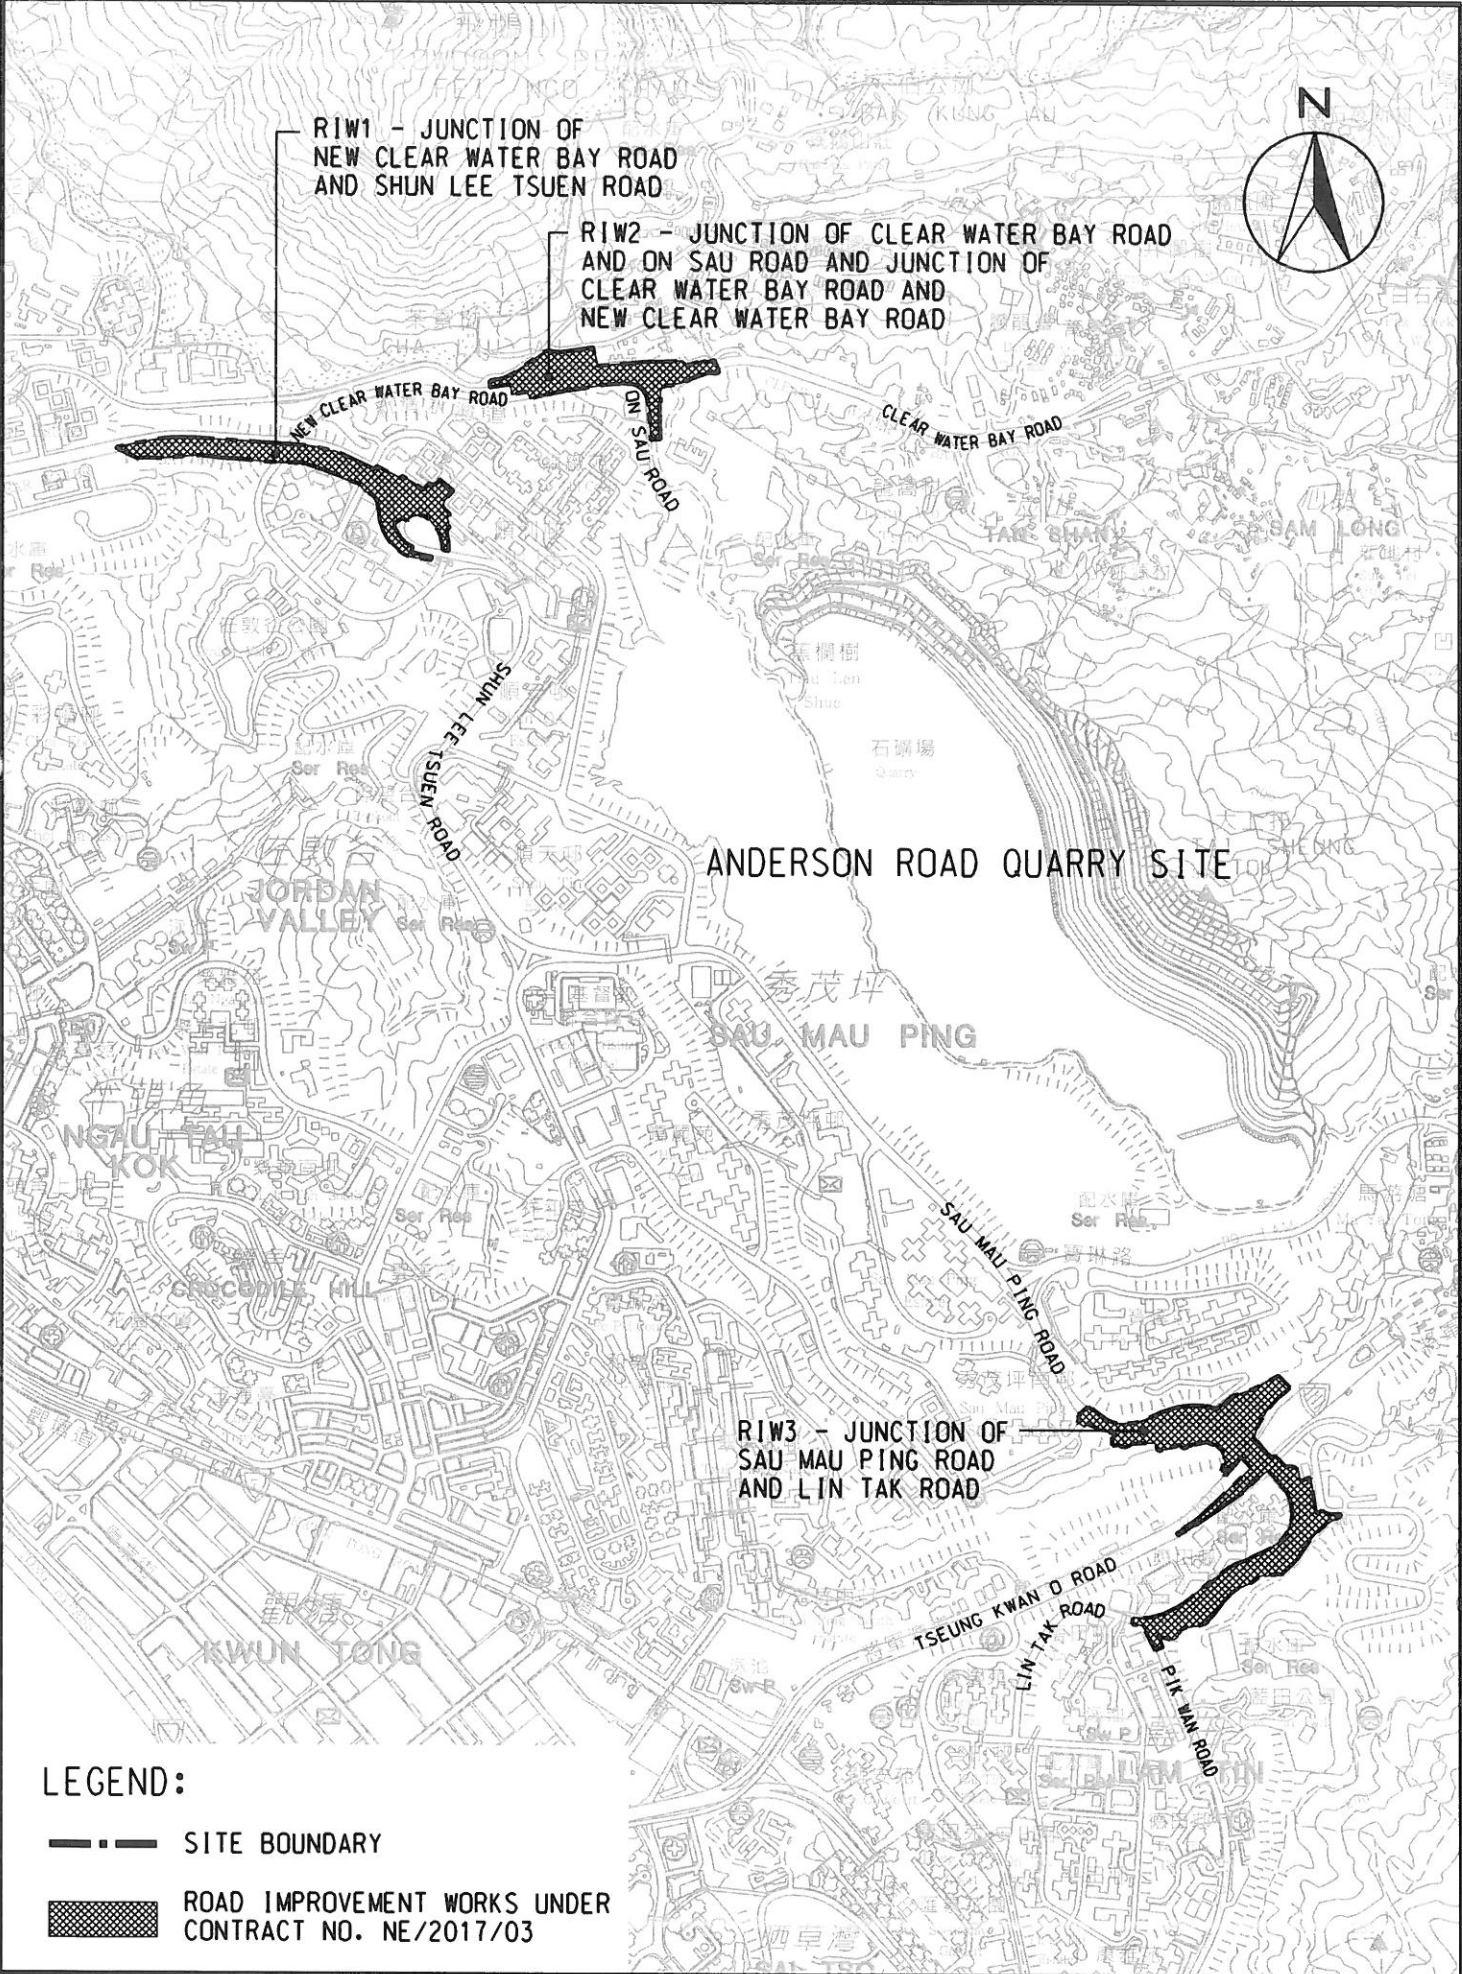

LEGEND:

- SITE BOUNDARY
- ROAD IMPROVEMENT WORKS UNDER CONTRACT NO. NE/2017/03

GENERAL LAYOUT PLAN OF  
ROAD IMPROVEMENT WORKS  
UNDER CONTRACT NO. NE/2017/03

Figure 2.1  
Project Layout



***Figure 2.2***

***Project Organization Chart***



### Project Organization Chart

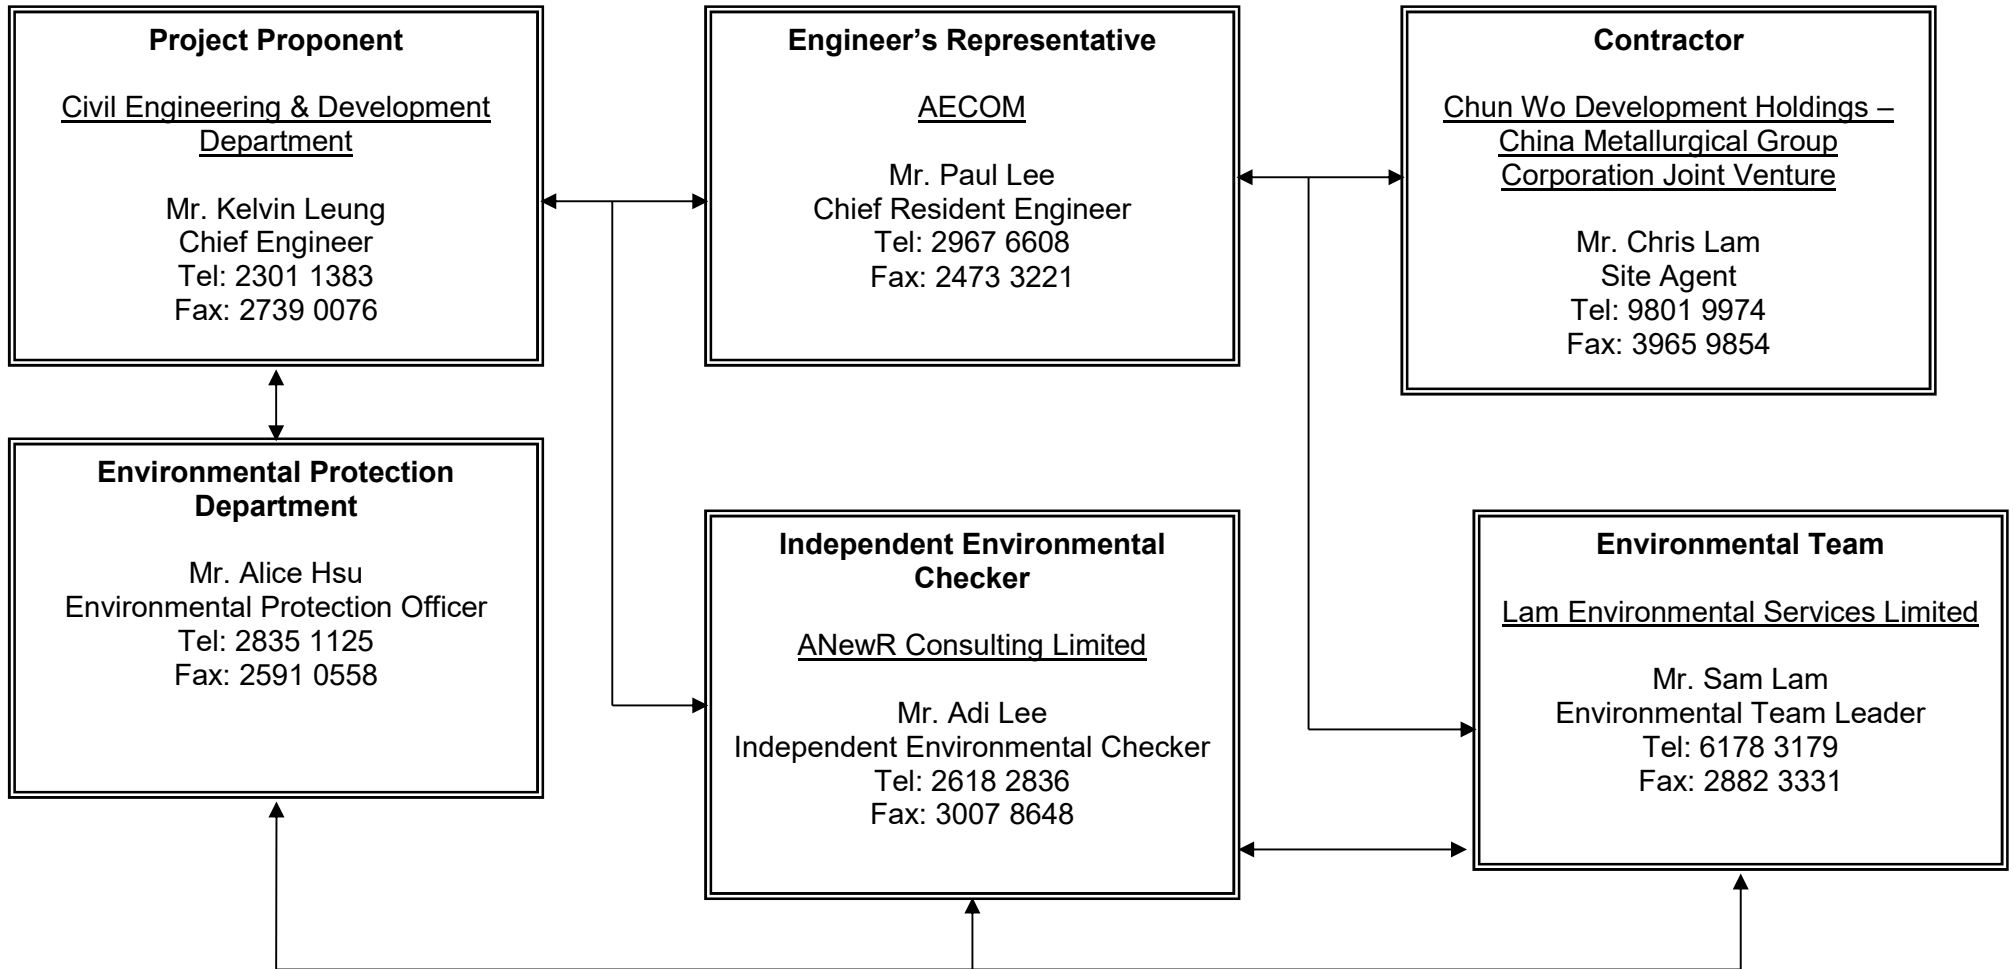



Figure 2.2



***Figure 4.1 to Figure 4.6***

***Locations of Monitoring Stations***




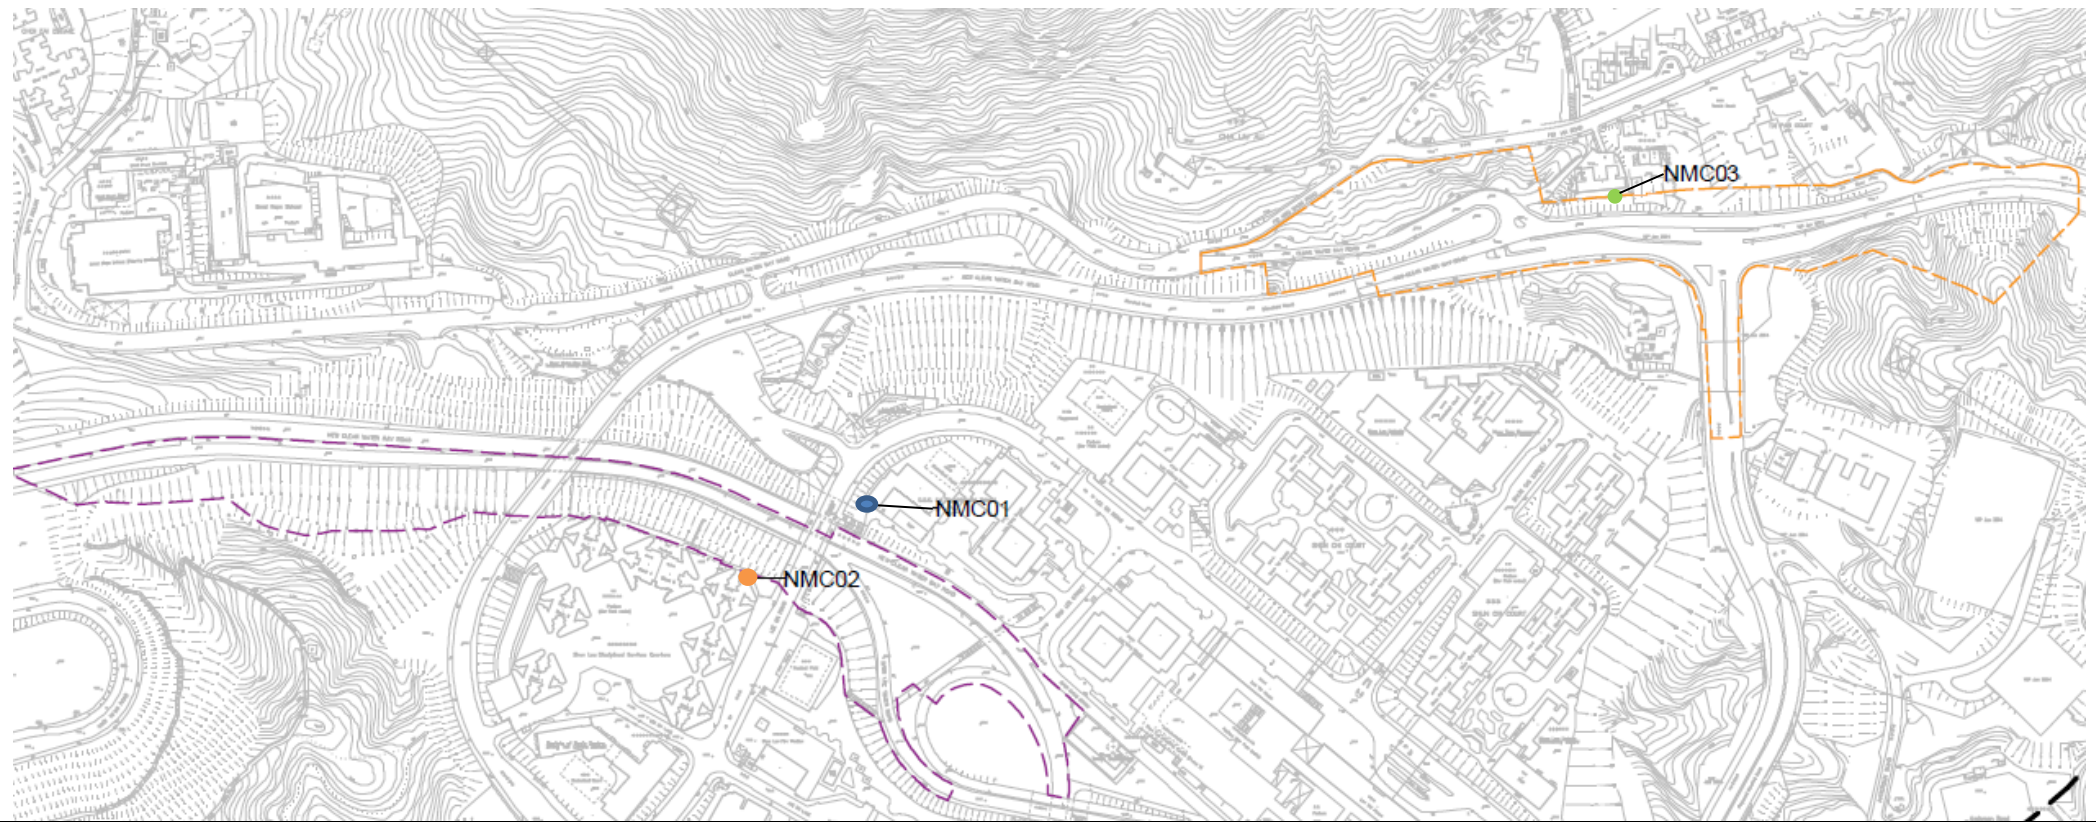

Monitoring Location ID	Description
<i>Noise Monitoring Station (Construction Phase)</i>	
NMC01	Kei Shun Special School
NMC02	Shun Lee Disciplined Services Quarters Block 6
NMC03	Sienna Garden Block 6


Figure 4.1  
 Location of Noise Monitoring Station  
 (Construction Phase)  
 (for Road Improvement Work 1 & 2)



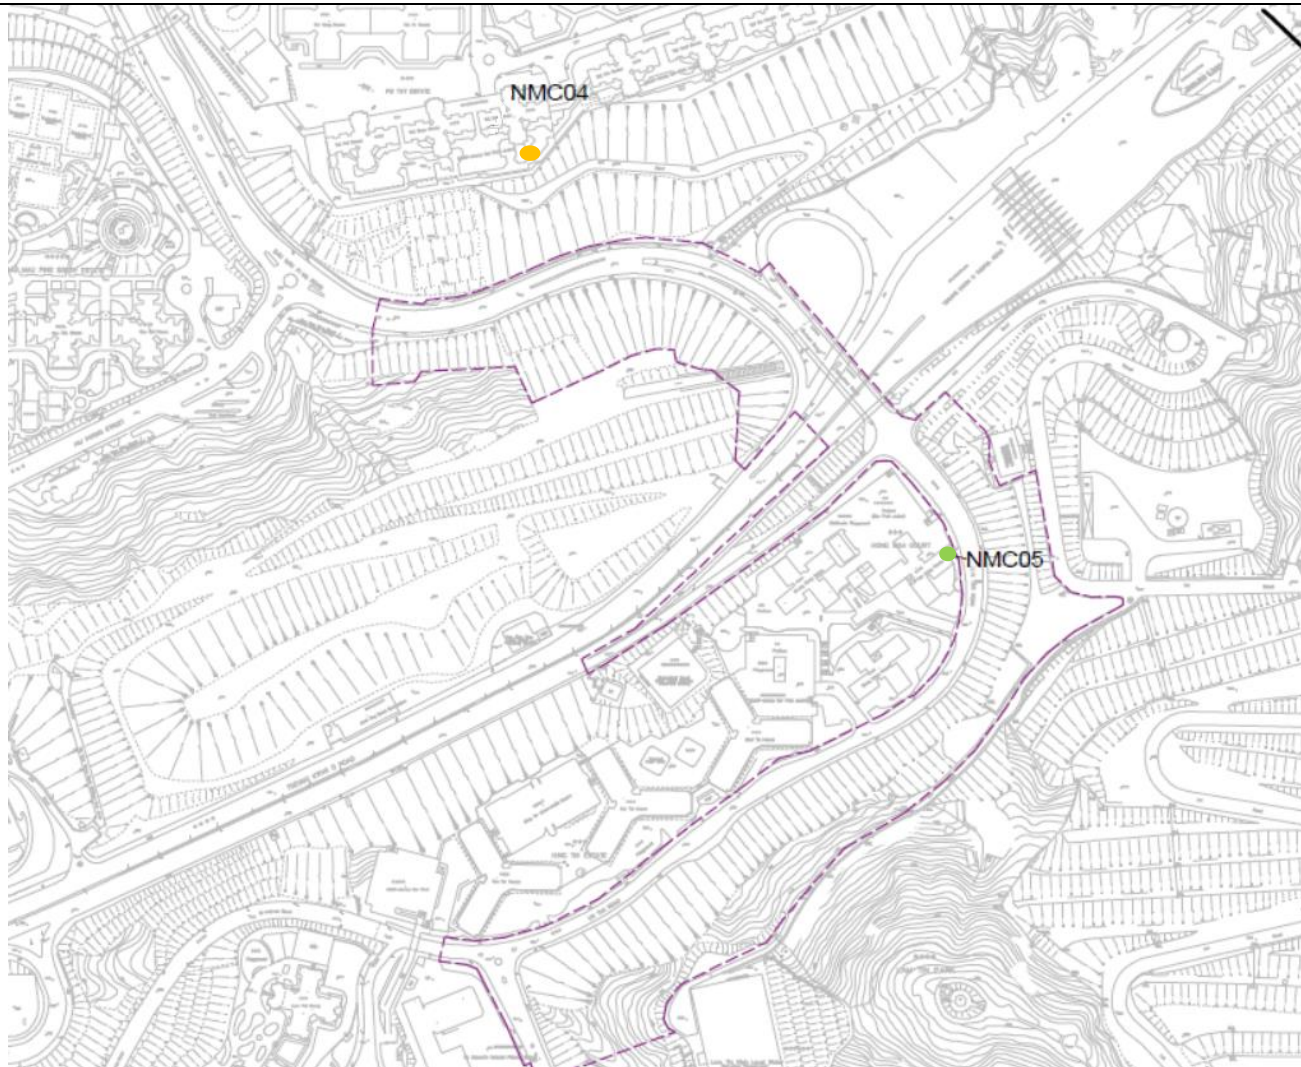

Monitoring Location ID	Description
NMC04	Po Tat Estate Tat Kai House
NMC05	Hong Wah Court Block B Yee Hong House


Figure 4.2  
 Location of Noise Monitoring Station  
 (Construction Phase)  
 (for Road Improvement Work 3)

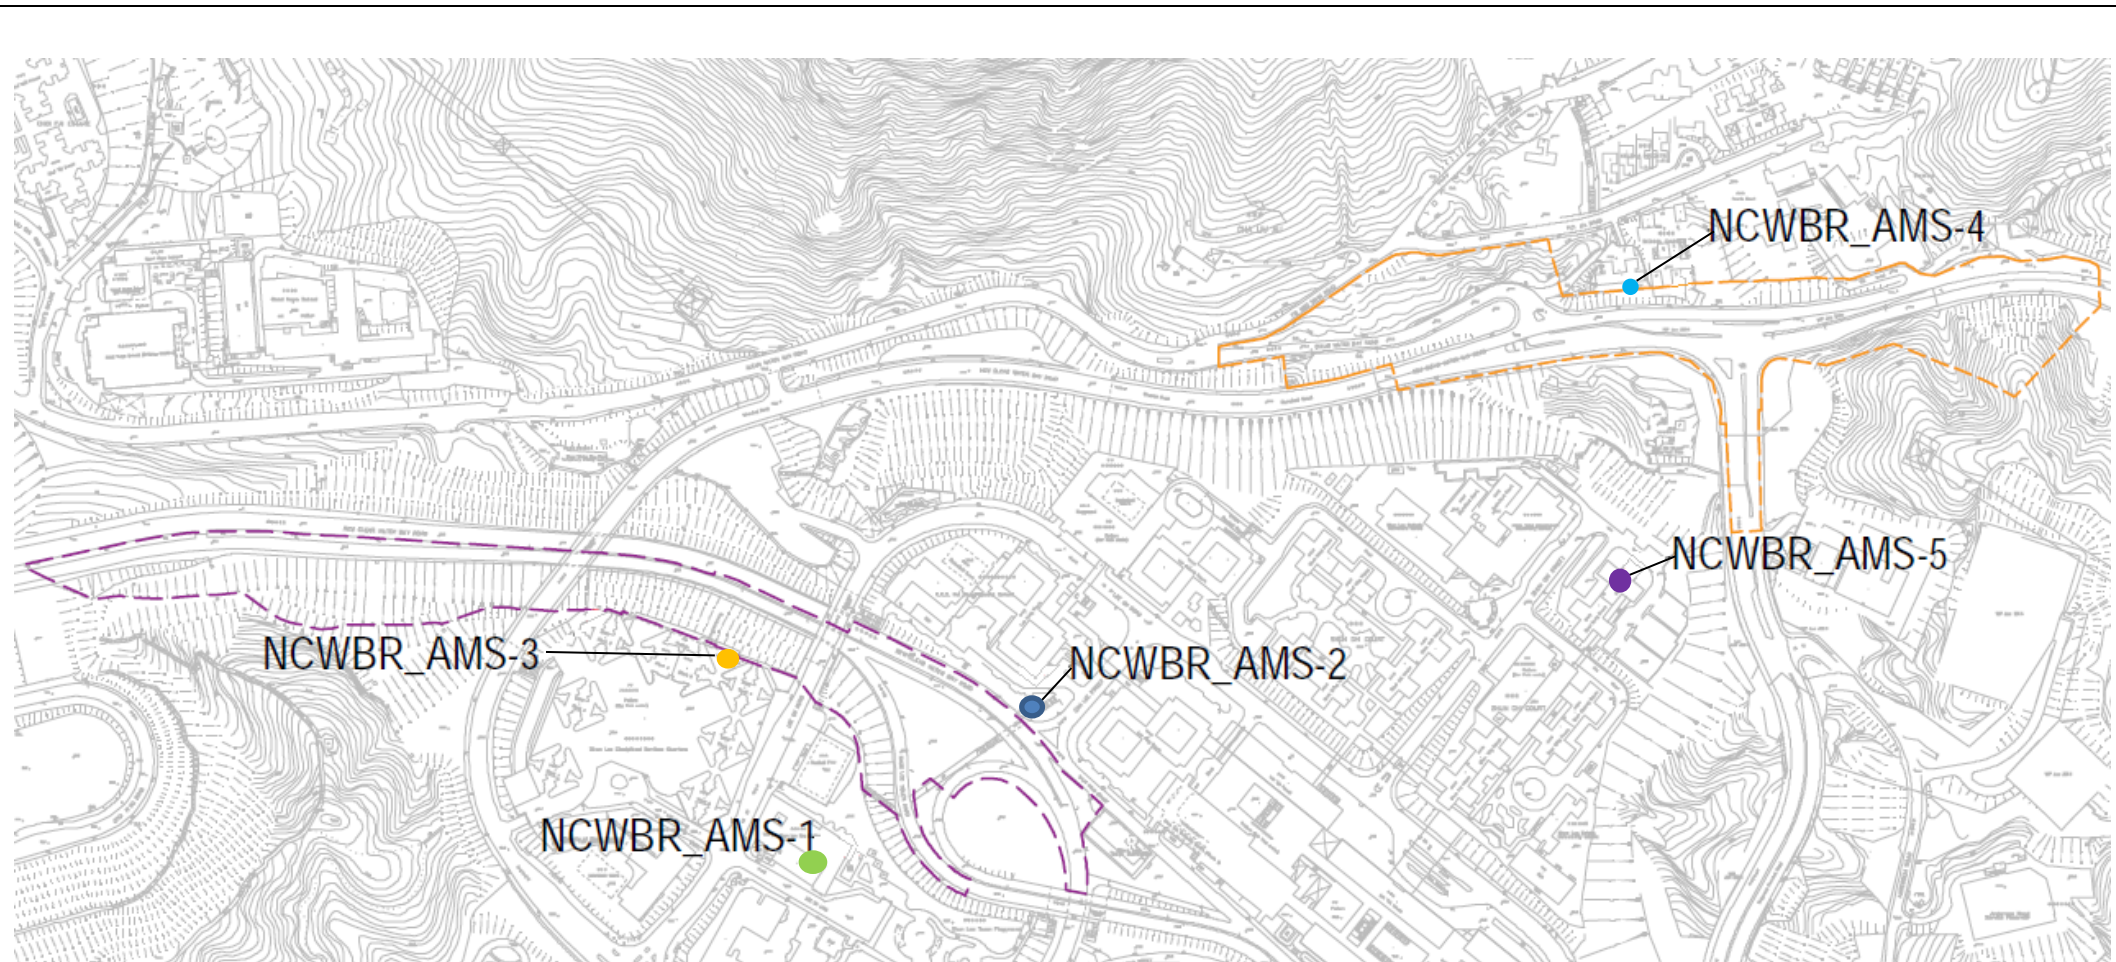

Monitoring Station ID	EIA ID	Location
<b>NCWBR RIW</b>		
NCWBR_AMS-1	ASLF-1	Shun Lee Fire Station
NCWBR_AMS-2	ASLE-21	Shun Lee Estate Lee Hang House
NCWBR_AMS-3	ASLD-10	Shun Lee Disciplined Services Quarters (Block 6)
NCWBR_AMS-4	AFNS-3	Sienna Garden
NCWBR_AMS-5	ASCC-05	Shun Chi Court Shun Fung House

Figure 4.3  
Location of Air Quality Monitoring Station  
(for Road Improvement Work 1 & 2)




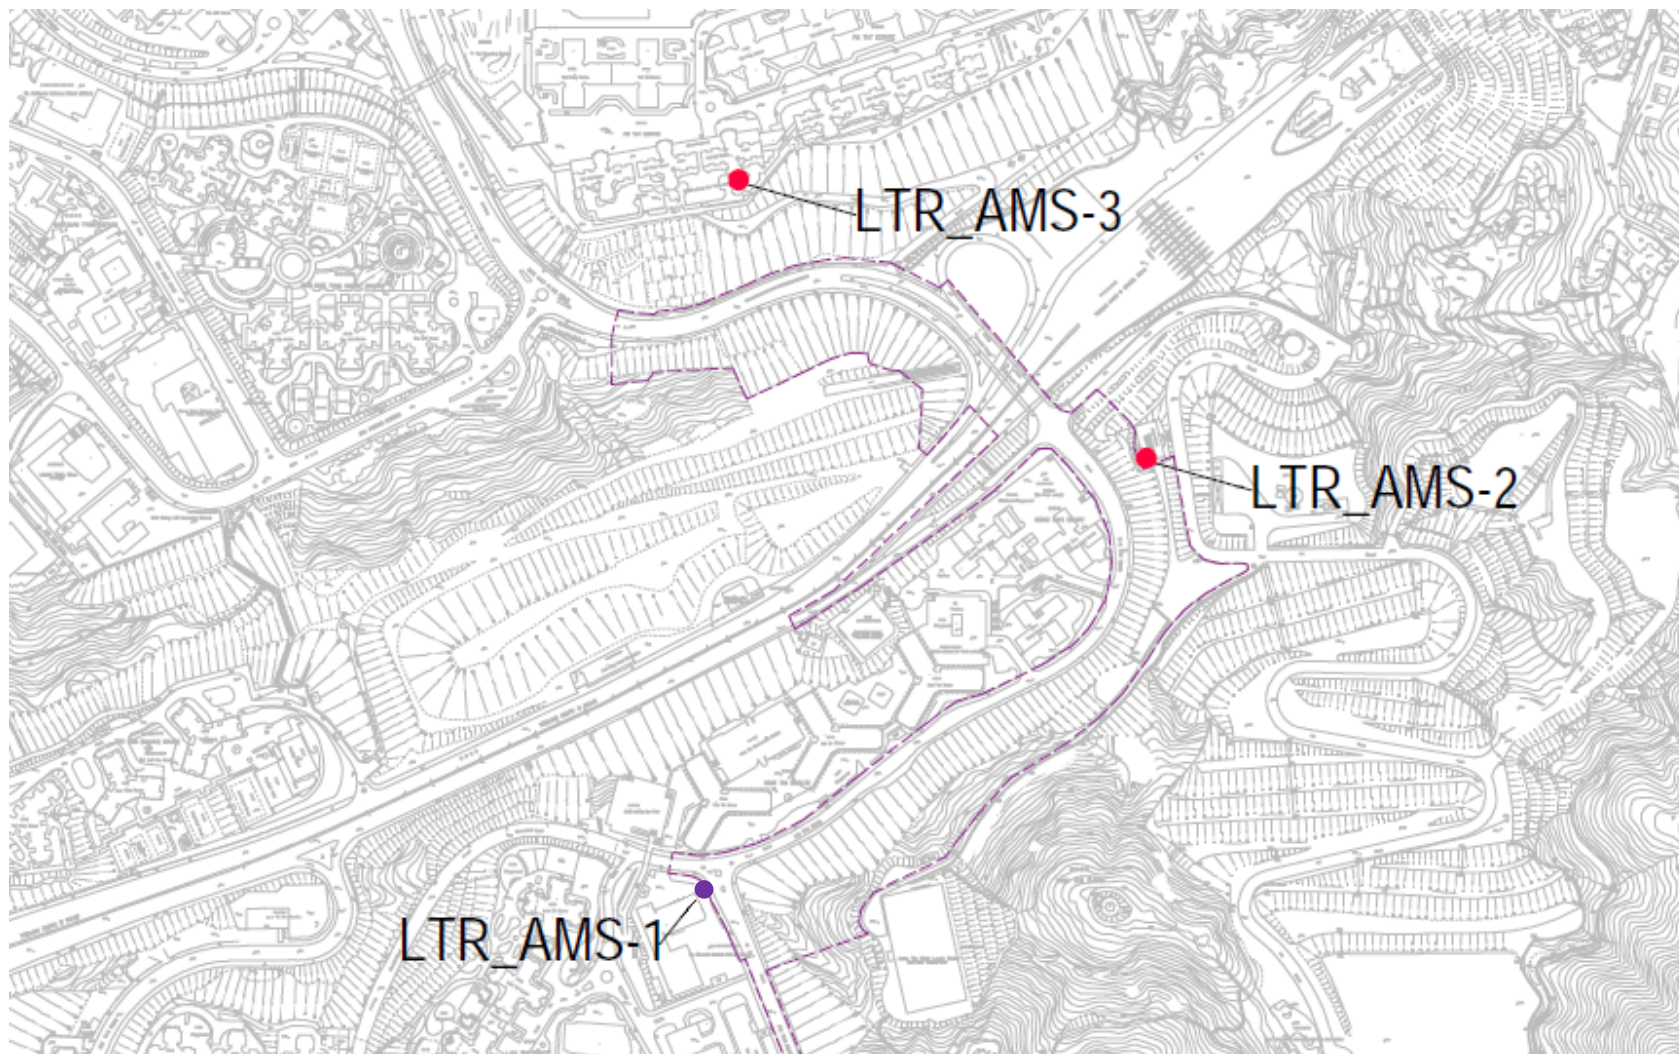

Monitoring Station ID	EIA ID	Location
<b>LTR RIW</b>		
LTR_AMS-1	ASECP-2	St Edward's Catholic Primary School
LTR_AMS-2	AEPD-01	Environmental Protection Department's Restored Landfill Site Office
LTR_AMS-3	APTE-14	Po Tat Estate Tat Kai House

Figure 4.4  
Location of Air Quality Monitoring Station  
(for Road Improvement Work 3)




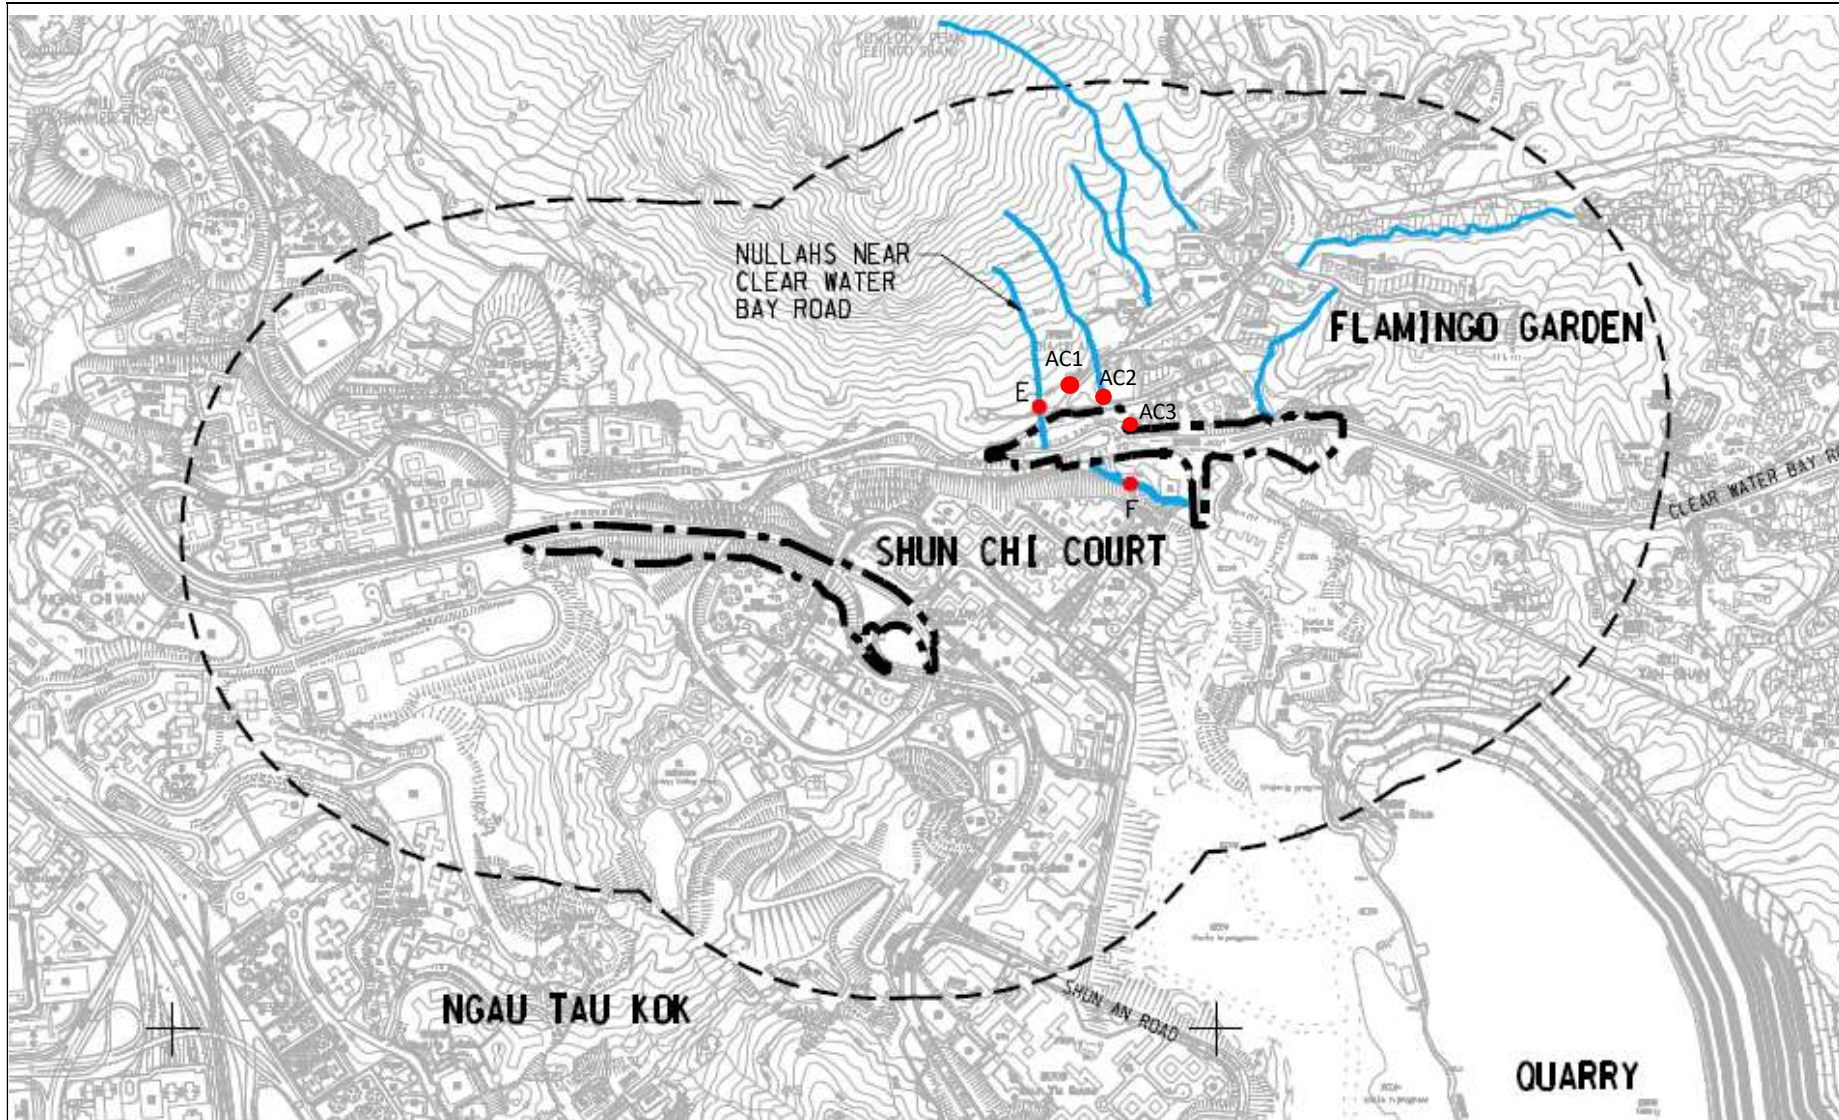

Inland Water	Stations	Description
Channelized nullah across the Project site	E	Upstream Control Station
	F	Downstream Impact Station
	AC1	Upstream Reference Station
	AC2	Upstream Reference Station
	AC3	Upstream Reference Station

Figure 4.5  
Location of Water Quality Monitoring Station  
(for Road Improvement Work 1 & 2)



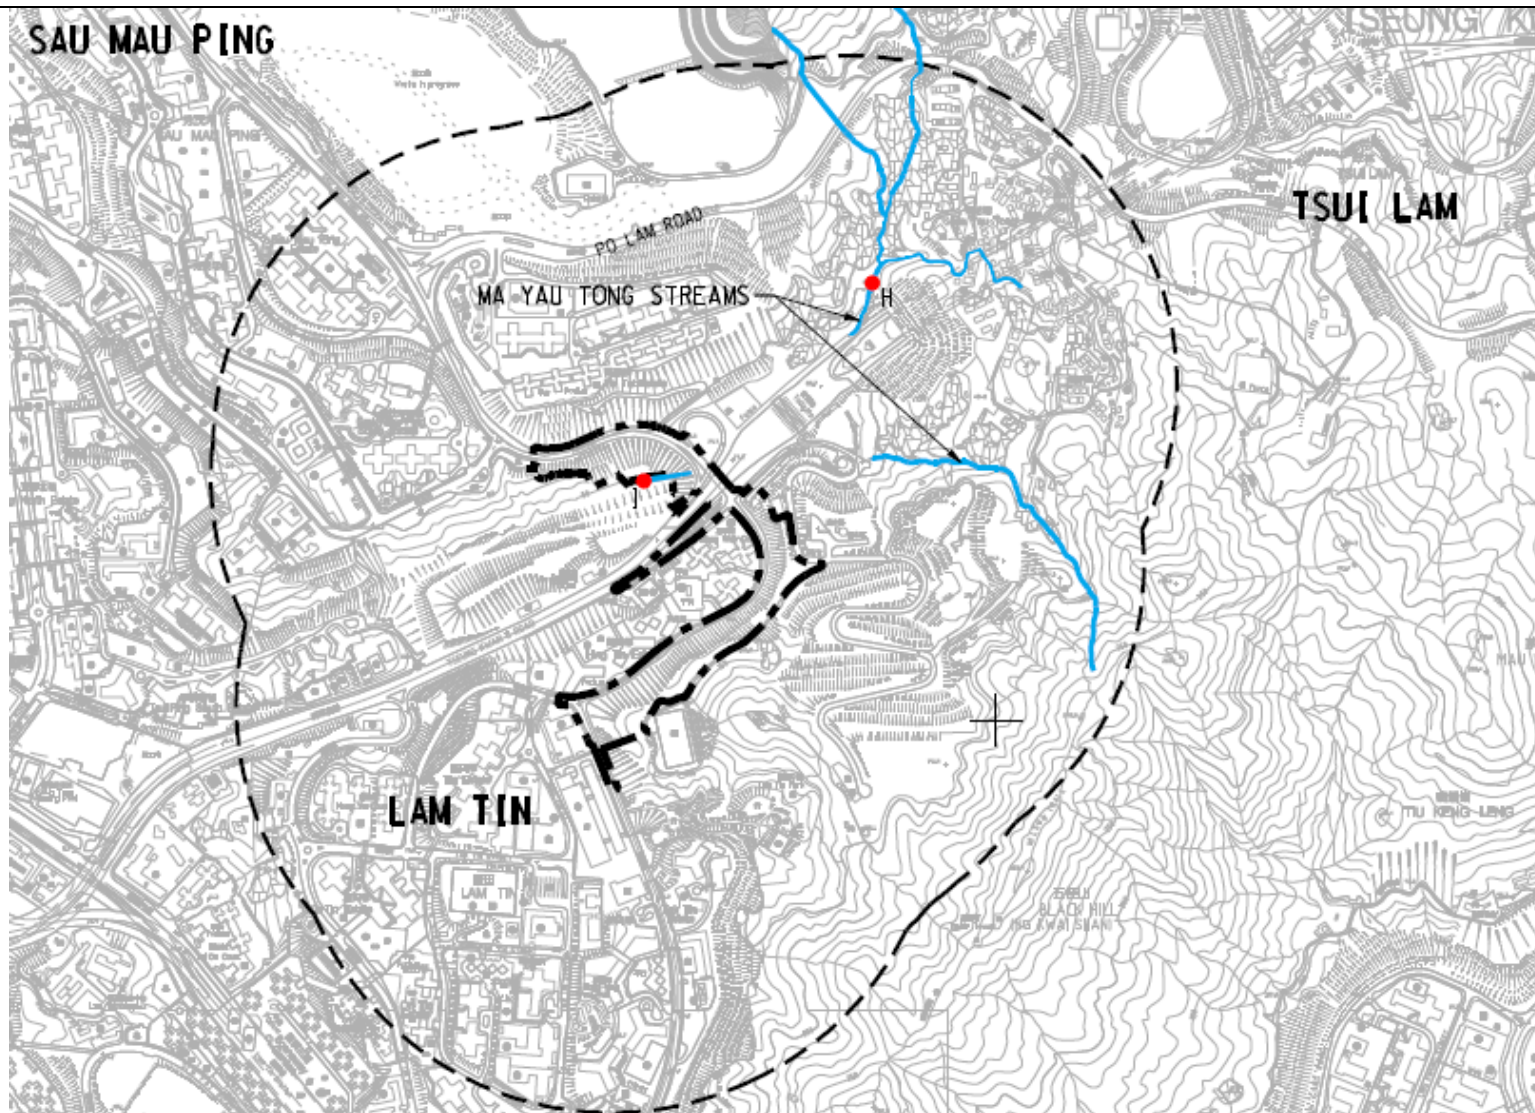

Inland Water	Stations	Description
Ma Yau Tong Stream	H	Upstream Control Station
	I	Downstream Impact Station

Figure 4.6  
Location of Water Quality Monitoring Station  
(for Road Improvement Work 3)



***Appendix 3.1***

***Environmental Mitigation Implementation Schedule***

## APPENDIX C - IMPLEMENTATION SCHEDULE OF MITIGATION MEASURES

### Introduction

This chapter presents the implementation schedule of mitigation measures for the Project. **Table C.1** summarizes the details of the recommended mitigation measures for all works areas. For each recommended mitigation measure, both the location and timing for the mitigation measures have clearly been identified as well as the parties responsible for implementing the mitigation measures and for maintenance (where applicable).

**Table C.1 Implementation Schedule of Mitigation Measures**

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
<b>Air Quality Impact (Construction Phase)</b>								
4.7.1	Hourly watering with intensity of 0.0455 L/m <sup>2</sup> (tentatively) on the active construction area so as to achieve a dust removal efficiency of 87.5%.	Active works areas	CEDD/Contractor		✓			EIAO-TM, AQOs
4.7.2	<ul style="list-style-type: none"> <li>• To minimize the dust impact to the surrounding ASRs, dust suppression measures stipulated in the Air Pollution Control (Construction Dust) Regulation should be incorporated to control dust emission from the site. Major control measures relevant to this Project are listed below, and they are recommended to be included in relevant contract documents.</li> <li>- Any excavated or stockpile of dusty material should be covered entirely by impervious sheeting or sprayed with water to maintain the entire surface wet and then removed or backfilled or reinstated where practicable within 24 hours of the excavation or unloading;</li> <li>- Any dusty material remaining after a stockpile is removed should be wetted with water and cleared from the surface of roads;</li> <li>- A stockpile of dusty material should not extend beyond the pedestrian barriers, fencing or traffic cones;</li> <li>- The load of dusty materials on a vehicles leaving a construction site should be covered entirely by impervious sheeting to ensure that the dusty materials do not leak form the vehicle;</li> </ul>	All works areas	CEDD/Contractor		✓			Air Pollution Control (Construction Dust) Regulation

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<ul style="list-style-type: none"> <li>- Where practicable, vehicles washing facilities including a high pressure water jet should be provided at every discernible or designated vehicle exit point. The area where vehicle washing takes place and the road section between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores;</li> <li>- When there are open excavation and reinstatement works, hoarding of not less than 2.4m high should be provided as far as practicable along the site boundary with provision for public crossing. Good site practice shall also be adopted by the Contractor to ensure the conditions of the hoardings are properly maintained throughout the construction period;</li> <li>- The portion of any road leading only to construction site that is within 30m of a vehicle entrance or exit should be kept clear of dusty materials;</li> <li>- Surfaces where any pneumatic or power-driven drilling, cutting, polishing or other mechanical breaking operation takes place should be sprayed with water or a dust suppression chemical continuously;</li> <li>- Any area that involves demolition activities should be sprayed with water or a dust suppression chemical immediately prior to, during and immediately after the activities so as to maintain the entire surface wet;</li> <li>- Where a scaffolding is erected around the perimeter of a building under construction, effective dust screens, sheeting or netting should be provided to enclose the scaffolding from the ground floor level of the building, or a canopy should be provided from the first floor level up to the highest level of the scaffolding;</li> <li>- Any skip hoist for material transport should be totally enclosed by impervious sheeting;</li> <li>- Every stock of more than 20 bags of cement or dry pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the three sides;</li> </ul>							



EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<ul style="list-style-type: none"> <li>- Cement or dry PFA delivered in bulk should be stored in a closed silo fitted with an audible high level alarm which is interlocked with the material filling line and no overfilling is allowed; and</li> <li>- Exposed earth should be properly treated by compaction, turfing, hydroseeding, vegetation planting or sealing with latex, vinyl, bitumen, shortcrete or other suitable surface stabiliser within six months after the last construction activity on the construction site or part of the construction site where the exposed earth lies.</li> </ul>							
<b>Air Quality Impact (Operational Phase)</b>								
N/A	N/A	N/A	N/A					N/A
<b>Noise Impact (Construction Phase)</b>								
5.8.1 – 5.8.4	<u>Adoption of Quiet PMEs</u> <ul style="list-style-type: none"> <li>• To reduce the noise impacts at the affected NSRs during normal daytime working hours, mitigation measures such as adopting quiet PME and construction noise barriers are recommended.</li> </ul> <u>Construction Noise Barriers</u> <ul style="list-style-type: none"> <li>• To alleviate the construction noise impact on the affected NSRs, construction noise barriers or enclosures would be erected to provide screening from the construction plant.</li> </ul>	All works areas	CEDD/Contractor		✓			EIAO-TM
<b>Noise Impact (Operational Phase)</b>								
5.8.5	Direct mitigation measures in the form of Vertical Noise Barriers, Cantilevered Noise Barriers, Semi-Enclosures and Full Enclosures are proposed on the Project Roads such that the noise level would be reduced to fulfil the EIAO requirements for RIW sites at: <ul style="list-style-type: none"> <li>• Sau Mau Ping Road and Lin Tak Road,</li> <li>• J/O Clear Water Bay Road and On Sau Road and</li> <li>• New Clear Water Bay Road and Shun Lee Tsuen Road</li> </ul>	Project roads	CEDD/Contractor			✓		EIAO-TM

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	•							
<b>Water Quality Impact (Construction Phase)</b>								
6.9.1 - 6.9.13	<p><u>Construction Site Run-off and General Construction Activities</u></p> <p><i>Boring and Drilling Water</i></p> <ul style="list-style-type: none"> <li>Water used in ground boring and drilling for site investigation or rock / soil anchoring should as far as practicable be re-circulated after sedimentation. When there is a need for final disposal, the wastewater should be discharged into storm drains via silt removal facilities.</li> </ul> <p><i>Wheel Washing Water</i></p> <ul style="list-style-type: none"> <li>All vehicles and plant should be cleaned before they leave a construction site to minimize the deposition of earth, mud, debris on roads. A wheel washing bay should be provided at every site exit if practicable and wash-water should have sand and silt settled out or removed before discharging into storm drains. The section of construction road between the wheel washing bay and the public road should be paved with backfill to reduce vehicle tracking of soil and to prevent site run-off from entering public road drains.</li> </ul> <p><i>Rubbish and Litter</i></p> <ul style="list-style-type: none"> <li>Good site practices should be adopted to remove rubbish and litter from construction sites so as to prevent the rubbish and litter from spreading from the site area. It is recommended to clean the construction sites on a regular basis.</li> </ul> <p><i>Construction Site Run-off</i></p> <ul style="list-style-type: none"> <li>The site practices outlined in ProPECC PN 1/94 "Construction Site Drainage" should be followed as far as practicable to minimise surface run-off and the chance of erosion. The following measures are recommended to protect water quality and sensitive uses of the coastal area, and when properly implemented should be sufficient to adequately control site discharges so as to avoid water quality impact.</li> <li>Surface run-off from construction sites should be discharged into storm drains via adequately designed sand/silt removal facilities</li> </ul>	All works areas	CEDD/Contractor		✓			<p>ProPECC PN 1/94 Construction Site Drainage</p> <p>TM-DSS</p> <p>Water Pollution Control Ordinance</p>

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>such as sand traps, silt traps and sedimentation basins. Channels or earth bunds or sand bag barriers should be provided on site to properly direct stormwater to such silt removal facilities. Perimeter channels at site boundaries should be provided on site boundaries where necessary to intercept storm run-off from outside the site so that it will not wash across the site. Catchpits and perimeter channels should be constructed in advance of site formation works and earthworks.</p> <ul style="list-style-type: none"> <li>• Silt removal facilities, channels and manholes should be maintained and the deposited silt and grit should be removed regularly, at the onset of and after each rainstorm to prevent local flooding. Any practical options for the diversion and re-alignment of drainage should comply with both engineering and environmental requirements in order to provide adequate hydraulic capacity of all drains. Minimum distance of 100m should be maintained between the discharge points of construction site run-off and the existing saltwater intakes. No effluent will be discharged into typhoon shelter.</li> <li>• Construction works should be programmed to minimize soil excavation works in rainy seasons (April to September). If excavation in soil cannot be avoided in these months or at any time of year when rainstorms are likely, for the purpose of preventing soil erosion, temporary exposed slope surfaces should be covered e.g. by tarpaulin, and temporary access roads should be protected by crushed stone or gravel, as excavation proceeds. Intercepting channels should be provided (e.g. along the crest / edge of excavation) to prevent storm runoff from washing across exposed soil surfaces. Arrangements should always be in place in such a way that adequate surface protection measures can be safely carried out well before the arrival of a rainstorm.</li> <li>• Earthworks final surfaces should be well compacted and the subsequent permanent work or surface protection should be carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms. Appropriate drainage like intercepting channels should be provided where necessary.</li> <li>• Measures should be taken to minimize the ingress of rainwater into trenches. If excavation of trenches in wet seasons is necessary, they should be dug and backfilled in short sections. Rainwater</li> </ul>							

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>pumped out from trenches or foundation excavations should be discharged into storm drains via silt removal facilities.</p> <ul style="list-style-type: none"> <li>Construction materials (e.g. aggregates, sand and fill material) on sites should be covered with tarpaulin or similar fabric during rainstorms.</li> <li>Manholes (including newly constructed ones) should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers. Discharge of surface run-off into foul sewers must always be prevented in order not to unduly overload the foul sewerage system.</li> <li>Good site practices should be adopted to remove rubbish and litter from construction sites so as to prevent the rubbish and litter from spreading from the site area. It is recommended to clean the construction sites on a regular basis.</li> </ul> <p><i>Site Effluent</i></p> <ul style="list-style-type: none"> <li>There is a need to apply to EPD for a discharge licence for discharge of effluent from the construction site under the WPCO. The discharge quality must meet the requirements specified in the discharge licence. All the runoff and wastewater generated from the works areas should be treated so that it satisfies all the standards listed in the TM-DSS. The beneficial uses of the treated effluent for other on-site activities such as dust suppression, wheel washing and general cleaning etc., can minimise water consumption and reduce the effluent discharge volume. If monitoring of the treated effluent quality from the works areas is required during the construction phase of the Project, the monitoring should be carried out in accordance with the relevant WPCO licence which is under the ambit of regional office (RO) of EPD.</li> </ul>							
6.9.14 - 6.9.16	<p><u>Accidental Spillage and Potential Contamination of Surface Water and Groundwater</u></p> <ul style="list-style-type: none"> <li>Contractor must register as a chemical waste producer if chemical wastes would be produced from the construction activities. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations</li> </ul>	All works areas	CEDD/Contractor		✓			<p>Waste Disposal Ordinance</p> <p>Waste Disposal (Chemical Waste)</p>

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>in particular the Waste Disposal (Chemical Waste) (General) Regulation, should be observed and complied with for control of chemical wastes.</p> <ul style="list-style-type: none"> <li>Any service shop and maintenance facilities should be located on hard standings within a bunded area, and sumps and oil interceptors should be provided. Maintenance of vehicles and equipment involving activities with potential for leakage and spillage should only be undertaken within the areas appropriately equipped to control these discharges.</li> <li>Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance details the requirements to deal with chemical wastes. General requirements are given as follows: <ul style="list-style-type: none"> <li>Suitable containers should be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport;</li> <li>Chemical waste containers should be suitably labelled, to notify and warn the personnel who are handling the wastes, to avoid accidents; and</li> <li>Storage area should be selected at a safe location on site and adequate space should be allocated to the storage area.</li> </ul> </li> </ul>							<p>(General) Regulation</p> <p>The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes</p>
6.9.17 - 6.9.18	<p><u>Sewage Effluent from Construction Workforce</u></p> <ul style="list-style-type: none"> <li>The construction workforce on site will generate sewage. It is recommended to provide sufficient chemical toilets in the works areas. A licensed waste collector should be deployed to clean the chemical toilets on a regular basis.</li> <li>Notices should be posted at conspicuous locations to remind the workers not to discharge any sewage or wastewater into the surrounding environment. Regular environmental audit of the construction site will provide an effective control of any malpractices and can encourage continual improvement of environmental performance on site. It is anticipated that sewage generation during the construction phase of the project would not cause water</li> </ul>	All works areas	CEDD/Contractor		✓			Water Pollution Control Ordinance

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	pollution problem after undertaking all required measures.							
6.9.19	<p><u>Construction Works in Close Proximity of Inland Waters</u></p> <ul style="list-style-type: none"> <li>The practices outlined in ETWB TC (Works) No. 5/2005 "Protection of natural streams/rivers from adverse impacts arising from construction works" should also be adopted where applicable to minimize the water quality impacts upon any natural streams or surface water systems. Relevant mitigation measures from the ETWB TC (Works) No. 5/2005 are listed below: <ul style="list-style-type: none"> <li>Construction works close to the inland waters should be carried out in dry season as far as practicable where the flow in the surface channel or stream is low.</li> <li>The use of less or smaller construction plants may be specified in areas close to the water courses to reduce the disturbance to the surface water.</li> <li>Temporary storage of materials (e.g. equipment, chemicals and fuel) and temporary stockpile of construction materials should be located well away from any water courses during carrying out of the construction works.</li> <li>Stockpiling of construction materials and dusty materials should be covered and located away from any water courses.</li> <li>Construction debris and spoil should be covered up and/or disposed of as soon as possible to avoid being washed into the nearby water receivers.</li> <li>Proper shoring may need to be erected in order to prevent soil or mud from slipping into the watercourses.</li> </ul> </li> </ul>	All works areas	CEDD/Contractor		✓			Water Pollution Control Ordinance
<b>Water Quality Impact (Operational Phase)</b>								
6.9.20 - 6.9.23	<ul style="list-style-type: none"> <li>Best Management Practices (BMPs) to reduce storm water and non-point source pollution have been proposed for the RIW as follows: <p><i>Design Measures</i></p> <ul style="list-style-type: none"> <li>Exposed surface shall be avoided within the RIW sites to minimize soil erosion. The development site shall be either hard paved or</li> </ul> </li> </ul>	All works areas	CEDD/HyD	✓		✓		Water Pollution Control Ordinance

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>covered by landscaping area where appropriate.</p> <ul style="list-style-type: none"> <li>The streams and channelized nullahs near the RIW sites will be retained to maintain the original flow path. The drainage system will be designed to avoid flooding.</li> <li>Green areas / tree / shrub planting etc. will be introduced along roadside amenity strips and central dividers as far as possible, which can help to reduce soil erosion.</li> <li>Evergreen trees species, which in general generate relatively smaller amount of fallen leaves, should be selected where possible.</li> </ul> <p><i>Devices/ Facilities to Control Pollution</i></p> <ul style="list-style-type: none"> <li>Screening facilities such as standard gully grating and trash grille, with spacing which is capable of screening off large substances such as fallen leaves and rubbish should be provided at the inlet of drainage system.</li> <li>Road gullies with standard design and silt traps and oil interceptors should be incorporated during the detailed design to remove particles present in stormwater runoff, where appropriate.</li> </ul> <p><i>Administrative Measures</i></p> <ul style="list-style-type: none"> <li>Good management measures such as regular cleaning and sweeping of road surface/ open areas are suggested. The road surface/ open area cleaning should also be carried out prior to occurrence rainstorm.</li> <li>Manholes, as well as stormwater gullies, ditches provided at the Project sites should be regularly inspected and cleaned (e.g. monthly). Additional inspection and cleansing should be carried out before forecast heavy rainfall.</li> </ul>							
<b>Waste Management Implication (Construction Phase)</b>								
7.6.1 – 7.6.3	<p><u>Good Site Practices</u></p> <ul style="list-style-type: none"> <li>Appropriate waste handling, transportation and disposal methods for all waste arising generated during the construction works for the Project should be implemented to ensure that construction wastes do not enter the nearby streams or drainage channel.</li> <li>It is anticipated that adverse impacts would not arise on the</li> </ul>	All works areas	CEDD/Contractor		✓			<p>Waste Disposal Ordinance</p> <p>DEVB TCW No. 6/2010, ETWB TCW No. 19/2005</p>

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>construction site, provided that good site practices are strictly followed. Recommendations for good site practices during the construction activities include:</p> <ul style="list-style-type: none"> <li>- Nomination of approved personnel, such as a site manager, to be responsible for good site practices, and making arrangements for collection of all wastes generated at the site and effective disposal to an appropriate facility.</li> <li>- Training of site personnel in proper waste management and chemical waste handling procedures.</li> <li>- Provision of sufficient waste reception/ disposal points, of a suitable vermin-proof design that minimises windblown litter.</li> <li>- Arrangement for regular collection of waste for transport off-site and final disposal.</li> <li>- Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers.</li> <li>- Regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors.</li> <li>- A recording system for the amount of wastes generated, recycled and disposed (including the disposal sites) should be proposed.</li> <li>- A Waste Management Plan should be prepared and should be submitted to the Engineer for approval. One may make reference to <i>ETWB TCW No. 19/2005</i> for details.</li> </ul> <ul style="list-style-type: none"> <li>• In order to monitor the disposal of C&amp;D materials at landfills and public filling areas, as appropriate, and to control fly tipping, a trip-ticket system should be included as one of the contractual requirements to be implemented by an Environmental Team undertaking the Environmental Monitoring and Audit work. One may take reference to <i>DEVB TCW No.6/2010</i> for details.</li> </ul>							
7.6.4 – 7.6.5	<p><u>Waste Reduction Measures</u></p> <ul style="list-style-type: none"> <li>• Good management and control of construction site activities/</li> </ul>	All works areas	CEDD/Contractor	✓	✓			Waste Disposal Ordinance



EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>processes can minimise the generation of waste. Waste reduction is best achieved at the planning and design stage, as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include:</p> <ul style="list-style-type: none"> <li>- Segregate and store different types of construction related waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal.</li> <li>- Provide separate labelled bins to segregate recyclable waste such as aluminium cans from other general refuse generated by the work force, and to encourage collection by individual collectors.</li> <li>- Any unused chemicals or those with remaining functional capacity shall be recycled.</li> <li>- Maximising the use of reusable steel formwork to reduce the amount of C&amp;D materials.</li> <li>- Prior to disposal of C&amp;D waste, it is recommended that wood, steel and other metals shall be separated for re-use and / or recycling to minimise the quantity of waste to be disposed of to landfill.</li> <li>- Adopt proper storage and site practices to minimise the potential for damage to, or contamination of, construction materials.</li> <li>- Plan the delivery and stock of construction materials carefully to minimise the amount of waste generated.</li> <li>- Minimize over ordering of concrete, mortars and cement grout by doing careful check before ordering.</li> </ul> <ul style="list-style-type: none"> <li>• In addition to the above measures, other specific mitigation measures are recommended below to minimise environmental impacts during handling, transportation and disposal of wastes.</li> </ul>							ETWB TCW No. 19/2005
7.6.6 – 7.6.8	<p><u>Construction and Demolition Materials</u></p> <ul style="list-style-type: none"> <li>• The C&amp;D materials generated from site clearance, demolition of existing roads, slope excavation works, and construction of new</li> </ul>	All works areas	CEDD/Contractor		✓			Waste Disposal Ordinance Waste Disposal

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>roads, retaining wall and piling works should be sorted on-site into inert C&amp;D materials (that is, public fill) and C&amp;D waste. To minimise the impact resulting from collection and transportation of C&amp;D materials as far as practicable. C&amp;D waste, such as wood, plastic, steel and other metals should be reused or recycled and, as a last resort, disposed to landfill. A suitable area should be designated within the site for temporary stockpiling of C&amp;D materials and to facilitate the sorting process. Within the stockpile areas, the following measures should be taken to control potential environmental impacts or nuisance:</p> <ul style="list-style-type: none"> <li>- Waste such as soil should be handled and stored well to ensure secure containment;</li> <li>- Covering material during heavy rainfall;</li> <li>- Stockpiling area should be provided with covers and water spraying system to prevent materials from wind-blown or being washed away;</li> <li>- Locating stockpiles to minimise potential visual impacts; and</li> <li>- Minimising land intake of stockpile areas as far as possible.</li> </ul> <p><u>General Refuse</u></p> <ul style="list-style-type: none"> <li>• General refuse should be stored in enclosed bins or compaction units separate from C&amp;D materials. A reputable waste collector should be employed by the contractor to remove general refuse from the site, separately from C&amp;D materials. An enclosed and covered area is preferred to reduce the occurrence of 'wind blown' light material.</li> </ul> <p><u>Chemical Wastes</u></p> <ul style="list-style-type: none"> <li>• If chemical wastes were to be produced at the construction site, the Contractor would be required to register with the EPD as a Chemical Waste Producer, and to follow the guidelines stated in the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Good quality containers compatible with the chemical wastes should be used, and incompatible chemicals should be stored separately. Appropriate labels should be securely attached on each chemical waste container indicating the</li> </ul>						<p>(Chemical Waste) (General) Regulation</p> <p>Public Health and Municipal Services Ordinance (Cap. 132) - Public Cleansing and Prevention of Nuisances Regulation</p> <p>Land (Miscellaneous Provisions) Ordinance</p> <p>Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes</p> <p>Packaging, Labelling and Storage of Chemical Wastes</p>	

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	corresponding chemical characteristics of the waste such as explosive, flammable, oxidizing, irritant, toxic, harmful, corrosive, etc. The Contractor shall use a licensed collector to transport the chemical wastes. The licensed collector shall deliver the waste to the Chemical Waste Treatment Centre at Tsing Yi, or other licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.							
<b>Waste Management Implication (Operational Phase)</b>								
N/A	N/A	N/A	N/A					
<b>Land Contamination (Construction Phase)</b>								
N/A	N/A	N/A	N/A					
<b>Land Contamination (Operational Phase)</b>								
N/A	N/A	N/A	N/A					
<b>Ecological Impact (Terrestrial) (Construction Phase)</b>								
9.13.2-9.13.5	<p>Measures to Avoid/ Minimize Impacts to Flora Species of Conservation Importance</p> <ul style="list-style-type: none"> <li>Within the Project Site boundary, two flora species of conservation importance (Incense Tree and Luofushan Joint-fir) would be subject to direct impacts. A detailed vegetation survey should be conducted by a qualified ecologist / botanist within the Project Site boundary.</li> <li>A Transplantation Proposal should be prepared by a qualified ecologist / botanist with detailed findings of the vegetation survey (i.e. number and locations of the affected individuals, assessment of the suitability and / or practicality of the transplantation) and locations of receptor site(s), transplantation methodology, implementation programme of transplantation, post-transplantation monitoring and maintenance programme. The proposal should be submitted to and approved by AFCD prior to commencement of any works (including ground investigation. The approved transplantation works should be supervised by a qualified botanist / horticulturist / Certified Arborist with relevant experience in transplanting flora species of conservation importance. After transplantation, a 3-year monitoring and maintenance programme</li> </ul>	All works areas	CEDD/Contractor		✓			EIAO-TM

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>of the transplanted species should be conducted to ensure the establishment of the transplanted trees.</p> <ul style="list-style-type: none"> <li>Hoarding or fencing should be erected around the works areas during the construction phase to restrict access, to adjacent habitats supporting flora species of conservation importance, by site workers and to reduce human disturbance.</li> </ul>							
9.13.6-9.13.8	<p>Measures to Avoid/ Minimize Habitat Loss to Woodland and Plantation</p> <ul style="list-style-type: none"> <li>Habitat loss could be avoided in the first instance by retaining existing vegetation wherever possible, particularly mature and semi-mature trees present within the works areas. Any trees retained should be adequately protected during construction phase to promote their health and longevity. Areas which would be temporarily affected by construction activities (i.e. slope works) should be reinstated after completing the construction works.</li> <li>Hoarding or fencing should be erected around the works areas during construction phase to restrict access to natural habitats adjacent to works areas by site workers.</li> </ul>	All works areas	CEDD/Contractor	✓	✓			EIAO-TM
9.13.9-9.13.12	<p>Measures to Minimise Disturbance from Construction Activities</p> <ul style="list-style-type: none"> <li>Construction dust should be suppressed to avoid and minimize the dust covering leaves of plants that would affect their photosynthesis, and thus their health and growth: <ul style="list-style-type: none"> <li>Regular spraying of haul roads.</li> <li>Proper storage of construction materials.</li> <li>Covering trucks or transporting wastes in enclosed containers to minimize windblown litter and dust during transportation of waste.</li> </ul> </li> <li>Noise impact during construction phase should be avoided and minimized to reduce the disturbance to the habitats adjacent to the works areas: <ul style="list-style-type: none"> <li>Machines and plant (e.g. trucks) that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum.</li> <li>Machines and plants known to emit strong directional noise</li> </ul> </li> </ul>	All works areas	CEDD/Contractor		✓			EIAO-TM

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>should, wherever possible, be orientated so that the noise is directed away from the nearby habitats.</p> <ul style="list-style-type: none"> <li>- Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site construction activities.</li> <li>- Using Quiet Mechanical Plant (QMP) to limit noise emissions at source.</li> <li>- QMP and other machines and plants (e.g. air compressors, concrete pumps) should be covered by noise enclosure to further reduce noise impact.</li> </ul> <ul style="list-style-type: none"> <li>• Through night-time lighting control during construction phase, glare disturbance to wildlife would be controlled.</li> </ul>							
9.13.13	<p>Measures to Minimise Pollution to Watercourses</p> <ul style="list-style-type: none"> <li>• Good site practices should be adopted to avoid any pollution from entering the watercourses. Practices to minimize surface runoff and to reduce suspended solid levels should be undertaken.</li> <li>- Drainage arrangements should include sediment traps to collect and control construction run-off.</li> <li>- All works and storage area should be restricted to the site boundary.</li> <li>- General refuse and construction wastes should be collected and disposed of in a timely and appropriate manner.</li> <li>- Regular check of the construction boundary to avoid unmitigated impacts imposed on nearby watercourse.</li> </ul>	All works areas	CEDD/Contractor		✓			EIAO-TM
<b>Ecological Impact (Terrestrial) (Operational Phase)</b>								
9.13.14	<p>Measures to Minimize Impacts from Noise Barriers</p> <ul style="list-style-type: none"> <li>• During the operational phase, the road networks and associated noise barriers may result in bird collision and mortality. Mitigation measures such as use of tinted materials and superimposing dark patterns or strips on the barrier, as per EPD / Highways Department requirements would be employed to minimise incidents</li> </ul>	All works areas	CEDD/Contractor			✓		EIAO-TM

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	of mortality from collision.							
<b>Landscape and Visual (Construction Phase)</b>								
10.10.4 (Table 10.9)	All existing trees to be retained shall be carefully protected during construction.	All works areas	CEDD/Contractor	✓	✓			DEVB TC (W) No.10/2013
10.10.4 (Table 10.9)	Tree Transplantation  Detailed transplanting proposal will be submitted to relevant government departments for approval in accordance with ETWB TCW No. 29/2004, <b>DEVB TC (W) No.7/2015</b> and “ <b>Guidelines on Tree Transplanting</b> ”, <b>GLTMS of DEVB.</b>	All works areas	CEDD/Contractor	✓	✓			ETWB TCW No. 29/2004 DEVB TC (W) No.7/2015 Guidelines on Tree Transplanting, GLTMS of DEVB
10.10.4 (Table 10.9)	Erection of decorative screen hoarding for reducing visual impacts	All works areas	CEDD/Contractor		✓			EIAO-TM
10.10.4 (Table 10.9)	Measures to avoid / minimize impacts to flora species of conservation importance.	All works areas	CEDD/Contractor	✓	✓			EIAO-TM
<b>Landscape and Visual (Operational Phase)</b>								
10.10.4 (Table 10.10)	Compensatory tree planting for loss of existing trees (Compensation for loss of road side amenity )	All works areas	Design and Construction Stage - CEDD Operational Stage – HyD/LCSD	✓	✓	✓		DEVB TC (W) No.7/2015 GEO publication No. 1/2011
10.10.4 (Table 10.10)	Compensatory woodland planting	All works areas	Design and Construction Stage - CEDD Operational Stage – HyD/ArchSD	✓	✓	✓		DEVB TC (W) No.7/2015 GEO publication No. 1/2011

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
10.10.4 (Table 10.10)	Compensatory shrub mix planting	All works areas	Design and Construction Stage - CEDD Operational Stage – HyD	✓	✓	✓		DEVB TC (W) No.7/2015 GEO publication No. 1/2011
10.10.4 (Table 10.10)	Hydro-seeding planting with shrub seed mix	All works areas	Design and Construction Stage - CEDD Operational Stage – HyD	✓	✓	✓		DEVB TC (W) No.7/2015 GEO publication No. 1/2011
10.10.4 (Table 10.10)	Tall buffer advance screen tree / shrub / climber planting	All works areas	Design and Construction Stage - CEDD Operational Stage – HyD	✓	✓	✓		DEVB TC (W) No.7/2015 GEO publication No. 1/2011
10.10.4 (Table 10.10)	Planting of road verges, central divider and around structures	All works areas	Design and Construction Stage - CEDD Operational Stage – HyD, LCSD	✓	✓	✓		ETWB(W) No. 2/2004 Subject to ACABAS approval
10.10.4 (Table 10.10)	Reinstate modified watercourse	All works areas	Design and Construction Stage - CEDD Operational Stage - DSD	✓	✓	✓		EIAO-TM
10.10.4 (Table 10.10)	Provision of visually pleasing aesthetic treatment on noise barriers ( with climbers provided if space available) and enclosures	All works areas	Design and Construction Stage - CEDD Operational Stage - HyD	✓	✓	✓		ETWB(W) No. 2/2004 Subject to ACABAS approval
10.10.4 (Table 10.10)	Hard Landscape Treatment Carriageway, Structures and Roadside Furniture (for example, pleasing aesthetic finishing of retaining wall)	All works areas	Design and Construction Stage - CEDD	✓	✓	✓		ETWB(W) No. 10/2005 Subject to

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
			Operational Stage – HyD/LCSD/ArchSD					ACABAS approval
10.10.4 (Table 10.10)	Planting of toe planters for slope enhancement	All works areas	Design and Construction Stage - CEDD Operational Stage – LCSD	✓	✓	✓		EIAO-TM GEO publication No. 1/2011
10.10.4 (Table 10.10)	Planting of berm planters/ planting strips for slope enhancement	All works areas	Design and Construction Stage - CEDD Operational Stage – HyD	✓	✓	✓		EIAO-TM GEO publication No. 1/2011
<b>Landfill Gas Hazard (Construction Phase)</b>								
11.9.2 - 11.9.4	<ul style="list-style-type: none"> <li>Contractors shall note the possible presence of landfill gas in the ground (even if it is unlikely) and shall take this into account in the design, construction of the proposed works.</li> <li>A Safety Officer or an appropriately qualified person, trained in the use of gas detection equipment, landfill gas related hazards and the appropriate actions to take in the event of adverse circumstances, shall be present on site throughout the works, in particular, when works are undertaken below ground.</li> <li>The contractor shall take cognizance of the presence of surface water and leachate management system and landfill gas management systems near the proposed works area. The contractor shall take all reasonable care to avoid any damage, loss, injury, interruption or impairment of the integrity of the landfill facilities within the works limits, storage area and across road area. The contractor shall also liaise and seek EPD and their landfill contractor – Hong Kong Landfill Restoration Group Limited (HKLRG) agreement on site arrangement before carrying out the proposed work.</li> </ul>	Works areas within landfill consultation zones	CEDD/Contractor		✓	✓		EPD's Landfill Gas Hazard Assessment Guidance Note
11.9.5 - 11.9.11	<u>Safety Measures</u> <ul style="list-style-type: none"> <li>The contractor shall be aware of, and inform all workers accordingly, that methane and carbon dioxide is always likely to be</li> </ul>	Works areas within landfill consultation zones	CEDD/Contractor		✓			EPD's Landfill Gas Hazard Assessment



EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>present in the soil voids.</p> <ul style="list-style-type: none"> <li>All personnel working on site and all visitors to the site be informed of the nearby landfill site and the possibility of landfill gas in the vicinity of the proposed works area. Safety warning notices shall be posted.</li> <li>No worker shall be allowed to work alone at any time inside the trenches or joint bays or near to any excavation. At least one other worker shall be available to assist in a rescue in an emergency case.</li> <li>Smoking and naked flames shall be strictly prohibited within the site or confined space if any. 'No Smoking' and 'No Naked Flame' notices shall be posted prominently at the site entrance and other conspicuous locations.</li> <li>All electrical equipment, such as motors and extension cords, shall be intrinsically safe.</li> <li>Adequate safety equipment shall be available at all times. This includes but is not limited to fire extinguishing equipment, breathing apparatus and personal protective equipment.</li> <li>In the event of working inside a confined space is required, sufficient approved resuscitation equipment, breathing apparatus and safety torches shall be available. Persons involved in or supervising such work shall be trained and practiced for the use of such equipment. A permit-to-work system for entry into confined space shall be established by an approved qualified person and consistently enforced. All relevant Ordinances, Legislations, Guidelines and Codes of Practice pertaining to work in confined space must be strictly adhered to.</li> </ul>							<p>Guidance Note</p> <p>Labour Department's Code of Practice for Safety and Health at Work in Confined Space</p>
11.9.12-11.9.16	<p><u>Monitoring</u></p> <ul style="list-style-type: none"> <li>The works area shall be monitored periodically during construction for the presence of methane, carbon dioxide and oxygen using gas detection equipment. The gas detection equipment shall be an intrinsically safe portable instrument, appropriately calibrated and capable of measuring the following gases in the ranges indicated below:</li> </ul> <p>– Methane                      0 – 100% LEL and 0 – 100% v/v;</p>	Works areas within landfill consultation zones	CEDD/Contractor		✓			EPD's Landfill Gas Hazard Assessment Guidance Note

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<ul style="list-style-type: none"> <li>– Carbon dioxide 0 – 100%; and</li> <li>– Oxygen 0 – 21%.</li> <li>• During construction, monitoring of excavations shall be undertaken as follows:</li> <li>• For excavation deeper than 1 m, measurements shall be made: <ul style="list-style-type: none"> <li>– At the ground surface before excavation commences;</li> <li>– Immediately before any worker enters an excavation;</li> <li>– At the beginning of each working day for the entire period the excavation remains open; and</li> <li>– Periodically through the working day whilst workers are in the excavation.</li> </ul> </li> <li>• For excavation between 300 mm and 1 m deep, measurements shall be made: <ul style="list-style-type: none"> <li>– Directly after the excavation has been completed; and</li> <li>– Periodically whilst the excavation remains open.</li> </ul> </li> <li>• For excavation less than 300 mm, monitoring may be omitted at the discretion of the Safety Officer or other appropriate qualified person.</li> <li>• The monitoring frequency and area to be monitored shall be set down prior to commencement of ground works either by the Safety Officer or by an appropriately qualified person.</li> <li>• Monitoring should be undertaken by the Safety Officer or by an appropriately qualified person. The monitoring results shall be recorded and kept on site and shall be readily available at all times for inspection by the relevant authority.</li> <li>• Depending upon the results of measurements, actions will vary. Actions shall be set down by the Safety Officer or other appropriately qualified person prior to commencement of occupancy of the proposed works area.</li> </ul>							
<b>Landfill Gas Hazard (Operational Phase)</b>								

EIA Ref.	Recommended Mitigation Measures	Location of the Measures	Implementation Agent	Implementation Stage <sup>(1)</sup>				Relevant Legislation and Guidelines
				Des	C	O	Dec	
11.10.2 – 11.10.3	<ul style="list-style-type: none"> <li>The presence of landfill gas should be assumed at all times by maintenance workers.</li> <li>All maintenance workers inspecting any manhole should be fully trained in the issue of landfill gas hazard.</li> <li>Any manhole which is large enough to permit to access to personnel should be subject to safe entry procedures.</li> <li>Working in confined spaces is controlled by the Factories and Industrial Undertakings (Confined Spaces) Regulations of the Factories and Industrial Undertakings Ordinance. Following the Code of Practice on Safety and Health at Work in Confined Spaces (Labour Department, Hong Kong) maintains compliance with the above regulations.</li> <li>A strictly regulated “work permit procedure” should be implemented and the relevant safety procedures must be rigidly followed.</li> <li>Adequate communication with maintenance staff should be maintained with respect to landfill gas hazard.</li> <li>Utility companies should undertake a landfill gas surveillance exercise at the utility manholes/inspection chambers.</li> <li>Undertaken using an intrinsically safe portable instrument, appropriately calibrated and capable of measuring the following gases in the ranges indicated: <ul style="list-style-type: none"> <li>– Methane 0 – 100% LEL and 0 – 100% v/v;</li> <li>– Carbon dioxide 0 – 100%; and</li> <li>– Oxygen 0 – 21%.</li> </ul> </li> <li>Undertaken for the duration of the site occupancy, or until such time that EPD agrees that surveillance is no longer required.</li> <li>Depending on the results of the measurements, actions required will vary and should be set down by appropriately qualified person.</li> </ul>	Works areas within landfill consultation zones	Maintenance contractor/Utility companies			✓		<p>EPD’s Landfill Gas Hazard Assessment Guidance Note</p> <p>Labour Department’s Code of Practice for Safety and Health at Work in Confined Space</p>

Note:

(1) Des = Design; C = Construction; O = Operation; Dec = Decommissioning



***Appendix 4.1***

***Action and Limit Level***

**Action and Limit Level**

***Action and Limit Level for Noise Monitoring***

Monitoring Station	Action Level	Limit Level (dB(A))		
		0700-1900 hrs on normal weekdays	0700-2300 hrs on holidays (including Sundays); and 1900-2300 hrs on all days <sup>2</sup>	2300-0700 hrs of all days <sup>2</sup>
NMC01	When one documented complaint is received	65 / 70 <sup>1</sup>	60 / 65 / 70 <sup>3</sup>	45 / 50 / 55 <sup>3</sup>
NMC02		75		
NMC03		75		
NMC04		75		
NMC05		75		

Remark 1: Limit level of NMC01 - Kei Shun Special School reduce to 65 dB (A) during examination periods if any.

Remark 2: Construction noise during restricted hours is under the control of Noise Control Ordinance Limit Level to be selected based on Area Sensitivity Rating.

Remark 3: Limit Level for restricted hour monitoring shall act as reference level only. Investigation would be conducted on CNP compliance if exceedance recorded during restricted hour noise monitoring period.

***Baseline Level for Noise Monitoring  
 (For reference and calculation of Construction Noise Levels (CNLs))***

Monitoring Station	Action Level	Baseline Level (dB(A))		
		0700-1900 hrs on normal weekdays	0700-2300 hrs on holidays (including Sundays); and 1900-2300 hrs on all days	2300-0700 hrs of all days
NMC01	When one documented complaint is received	69.3	69.0	66.6
NMC02		72.0	66.3	68.6
NMC03		78.2	77.9	73.8
NMC04		66.6	64.0	62.1
NMC05		61.8	59.8	57.9

All the Construction Noise Levels (CNLs) reported in this report were adjusted with the corresponding baseline level (i.e. Measured Leq – Baseline Leq = CNL), in order to facilitate the interpretation of the noise exceedance.

**Action and Limit Level for Air Quality Monitoring**

Monitoring Locations	1-hour TSP Level inµg/m3	
	Action Level	Limit Level
NCWBR_AMS-1	284.4	500.0
NCWBR_AMS-2	282.4	500.0
NCWBR_AMS-3	287.9	500.0
NCWBR_AMS-4	281.6	500.0
NCWBR_AMS-5	270.0	500.0
LTR_AMS-1	272.1	500.0
LTR_AMS-2	281.1	500.0
LTR_AMS-3	285.1	500.0

**Action and Limit Level for Water Monitoring**

Monitoring Station	Surface pH		Surface DO (mg/L)		Surface Turbidity (NTU)		Surface SS (mg/L)	
	Action Level	Limit Level	Action Level	Limit Level	Action Level	Limit Level	Action Level	Limit Level
E	-	-	-	-	-	-	-	-
F	Beyond the range of 6.6-8.4	Beyond the range of 6.5-8.5	5.8	5.5	24.4	32.7	17.0	23.8
H	-	-	-	-	-	-	-	-
I	Beyond the range of 6.6-8.4	Beyond the range of 6.5-8.5	5.5	5.4	206.9	214.2	172.8	201.4

**\*Remarks:**

The value of 1.0mg/L was taken as the value for measurement with suspended solid level of <1.0mg/L for Action and Limit level calculation.

It is recommended that upstream monitoring station (monitoring station E and H) would be taken as control reference for exceedance investigation only. Action and limit level would not be establish using the baseline data.



***Appendix 4.2***

***Copies of Calibration Certificates***

# Manufacturer Calibration Certificate

---

The following instrument has been tested and calibrated to the manufacturer specifications.  
The calibration is traceable in accordance with ISO/IEC 17025 covering all instrument functions.

- Device Type: **XL2 Audio and Acoustic Analyzer**
- Serial Number: **A2A-15269-E0**

- Certificate Issued: **19 February 2019**
- Certificate Number: **43515-A2A-15269-E0**
- Results: **PASSED**  
(for detailed report see next page)

---

Tested by: **M. Frick**

Signature:

Stamp:



**NTi Audio AG**  
Im alten Riet 102  
LI 9494 Schaan  
[www.nti-audio.com](http://www.nti-audio.com)



Calibration of: XL2 Audio and Acoustic Analyzer  
 Serial Number: A2A-15269-E0  
 Date: 19 February 2019

• Detailed Calibration Test Results:

	reference	actual	unit	actual error	XL2 tolerance	calibration uncertainty <sup>2</sup>
RMS Level @ 1kHz, XLR Input	0.1	<b>0.100</b>	V	≤0.1%	±0.5%	±0.10%
	1	<b>0.999</b>	V	-0.1%	±0.5%	±0.09%
	10	<b>9.978</b>	V	-0.2%	±0.5%	±0.09%
Flatness, XLR Input <sup>1</sup>	20 Hz	<b>0.995</b>	V	-0.5%	±1.1%	±0.09%
	20 kHz	<b>1.003</b>	V	0.3%	±1.1%	±0.09%
Frequency	1000	<b>999.99</b>	Hz	≤0.003%	±0.003%	±0.01%
Residual Noise	XLR	<b>&lt; 2 uV</b>			<2 uV	±0.50%
THD+N @ 0 dBu, 1 kHz, XLR Input		<b>-100.4</b>	dB		typ. -100 dB	±0.50%

- Test Conditions: Temperature: **23.4** °C  
 Relative Humidity: **32** %

• Calibration Equipment Used:

- Agilent Multimeter, Typ 34401A, Serial No. MY 5300 4607  
 Last calibration: 15.08.2018, Next calibration: 15.08.2019  
 Calibrated by ELCAL to the national standards maintained at Swiss Federal Office of Metrology. SCS 0002

- FX100 Audio Analyzer, Serial No. 10408  
 Last Calibration: 27.04.2018, Next Calibration: 27.04.2019  
 Manufacturer calibration based on Agilent 34410, Serial No. MY47014254,  
 Last Calibration: 11.05.2018, Next Calibration: 11.05.2019  
 which is calibrated by ELCAL to national standards maintained at Swiss Federal Office of Metrology. SCS 002

<sup>1</sup> The specified tolerance +/-0.1 dB @ 1V = +/- 1.1%

<sup>2</sup> The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with the regulations of the GUM.



## CERTIFICATE OF CALIBRATION

Certificate No.: 19CA0529 01 Page 1 of 2

### Item tested

Description:	Sound Level Meter (Type 1)	Microphone	Preamp
Manufacturer:	Larson Davis	PCB	PCB
Type/Model No.:	LxT1	377B02	PRMLxT1L
Serial/Equipment No.:	0005098	173736	042838
Adaptors used:	-	-	-

### Item submitted by

Customer Name: Lam Environmental Services Limited  
Address of Customer: -  
Request No.: -  
Date of receipt: 29-May-2019

Date of test: 30-May-2019

### Reference equipment used in the calibration

Description:	Model:	Serial No.	Expiry Date:	Traceable to:
Multi function sound calibrator	B&K 4226	2288444	23-Aug-2019	CIGISMEC
Signal generator	DS 360	61227	26-Dec-2019	CEPREI

### Ambient conditions

Temperature:  $22 \pm 1$  °C  
Relative humidity:  $55 \pm 10$  %  
Air pressure:  $1005 \pm 5$  hPa

### Test specifications

- The Sound Level Meter has been calibrated in accordance with the requirements as specified in BS 7580: Part 1: 1997 and the lab calibration procedure SMTP004-CA-152.
- The electrical tests were performed using an electrical signal substituted for the microphone which was removed and replaced by an equivalent capacitance within a tolerance of  $\pm 20\%$ .
- The acoustic calibration was performed using an B&K 4226 sound calibrator and corrections was applied for the difference between the free-field and pressure responsiveness of the Sound Level Meter.


### Test results

This is to certify that the Sound Level Meter conforms to BS 7580: Part 1: 1997 for the conditions under which the test was performed.

Details of the performed measurements are presented on page 2 of this certificate.

Actual Measurement data are documented on worksheets.


Approved Signatory:



Feng Junqi

Date: 31-May-2019

Company Chop:



**Comments:** The results reported in this certificate refer to the condition of the instrument on the date of calibration and carry no implication regarding the long-term stability of the instrument.



## CERTIFICATE OF CALIBRATION

(Continuation Page)

Certificate No.: 19CA0529 01 Page 2 of 2

### 1, Electrical Tests

The electrical tests were performed using an equivalent capacitance substituted for the microphone. The results are given in below with test status and the estimated uncertainties. The "Pass" means the result of the test is inside the tolerances stated in the test specifications. The "-" means the result of test is outside these tolerances.

Test:	Subtest:	Status:	Expanded Uncertainty (dB)	Coverage Factor
Self-generated noise	A	Pass	0.3	2.1
	C	Pass	0.8	
	Lin	Pass	1.6	
Linearity range for Leq	At reference range, Step 5 dB at 4 kHz	Pass	0.3	2.2
	Reference SPL on all other ranges	Pass	0.3	
	2 dB below upper limit of each range	Pass	0.3	
	2 dB above lower limit of each range	Pass	0.3	
	At reference range, Step 5 dB at 4 kHz	Pass	0.3	
Linearity range for SPL	A	Pass	0.3	
	C	Pass	0.3	
	Lin	Pass	0.3	
Time weightings	Single Burst Fast	Pass	0.3	
	Single Burst Slow	Pass	0.3	
Peak response	Single 100µs rectangular pulse	Pass	0.3	
R.M.S. accuracy	Crest factor of 3	Pass	0.3	
Time weighting I	Single burst 5 ms at 2000 Hz	Pass	0.3	
	Repeated at frequency of 100 Hz	Pass	0.3	
Time averaging	1 ms burst duty factor 1/10 <sup>3</sup> at 4kHz	Pass	0.3	
	1 ms burst duty factor 1/10 <sup>4</sup> at 4kHz	Pass	0.3	
Pulse range	Single burst 10 ms at 4 kHz	Pass	0.4	
Sound exposure level	Single burst 10 ms at 4 kHz	Pass	0.4	
Overload indication	SPL	Pass	0.3	
	Leq	Pass	0.4	

### 2, Acoustic tests

The complete sound level meter was calibrated on the reference range using a B&K 4226 acoustic calibrator with 1000Hz and SPL 94 dB. The sensitivity of the sound level meter was adjusted. The test result at 125 Hz and 8000 Hz are given in below with test status and the estimated uncertainties.

Test:	Subtest	Status	Expanded Uncertainty (dB)	Coverage Factor
Acoustic response	Weighting A at 125 Hz	Pass	0.3	
	Weighting A at 8000 Hz	Pass	0.5	

### 3, Response to associated sound calibrator

N/A

The expanded uncertainties have been calculated in accordance with the ISO Publication "Guide to the expression of uncertainty in measurement", and gives an interval estimated to have a level of confidence of 95%. A coverage factor of 2 is assumed unless explicitly stated.

Calibrated by:

Date: 30-May-2019

Fung Chi Yip

- End -

Checked by:

Date: 31-May-2019

Shek Kwong Tat

The standard(s) and equipment used in the calibration are traceable to national or international recognised standards and are calibrated on a schedule to maintain the required accuracy level.



Test Data for Sound Level Meter

Page 1 of 5

Sound level meter type:	LxT1	Serial No.	0005098	Date	30-May-2019
Microphone type:	377B02	Serial No.	173736		
Preamp type:	PRMLxT1L	Serial No.	042838	Report:	19CA0529 01

### SELF GENERATED NOISE TEST

The noise test is performed in the most sensitive range of the SLM with the microphone replaced by an equivalent impedance.

Noise level in A weighting	11.4	dB
Noise level in C weighting	16.1	dB
Noise level in Lin	22.2	dB

### LINEARITY TEST

The linearity is tested relative to the reference sound pressure level using a continuous sinusoidal signal of frequency 4 kHz. The measurement is made on the reference range for indications at 5 dB intervals starting from the 94 dB reference sound pressure level. And until within 5 dB of the upper and lower limits of the reference range, the measurements shall be made at 1 dB intervals. (SLM set to LEQ/SPL)

Reference/Expected level	Actual level		Tolerance	Deviation	
	non-integrated	integrated		non-integrated	integrated
dB	dB	dB	+/- dB	dB	dB
94.0	94.0	94.0	0.7	0.0	0.0
99.0	99.0	99.0	0.7	0.0	0.0
104.0	104.0	104.0	0.7	0.0	0.0
109.0	109.0	109.0	0.7	0.0	0.0
114.0	114.0	114.0	0.7	0.0	0.0
115.0	115.0	115.0	0.7	0.0	0.0
116.0	116.0	116.0	0.7	0.0	0.0
117.0	117.0	117.0	0.7	0.0	0.0
118.0	118.0	118.0	0.7	0.0	0.0
119.0	119.0	119.0	0.7	0.0	0.0
120.0	120.0	120.0	0.7	0.0	0.0
89.0	89.0	89.0	0.7	0.0	0.0
84.0	84.0	84.0	0.7	0.0	0.0
79.0	79.0	79.0	0.7	0.0	0.0
74.0	74.0	74.0	0.7	0.0	0.0
69.0	69.0	69.0	0.7	0.0	0.0
64.0	64.0	64.0	0.7	0.0	0.0
59.0	59.0	59.0	0.7	0.0	0.0
54.0	54.0	54.0	0.7	0.0	0.0
49.0	49.0	49.0	0.7	0.0	0.0
44.0	44.0	44.0	0.7	0.0	0.0
39.0	38.9	38.9	0.7	-0.1	-0.1
34.0	34.0	34.0	0.7	0.0	0.0
33.0	32.9	32.9	0.7	-0.1	-0.1



Test Data for Sound Level Meter

Sound level meter type: LxT1 Serial No. 0005098 Date 30-May-2019  
 Microphone type: 377B02 Serial No. 173736  
 Preamp type: PRMLxT1L Serial No. 042838 Report: 19CA0529 01

32.0	31.9	31.9	0.7	-0.1	-0.1
31.0	31.0	31.0	0.7	0.0	0.0
30.0	30.0	30.0	0.7	0.0	0.0

Measurements for an indication of the reference SPL on all other ranges which include it

Other ranges	Expected level	Actual level	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
20-120	94.0	94.0	0.7	0.0

Measurements on all level ranges for indications 2 dB below the upper limit and 2 dB above the lower limit

Ranges	Reference/Expected level	Actual level	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
20-120	30.0	30.0	0.7	0.0
	118.0	118.0	0.7	0.0

**FREQUENCY WEIGHTING TEST**

The frequency response of the weighting networks are tested at octave intervals over the frequency ranges 31.5 Hz to 12500 Hz. The signal level at 1000 Hz is set to give an indication of the reference SPL.

Frequency weighting A:

Frequency	Ref. level	Expected level	Actual level	Tolerance(dB)		Deviation
				+	-	
Hz	dB	dB	dB			dB
1000.0	94.0	94.0	94.0	0.0	0.0	0.0
31.6	94.0	54.6	54.6	1.5	1.5	0.0
63.1	94.0	67.8	67.8	1.5	1.5	0.0
125.9	94.0	77.9	77.9	1.0	1.0	0.0
251.2	94.0	85.4	85.4	1.0	1.0	0.0
501.2	94.0	90.8	90.8	1.0	1.0	0.0
1995.0	94.0	95.2	95.2	1.0	1.0	0.0
3981.0	94.0	95.0	95.0	1.0	1.0	0.0
7943.0	94.0	92.9	92.9	1.5	3.0	0.0
12590.0	94.0	89.7	89.7	3.0	6.0	0.0

Frequency weighting C:

Frequency	Ref. level	Expected level	Actual level	Tolerance(dB)		Deviation
				+	-	
Hz	dB	dB	dB			dB
1000.0	94.0	94.0	94.0	0.0	0.0	0.0
31.6	94.0	91.0	91.0	1.5	1.5	0.0
63.1	94.0	93.2	93.2	1.5	1.5	0.0
125.9	94.0	93.8	93.8	1.0	1.0	0.0
251.2	94.0	94.0	94.0	1.0	1.0	0.0
501.2	94.0	94.0	94.0	1.0	1.0	0.0



Test Data for Sound Level Meter

Sound level meter type:	LxT1	Serial No.	0005098	Date	30-May-2019
Microphone type:	377B02	Serial No.	173736		
Preamp type:	PRMLxT1L	Serial No.	042838	Report:	19CA0529 01

1995.0	94.0	93.8	93.9	1.0	1.0	0.1
3981.0	94.0	93.2	93.2	1.0	1.0	0.0
7943.0	94.0	91.0	91.0	1.5	3.0	0.0
12590.0	94.0	87.8	87.8	3.0	6.0	0.0

Frequency weighting Lin:

Frequency Hz	Ref. level dB	Expected level dB	Actual level dB	Tolerance(dB)		Deviation dB
				+	-	
1000.0	94.0	94.0	94.0	0.0	0.0	0.0
31.6	94.0	94.0	94.0	1.5	1.5	0.0
63.1	94.0	94.0	94.0	1.5	1.5	0.0
125.9	94.0	94.0	94.0	1.0	1.0	0.0
251.2	94.0	94.0	94.0	1.0	1.0	0.0
501.2	94.0	94.0	94.0	1.0	1.0	0.0
1995.0	94.0	94.0	94.0	1.0	1.0	0.0
3981.0	94.0	94.0	94.0	1.0	1.0	0.0
7943.0	94.0	94.0	94.1	1.5	3.0	0.1
12590.0	94.0	94.0	94.0	3.0	6.0	0.0

**TIME WEIGHTING FAST TEST**

Time weighting F is tested on the reference range with a single sinusoidal burst of duration 200 ms at a frequency 2000 Hz and an amplitude which produces an indication 4 dB below the upper limit of the primary indicator range when the signal is continuous. (Weight A, Maximum hold)

Ref. level dB	Expected level dB	Actual level dB	Tolerance(dB)		Deviation dB
			+	-	
116.0	115.0	115.0	1.0	1.0	0.0

**TIME WEIGHTING SLOW TEST**

Time weighting S is tested on the reference range with a single sinusoidal burst of duration 500 ms at a frequency 2000 Hz and an amplitude which produces an indication 4 dB below the upper limit of the primary indicator range when the signal is continuous. (Weight A, Maximum hold)

Ref. level dB	Expected level dB	Actual level dB	Tolerance(dB)		Deviation dB
			+	-	
116.0	111.9	111.9	1.0	1.0	0.0

**PEAK RESPONSE TEST**

The onset time of the peak detector is tested on the reference range by comparing the response to a 100 us rectangular test pulse with the response to a 10 ms reference pulse of the same amplitude. The amplitude of the 10 ms reference pulse is such as to produce an indication 1 dB below the upper limit of the primary indicator range.

Positive polarities: (Weighting Z, set the generator signal to single, Lzpeak)

Ref. level dB	Response to 10 ms dB	Response to 100 us dB	Tolerance +/- dB	Deviation dB





Test Data for Sound Level Meter

Page 4 of 5

Sound level meter type: LxT1 Serial No. 0005098 Date 30-May-2019  
 Microphone type: 377B02 Serial No. 173736  
 Preamp type: PRMLxT1L Serial No. 042838 Report: 19CA0529 01

Negative polarities:

Ref. level	Response to 10 ms	Response to 100 us	Tolerance	Deviation
dB	dB	dB	+/- dB	dB
119.0	119.0	119.5	2.0	0.5

**RMS ACCURACY TEST**

The RMS detector accuracy is tested on the reference range for a crest factor of 3.

Test frequency: 2000 Hz  
 Amplitude: 2 dB below the upper limit of the primary indicator range.  
 Burst repetition frequency: 40 Hz  
 Tone burst signal: 11 cycles of a sine wave of frequency 2000 Hz. (Set to INT)

Time weighting	Ref. Level	Expected level	Tone burst signal	Tolerance	Deviation
	dB	dB	indication(dB)	+/- dB	dB
Slow	118.0+6.6	118.0	118.0	0.5	0.0

**TIME WEIGHTING IMPULSE TEST**

Time weighting I is tested on the reference range (Set the SLM to LAImax)

Test frequency: 2000 Hz  
 Amplitude: The upper limit of the primary indicator range.

Single sinusoidal burst of duration 5 ms:

Ref. Level	Single burst indication		Tolerance	Deviation
dB	Expected (dB)	Actual (dB)	+/- dB	dB
120.0	111.2	111.1	2.0	-0.1

Repeated at 100 Hz

Ref. Level	Repeated burst indication		Tolerance	Deviation
dB	Expected (dB)	Actual (dB)	+/- dB	dB
120.0	117.3	117.2	1.0	-0.1

**TIME AVERAGING TEST**

This test compares the SLM reading for continuous sine signals with readings obtained from a sine tone burst sequence having the same RMS level. The test level is 30 dB below the upper limit of the linearity range and repeated for Type 1 SLM with 40 dB below the upper limit of the linearity.

Frequency of tone burst: 4000 Hz

Duration of tone burst: 1 ms

Repetition Time	Level of tone burst	Expected Leq	Actual Leq	Tolerance	Deviation	Remarks
msec	dB	dB	dB	+/- dB	dB	
1000	90.0	90.0	89.9	1.0	-0.1	60s integ.
10000	80.0	80.0	79.9	1.0	-0.1	6min. integ.

**PULSE RANGE AND SOUND EXPOSURE LEVEL TEST**

The test tone burst signal is superimposed on a baseline signal corresponding to the lower limit of reference range

Test frequency: 4000 Hz

Integration time: 10 sec



Test Data for Sound Level Meter

Page 5 of 5

Sound level meter type: LxT1 Serial No. 0005098 Date 30-May-2019  
Microphone type: 377B02 Serial No. 173736  
Preamp type: PRMLxT1L Serial No. 042838 Report: 19CA0529 01

The integrating sound level meter set to Leq:

Duration	Rms level of	Expected	Actual	Tolerance	Deviation
msec	tone burst (dB)	dB	dB	+/- dB	dB
10	88.0	58.0	58.0	1.7	0.0

The integrating sound level meter set to SEL:

Duration	Rms level of	Expected	Actual	Tolerance	Deviation
msec	tone burst (dB)	dB	dB	+/- dB	dB
10.0	88.0	68.0	68.0	1.7	0.0

OVERLOAD INDICATION TEST

For SLM capable of operating in a non-integrating mode.

Test frequency: 2000 Hz  
Amplitude: 2 dB below the upper limit of the primary indicator range.  
Burst repetition frequency: 40 Hz  
Tone burst signal: 11 cycles of a sine wave of frequency 2000 Hz.

Level	Level reduced by	Further reduced	Difference	Tolerance	Deviation
at overload (dB)	1 dB	3 dB	dB	dB	dB
116.0	115.0	112.0	3.0	1.0	0.0

For integrating SLM, with the instrument indicating Leq.

For integrating SLM, with the instrument indicating Leq and set to the reference range. The test signal as following:  
The test tone burst signal is superimposed on a baseline signal corresponding to the lower limit of reference range  
Test frequency: 4000 Hz  
Integration time: 10 sec  
Single burst duration: 1 msec

Rms level	Level reduced by	Expected level	Actual level	Tolerance	Deviation
at overload (dB)	1 dB	dB	dB	dB	dB
122.6	121.6	81.6	81.6	2.2	0.0

ACOUSTIC TEST

The acoustic test of the complete SLM is tested at the frequency 125 Hz and 8000 Hz using a B&K type 4226 Multifunction Acoustic Calibrator. The test is performed in A weighting.

Frequency	Expected level	Actual level		Tolerance (dB)	Deviation
		Measured (dB)			
Hz	dB			+ -	dB
1000	94.0	94.0		0.0 0.0	0.0
125	77.9	77.9		1.0 1.0	0.0
8000	92.9	91.7		1.5 3.0	-1.2

-----END-----





## CERTIFICATE OF CALIBRATION

Certificate No.: 18CA1023 02

Page: 1 of 2

### Item tested

Description: Acoustical Calibrator (Class 1)  
Manufacturer: Larson Davis  
Type/Model No.: CAL200  
Serial/Equipment No.: 13437  
Adaptors used: -

### Item submitted by

Customer: Lam Geotechnics Ltd.  
Address of Customer: -  
Request No.: -  
Date of receipt: 23-Oct-2018

Date of test: 24-Oct-2018

### Reference equipment used in the calibration

Description:	Model:	Serial No.	Expiry Date:	Traceable to:
Lab standard microphone	B&K 4180	2412857	20-Apr-2019	SCL
Preamplifier	B&K 2673	2239857	27-Apr-2019	CEPREI
Measuring amplifier	B&K 2610	2346941	08-May-2019	CEPREI
Signal generator	DS 360	33873	24-Apr-2019	CEPREI
Digital multi-meter	34401A	US36087050	23-Apr-2019	CEPREI
Audio analyzer	8903B	GB41300350	23-Apr-2019	CEPREI
Universal counter	53132A	MY40003662	24-Apr-2019	CEPREI

### Ambient conditions

Temperature:  $20 \pm 1$  °C  
Relative humidity:  $50 \pm 10$  %  
Air pressure:  $1005 \pm 5$  hPa

### Test specifications

- The Sound Calibrator has been calibrated in accordance with the requirements as specified in IEC 60942 1997 Annex B and the lab calibration procedure SMTP004-CA-156.
- The calibrator was tested with its axis vertical facing downwards at the specific frequency using insert voltage technique.
- The results are rounded to the nearest 0.01 dB and 0.1 Hz and have not been corrected for variations from a reference pressure of 1013.25 hectoPascals as the maker's information indicates that the instrument is insensitive to pressure changes.

### Test results

This is to certify that the sound calibrator conforms to the requirements of annex B of IEC 60942: 1997 for the conditions under which the test was performed. This does not imply that the sound calibrator meets IEC 60942 under any other conditions.

Details of the performed measurements are presented on page 2 of this certificate.

Approved Signatory:

Feng Junqi

Date: 24-Oct-2018

Company Chop:



Comments: The results reported in this certificate refer to the condition of the instrument on the date of calibration and carry no implication regarding the long-term stability of the instrument.



## CERTIFICATE OF CALIBRATION

(Continuation Page)

Certificate No.: 18CA1023 02

Page: 2 of 2

### 1, Measured Sound Pressure Level

The output Sound Pressure Level in the calibrator head was measured at the setting and frequency shown using a calibrated laboratory standard microphone and insert voltage technique. The results are given in below with the estimated uncertainties.

Frequency Shown Hz	Output Sound Pressure Level Setting dB	Measured Output Sound Pressure Level dB	(Output level in dB re 20 $\mu$ Pa)
			Estimated Expanded Uncertainty dB
1000	94.00	93.77	0.10

### 2, Sound Pressure Level Stability - Short Term Fluctuations

The Short Term Fluctuations was determined by measuring the maximum and minimum of the fast weighted DC output of the B&K 2610 measuring amplifier over a 20 second time interval as required in the standard. The Short Term Fluctuation was found to be:

At 1000 Hz **STF = 0.015 dB**

Estimated expanded uncertainty 0.005 dB

### 3, Actual Output Frequency

The determination of actual output frequency was made using a B&K 4180 microphone together with a B&K 2673 preamplifier connected to a B&K 2610 measuring amplifier. The AC output of the B&K 2610 was taken to an universal counter which was used to determine the frequency averaged over 20 second of operation as required by the standard. The actual output frequency at 1 KHz was:

At 1000 Hz **Actual Frequency = 1000.2 Hz**

Estimated expanded uncertainty 0.1 Hz Coverage factor  $k = 2.2$

### 4, Total Noise and Distortion

For the Total Noise and Distortion measurement, the unfiltered AC output of the B&K 2610 measuring amplifier was connected to an Agilent Type 8903 B distortion analyser. The TND result at 1 KHz was:

At 1000 Hz **TND = 0.5%**

Estimated expanded uncertainty 0.7 %

The expanded uncertainties have been calculated in accordance with the ISO Publication "Guide to the expression of uncertainty in measurement", and gives an interval estimated to have a level of confidence of 95%. A coverage factor of 2 is assumed unless explicitly stated.

Calibrated by:

Date:

Fung Chi Yip  
24-Oct-2018

- End -

Checked by:

Date:

Shek Kwong Tat  
24-Oct-2018

The standard(s) and equipment used in the calibration are traceable to national or international recognised standards and are calibrated on a schedule to maintain the required accuracy level.

# Calibration Certificate

Certificate Number 2018010851

**Customer:**

LAM Environmental Services Ltd

11/F Centre Point

181-185 Gloucester Road

Wanchai, , Hong Kong

**Model Number** CAL200

**Serial Number** 13098

**Test Results** Pass

**Initial Condition** Inoperable

**Description** Larson Davis CAL200 Acoustic Calibrator

**Procedure Number** D0001.8386

**Technician** Scott Montgomery

**Calibration Date** 29 Oct 2018

**Calibration Due**

**Temperature** 23 °C ± 0.3 °C

**Humidity** 34 %RH ± 3 %RH

**Static Pressure** 101.2 kPa ± 1 kPa

**Evaluation Method** The data is acquired by the insert voltage calibration method using the reference microphone's open circuit sensitivity. Data reported in dB re 20 µPa.

**Compliance Standards** Compliant to Manufacturer Specifications per D0001.8190 and the following standards:  
IEC 60942:2017 ANSI S1.40-2006

Issuing lab certifies that the instrument described above meets or exceeds all specifications as stated in the referenced procedure (unless otherwise noted). It has been calibrated using measurement standards traceable to the SI through the National Institute of Standards and Technology (NIST), or other national measurement institutes, and meets the requirements of ISO/IEC 17025:2005.

**Test points marked with a ‡ in the uncertainties column do not fall within this laboratory's scope of accreditation.**

The quality system is registered to ISO 9001:2008.

This calibration is a direct comparison of the unit under test to the listed reference standards and did not involve any sampling plans to complete. No allowance has been made for the instability of the test device due to use, time, etc. Such allowances would be made by the customer as needed.

The uncertainties were computed in accordance with the ISO Guide to the Expression of Uncertainty in Measurement (GUM). A coverage factor of approximately 2 sigma (k=2) has been applied to the standard uncertainty to express the expanded uncertainty at approximately 95% confidence level.

This report may not be reproduced, except in full, unless permission for the publication of an approved abstract is obtained in writing from the organization issuing this report.

## Standards Used

Description	Cal Date	Cal Due	Cal Standard
Agilent 34401A DMM	09/06/2018	09/06/2019	001021
Larson Davis Model 2900 Real Time Analyzer	04/10/2018	04/10/2019	001051
Microphone Calibration System	03/07/2018	03/07/2019	005446
1/2" Preamplifier	09/20/2018	09/20/2019	006506
Larson Davis 1/2" Preamplifier 7-pin LEMO	08/07/2018	08/07/2019	006507
1/2 inch Microphone - RI - 200V	05/10/2018	05/10/2019	006510
Pressure Transducer	07/18/2018	07/18/2019	007368

Larson Davis, a division of PCB Piezotronics, Inc  
1681 West 820 North  
Provo, UT 84601, United States  
716-684-0001



**LARSON DAVIS**  
A PCB PIEZOTRONICS DIV.



Portable Dust Meter Performance Check Record

Portable Dust Meter

Type : Particulate Monitor
Manufacturer : MET ONE INSTRUMENTS
Model Number : 831
Serial Number : R14332
Performance Check Date : 27-Feb-19, 14-Mar-19

Standard Equipment

Type : High Volume Sampler
Manufacturer : TISCH
Model Number : TE-5170
Equipment Number : HVS018
Last Calibration Date : 4-Feb-19


Portable Dust Meter Performance Check Results

Table with 6 columns: Trial no. in 1-hr period, Time, Mean Pressure (hPa), Mean Temp (°C), Concentration in ug/m³ (Standard equipment), Concentration in ug/m³ (Performance Check / Calibrated equipment). Rows include Zero Check and three trials.

\* Filter paper weighting was conducted by HOKLAS accredited laboratory.

Linear Regression of Y on X

Slope (K- factor) : 1.0000
Correlation Coefficient : 0.9936
Validity of Performance Check / Calibration Record : 13/3/2020

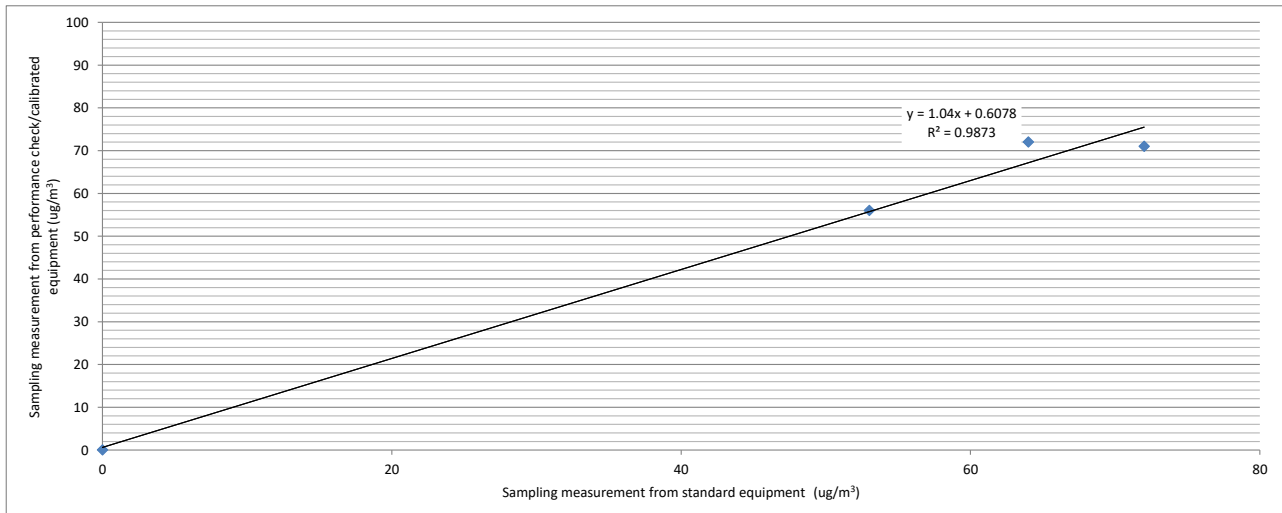

Operator: Henry Lau

Date: 14-Mar-19

Checked by: Chan Ka Chun

Date: 21-Mar-19


**REPORT OF EQUIPMENT PERFORMANCE CHECK / CALIBRATION**

**REPORT NO.** : HK1810828  
**PROJECT NAME** : PERFORMANCE CHECK / CALIBRATION OF DUST METER  
**DATE OF ISSUE** : 22/8/2018  
**CUSTOMER** : LAM ENVIRONMENTAL SERVICES LTD  
**ADDRESS** : 11/F, CENTRE POINT, 181-185 GLOUCESTER ROAD, WAN CHAI, HONG KONG

**REPORT NO.** : HK1810828  
**PROJECT ITEM NO.** : HK1810828-01  
**PERFORMANCE CHECK / CALIBRATED EQUIPMENT TYPE** : PARTICULATE MONITOR  
**MANUFACTURER** : MET ONE INSTRUMENTS  
**MODEL NO.** : BT 645  
**SERIAL NO.** : X19297  
**EQUIPMENT NO.** : ---  
**RECEIPT DATE** : 16/8/2018  
**PERFORMANCE CHECK / CALIBRATION DATE** : 17/8/2018

**PERFORMANCE CHECK / CALIBRATION Information**

CODE	Calibration Parameter	Method Procedure	Reference Method
Dust PC/CAL	Performance Check / Calibration of Dust Meter	CAL003	General Technical Requirements of Environmental Monitoring, Environmental Monitoring & Audit Guidelines for Development Projects in HK

- Notes :
1. This report shall not be reproduced, except in full, without prior approval from Pilot Testing Limited.
  2. Performance Check / Calibration result relates to performance check / calibration item(s) as received.

Approved Signatory

:

\_\_\_\_\_  
 Wong Po Yan Pauline  
 (Assistant Laboratory Manager)

Issue Date:

22/8/2018




**REPORT OF PERFORMANCE CHECK / CALIBRATION**

PROJECT NAME : PERFORMANCE CHECK / CALIBRATION OF DUST METER  
 DATE OF ISSUE : 22/8/2018  
 REPORT NO. : HK1810828

**PERFORMANCE CHECK / CALIBRATED EQUIPMENT**

TYPE : PARTICULATE MONITOR  
 MANUFACTURER : MET ONE INSTRUMENTS  
 MODEL NO. : BT 645  
 SERIAL NO. : X19297  
 EQUIPMENT NO. : ---  
 PERFORMANCE CHECK / CALIBRATION DATE : 17/8/2018

**STANDARD EQUIPMENT**


TYPE : HIGH VOLUME AIR SAMPLER  
 MANUFACTURER : TISCH  
 MODEL NO. : TE-5170  
 EQUIPMENT REF NO. : PTL\_HV002  
 LAST CALIBRATION DATE : 25/7/2018

**EQUIPMENT PERFORMANCE CHECK / CALIBRATION RESULTS:**

Trial no. in 1-hr period	Time	Mean Temp (°C)	Mean Pressure (hPa)	Concentration in ug/m <sup>3</sup> (Standard equipment) (Y - Axis)	Concentration in ug/m <sup>3</sup> (Performance Check / Calibrated equipment) (X - Axis)
Zero Check <sup>1</sup>	17/8/2018, 7:20:00 AM	28	1005	0	0
1	17/8/2018, 8:24:00 PM	28	1005	51	51
2	17/8/2018, 9:26:00 PM	28	1005	24	19
3	17/8/2018, 10:28:00 PM	28	1005	19	14

**Linear Regression of Y on X**

Slope (K- factor) : 1.0000  
 Correlation Coefficient : 0.9921  
 Validity of Performance Check / Calibration Record : 17/8/2019

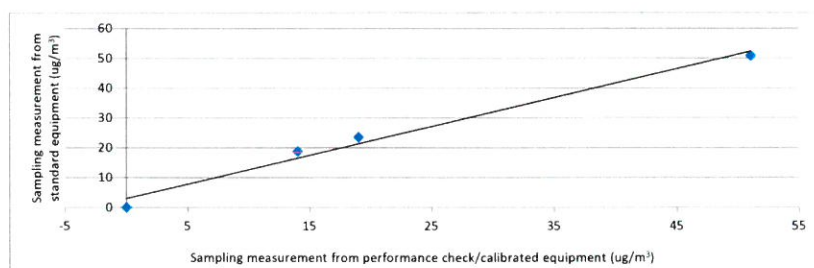

- Notes : 1. Zero check conducted as per CAL003 SOP and manufacturer's manual as appropriate.  
 2. This report shall not be reproduced, except in full, without prior approval from Pilot Testing Limited.  
 3. Performance Check / Calibration result relates to performance check / calibration item(s) as received.

Operator: Lau, Natalie Signature:  Date: 17/8/2018

Checked by: Wong Po Yan, Pauline Signature:  Date: 22/8/2018



Portable Dust Meter Performance Check Record

Portable Dust Meter

Type : Particulate Monitor
Manufacturer : MET ONE INSTRUMENTS
Model Number : BT-645
Serial Number : X19299
Performance Check Date : 10-Jan-19

Standard Equipment

Type : High Volume Sampler
Manufacturer : TISCH
Model Number : TE-5170
Equipment Number : HVS018
Last Calibration Date : 4-Dec-18


Portable Dust Meter Performance Check Results

Table with 6 columns: Trial no. in 1-hr period, Time, Mean Temp (°C), Mean Pressure (hPa), Concentration in ug/m³ (Standard equipment), Concentration in ug/m³ (Performance Check / Calibrated equipment). Rows include Zero Check and three trials.

\* Filter paper weighting was conducted by HOKLAS accredited laboratory.

Linear Regression of Y on X

Slope (K- factor) : 1.5000
Correlation Coefficient : 0.9995
Validity of Performance Check / Calibration Record : 10/1/2020

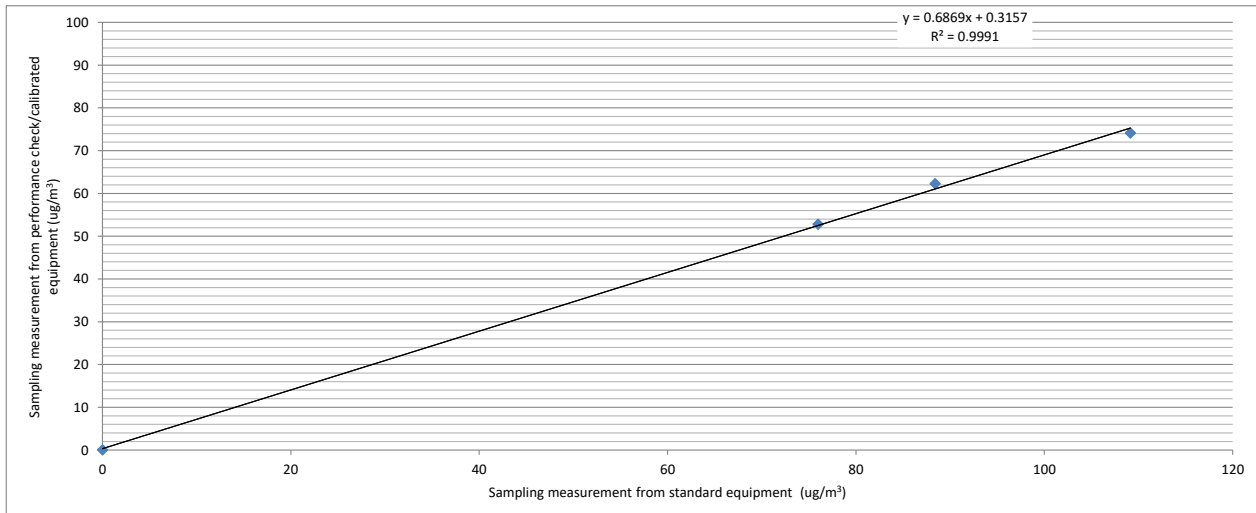

Operator: Henry Lau
Checked by: Chan Ka Chun

Date: 14/1/19
Date: 14/1/19



Portable Dust Meter Performance Check Record

Portable Dust Meter

Type : Particulate Monitor
Manufacturer : MET ONE INSTRUMENTS
Model Number : BT-645
Serial Number : R22584
Performance Check Date : 27-Feb-19

Standard Equipment

Type : High Volume Sampler
Manufacturer : TISCH
Model Number : TE-5170
Equipment Number : HVS018
Last Calibration Date : 4-Dec-18


Portable Dust Meter Performance Check Results

Table with 6 columns: Trial no. in 1-hr period, Time, Mean Pressure (hPa), Mean Temp (°C), Concentration in ug/m³ (Standard equipment) (Y - Axis), Concentration in ug/m³ (Performance Check / Calibrated equipment) (X - Axis). Rows include Zero Check and trials 1, 2, 3.

\* Filter paper weighting was conducted by HOKLAS accredited laboratory.

Linear Regression of Y on X

Slope (K- factor) : 1.3000
Correlation Coefficient : 0.9900
Validity of Performance Check / Calibration Record : 27/2/2020

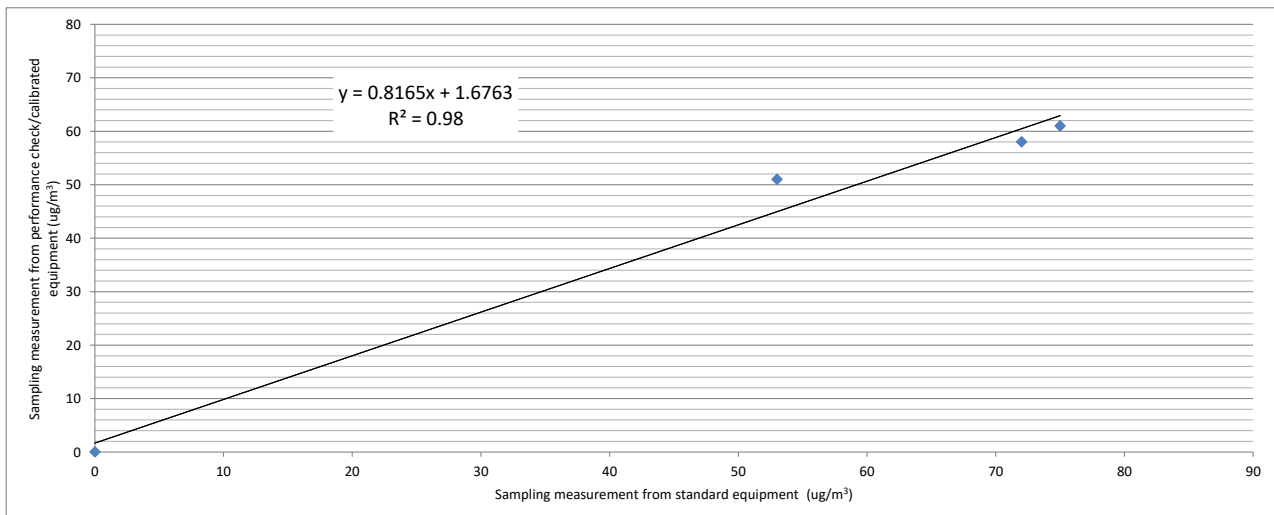

Operator: Henry Lau

Date: 27-Feb-19

Checked by: Chan Ka Chun

Date: 4-Mar-19





Portable Dust Meter Performance Check Record

Portable Dust Meter

Type : Particulate Monitor
Manufacturer : MET ONE INSTRUMENTS
Model Number : BT-645
Serial Number : R22586
Performance Check Date : 27-Feb-19, 14-Mar-19

Standard Equipment

Type : High Volume Sampler
Manufacturer : TISCH
Model Number : TE-5170
Equipment Number : HVS018
Last Calibration Date : 4-Feb-19


Portable Dust Meter Performance Check Results

Table with 6 columns: Trial no. in 1-hr period, Time, Mean Pressure (hPa), Mean Temp (°C), Concentration in ug/m³ (Standard equipment), Concentration in ug/m³ (Performance Check / Calibrated equipment). Rows include Zero Check and trials 1, 2, 3.

\* Filter paper weighting was conducted by HOKLAS accredited laboratory.

Linear Regression of Y on X

Slope (K- factor) : 1.4000
Correlation Coefficient : 0.9934
Validity of Performance Check / Calibration Record : 13/3/2020

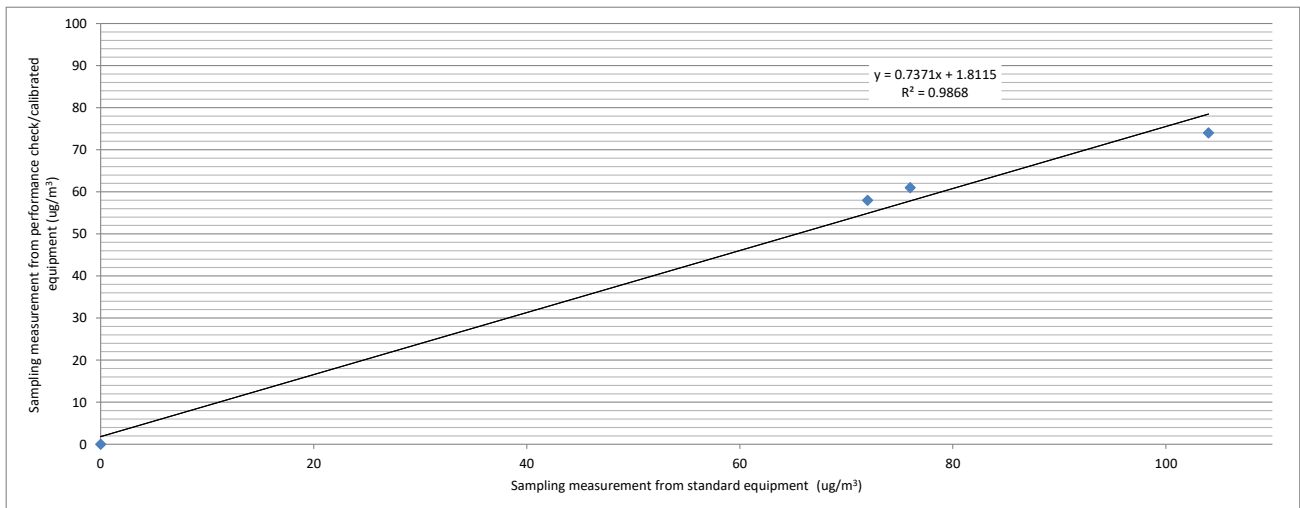

Operator: Henry Lau

Date: 14-Mar-19

Checked by: Chan Ka Chun

Date: 21-Mar-19



## REPORT OF EQUIPMENT PERFORMANCE CHECK / CALIBRATION

REPORT NO. : HK1810826  
 PROJECT NAME : PERFORMANCE CHECK / CALIBRATION OF DUST METER  
 DATE OF ISSUE : 16/8/2018

CUSTOMER : LAM ENVIRONMENTAL SERVICES LTD  
 ADDRESS : 11/F, CENTRE POINT, 181-185 GLOUCESTER ROAD, WAN CHAI, HONG KONG

REPORT NO. : HK1810826  
 PROJECT ITEM NO. : HK1810826-01  
 PERFORMANCE CHECK / CALIBRATED EQUIPMENT  
 TYPE : PARTICULATE MONITOR  
 MANUFACTURER : MET ONE INSTRUMENTS  
 MODEL NO. : BT 645  
 SERIAL NO. : X19295  
 EQUIPMENT NO. : ---  
 RECEIPT DATE : 16/8/2018  
 PERFORMANCE CHECK / CALIBRATION DATE : 16/8/2018

## PERFORMANCE CHECK / CALIBRATION Information

CODE	Calibration Parameter	Method Procedure	Reference Method
Dust PC/CAL	Performance Check / Calibration of Dust Meter	CAL003	General Technical Requirements of Environmental Monitoring, Environmental Monitoring & Audit Guidelines for Development Projects in HK

- Notes : 1. This report shall not be reproduced, except in full, without prior approval from Pilot Testing Limited.  
 2. Performance Check / Calibration result relates to performance check / calibration item(s) as received.

Approved Signatory

:

Issue Date:

16/8/2018

Wong Po Yan Pauline  
 (Assistant Laboratory Manager)


**REPORT OF PERFORMANCE CHECK / CALIBRATION**

PROJECT NAME : PERFORMANCE CHECK / CALIBRATION OF DUST METER  
 DATE OF ISSUE : 16/8/2018  
 REPORT NO. : HK1810826

**PERFORMANCE CHECK / CALIBRATED EQUIPMENT**

TYPE : PARTICULATE MONITOR  
 MANUFACTURER : MET ONE INSTRUMENTS  
 MODEL NO. : BT 645  
 SERIAL NO. : X19295  
 EQUIPMENT NO. : ---  
 PERFORMANCE CHECK / CALIBRATION DATE : 16/8/2018

**STANDARD EQUIPMENT**


TYPE : HIGH VOLUME AIR SAMPLER  
 MANUFACTURER : TISCH  
 MODEL NO. : TE-5170  
 EQUIPMENT REF NO. : PTL\_HV002  
 LAST CALIBRATION DATE : 25/7/2018

**EQUIPMENT PERFORMANCE CHECK / CALIBRATION RESULTS:**

Trial no. in 1-hr period	Time	Mean Temp (°C)	Mean Pressure (hPa)	Concentration in ug/m <sup>3</sup> (Standard equipment) (Y - Axis)	Concentration in ug/m <sup>3</sup> (Performance Check / Calibrated equipment) (X - Axis)
Zero Check <sup>1</sup>	16/8/2018, 8:30:00 AM	27.8	1000	0	0
1	16/8/2018, 2:16:00 PM	27.8	1000	36	39
2	16/8/2018, 3:21:00 PM	27.8	1000	35	31
3	16/8/2018, 4:24:00 PM	27.8	1000	6	7

**Linear Regression of Y on X**

Slope (K- factor) : 1.0000  
 Correlation Coefficient : 0.9901  
 Validity of Performance Check / Calibration Record : 16/8/2019

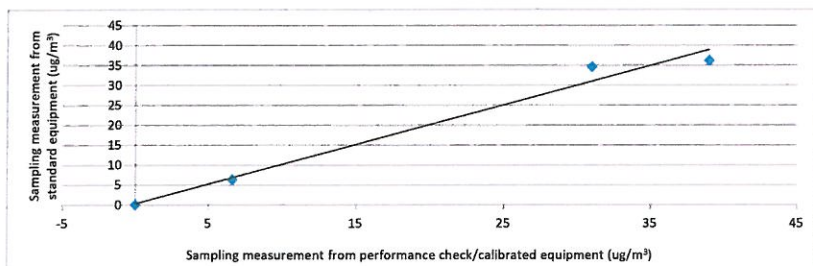

- Notes : 1. Zero check conducted as per CAL003 SOP and manufacturer's manual as appropriate.  
 2. This report shall not be reproduced, except in full, without prior approval from Pilot Testing Limited.  
 3. Performance Check / Calibration result relates to performance check / calibration item(s) as received.

Operator: Lau, Natalie Signature:  Date: 16/8/2018

Checked by: Wong Po Yan, Pauline Signature:  Date: 16/8/2018


**REPORT OF EQUIPMENT PERFORMANCE CHECK / CALIBRATION**

**REPORT NO.** : HK1810819  
**PROJECT NAME** : PERFORMANCE CHECK / CALIBRATION OF DUST METER  
**DATE OF ISSUE** : 16/8/2018  
**CUSTOMER** : LAM ENVIRONMENTAL SERVICES LTD  
**ADDRESS** : 11/F, CENTRE POINT, 181-185 GLOUCESTER ROAD, WAN CHAI, HONG KONG


**REPORT NO.** : HK1810819  
**PROJECT ITEM NO.** : HK1810819-01  
**PERFORMANCE CHECK / CALIBRATED EQUIPMENT**  
**TYPE** : AEROSOL MASS MONITOR  
**MANUFACTURER** : MET ONE INSTRUMENTS  
**MODEL NO.** : AEROCET - 831  
**SERIAL NO.** : W16848  
**EQUIPMENT NO.** : ---  
**RECEIPT DATE** : 14/8/2018  
**PERFORMANCE CHECK / CALIBRATION DATE** : 15/8/2018

**PERFORMANCE CHECK / CALIBRATION Information**

CODE	Calibration Parameter	Method Procedure	Reference Method
Dust PC/CAL	Performance Check / Calibration of Dust Meter	CAL003	General Technical Requirements of Environmental Monitoring, Environmental Monitoring & Audit Guidelines for Development Projects in HK

- Notes :
1. This report shall not be reproduced, except in full, without prior approval from Pilot Testing Limited.
  2. Performance Check / Calibration result relates to performance check / calibration item(s) as received.

Approved Signatory

  
 \_\_\_\_\_  
 Wong Po Yan Pauline  
 (Assistant Laboratory Manager)

Issue Date:

16/8/2018


**REPORT OF PERFORMANCE CHECK / CALIBRATION**

PROJECT NAME : PERFORMANCE CHECK / CALIBRATION OF DUST METER  
 DATE OF ISSUE : 16/8/2018  
 REPORT NO. : HK1810819

**PERFORMANCE CHECK / CALIBRATED EQUIPMENT**

TYPE : AEROSOL MASS MONITOR  
 MANUFACTURER : MET ONE INSTRUMENTS  
 MODEL NO. : AEROCET - 831  
 SERIAL NO. : W16848  
 EQUIPMENT NO. : ---  
 PERFORMANCE CHECK / CALIBRATION DATE : 15/8/2018

**STANDARD EQUIPMENT**


TYPE : HIGH VOLUME AIR SAMPLER  
 MANUFACTURER : TISCH  
 MODEL NO. : TE-5170  
 EQUIPMENT REF NO. : PTL\_HV002  
 LAST CALIBRATION DATE : 25/7/2018

**EQUIPMENT PERFORMANCE CHECK / CALIBRATION RESULTS:**

Trial no. in 1-hr period	Time	Mean Temp (°C)	Mean Pressure (hPa)	Concentration in ug/m <sup>3</sup> (Standard equipment) (Y - Axis)	Concentration in ug/m <sup>3</sup> (Performance Check / Calibrated equipment) (X - Axis)
Zero Check <sup>1</sup>	15/8/2018,9:05:00 AM	28.2	999	0	0
1	15/8/2018,10:20:00 AM	28.2	999	37	85
2	15/8/2018,11:22:00 AM	28.2	999	35	83
3	15/8/2018,12:29:00 PM	28.2	999	9	27

**Linear Regression of Y on X**

Slope (K- factor) : 0.4400  
 Correlation Coefficient : 0.9988  
 Validity of Performance Check / Calibration Record : 15/8/2019

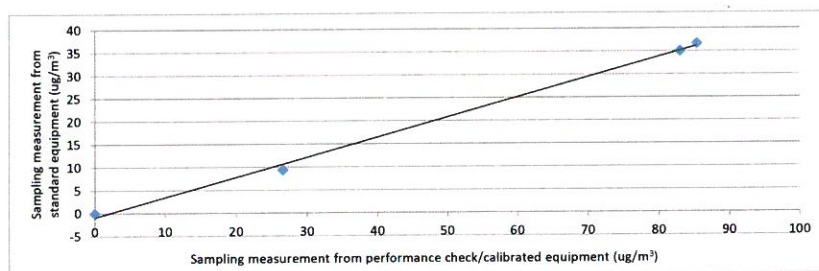

- Notes : 1. Zero check conducted as per CAL003 SOP and manufacturer's manual as appropriate.  
 2. This report shall not be reproduced, except in full, without prior approval from Pilot Testing Limited.  
 3. Performance Check / Calibration result relates to performance check / calibration item(s) as received.

Operator: Lau, Natalie Signature: *Natalie Lau* Date: 15/8/2018

Checked by: Wong Po Yan, Pauline Signature: *Pauline Wong* Date: 16/8/2018




**REPORT OF EQUIPMENT PERFORMANCE CHECK / CALIBRATION**

REPORT NO. : HK1811049  
 PROJECT NAME : PERFORMANCE CHECK / CALIBRATION OF DUST METER  
 DATE OF ISSUE : 24/10/2018

CUSTOMER : LAM ENVIRONMENTAL SERVICES LTD  
 ADDRESS : 11/F, CENTRE POINT, 181-185 GLOUCESTER ROAD, WAN CHAI, HONG KONG

REPORT NO. : HK1811049  
 PROJECT ITEM NO. : HK1811049-01  
**PERFORMANCE CHECK / CALIBRATED EQUIPMENT**  
 TYPE : AEROSOL MASS MONITOR  
 MANUFACTURER : MET ONE INSTRUMENTS  
 MODEL NO. : AEROCET - 831  
 SERIAL NO. : W15448  
 EQUIPMENT NO. : ---  
 RECEIPT DATE : 18/10/2018  
 PERFORMANCE CHECK / CALIBRATION DATE : 18/10/2018

**PERFORMANCE CHECK / CALIBRATION Information**

CODE	Calibration Parameter	Method Procedure	Reference Method
Dust PC/CAL	Performance Check / Calibration of Dust Meter	CAL003	General Technical Requirements of Environmental Monitoring, Environmental Monitoring & Audit Guidelines for Development Projects in HK

- Notes : 1. This report shall not be reproduced, except in full, without prior approval from Pilot Testing Limited.  
 2. Performance Check / Calibration result relates to performance check / calibration item(s) as received.

Approved Signatory :

Issue Date:

24/10/2018

Wong Po Yan Pauline  
 (Assistant Laboratory Manager)



**REPORT OF PERFORMANCE CHECK / CALIBRATION**

PROJECT NAME : PERFORMANCE CHECK / CALIBRATION OF DUST METER  
 DATE OF ISSUE : 24/10/2018  
 REPORT NO. : HK1811049

**PERFORMANCE CHECK / CALIBRATED EQUIPMENT**

TYPE : AEROSOL MASS MONITOR  
 MANUFACTURER : MET ONE INSTRUMENTS  
 MODEL NO. : AEROCET - 831  
 SERIAL NO. : W15448  
 EQUIPMENT NO. : ---  
 PERFORMANCE CHECK / CALIBRATION DATE : 18/10/2018

**STANDARD EQUIPMENT**


TYPE : HIGH VOLUME AIR SAMPLER  
 MANUFACTURER : TISCH  
 MODEL NO. : TE-5170  
 EQUIPMENT REF NO. : PTL\_HV002  
 LAST CALIBRATION DATE : 25/7/2018

**EQUIPMENT PERFORMANCE CHECK / CALIBRATION RESULTS:**

Trial no. in 1-hr period	Time	Mean Temp (°C)	Mean Pressure (hPa)	Concentration in ug/m <sup>3</sup> (Standard equipment) (Y - Axis)	Concentration in ug/m <sup>3</sup> (Performance Check / Calibrated equipment) (X - Axis)
Zero Check <sup>1</sup>	18/10/2018,9:05:00 AM	22.5	1015	0	0
1	18/10/2018,2:16:00 PM	22.5	1015	31	44
2	18/10/2018,3:18:00 PM	22.5	1015	30	44
3	18/10/2018,4:21:00 PM	22.5	1015	26	35

**Linear Regression of Y on X**

Slope (K- factor) : 0.7000  
 Correlation Coefficient : 0.9962  
 Validity of Performance Check / Calibration Record : 18/10/2019

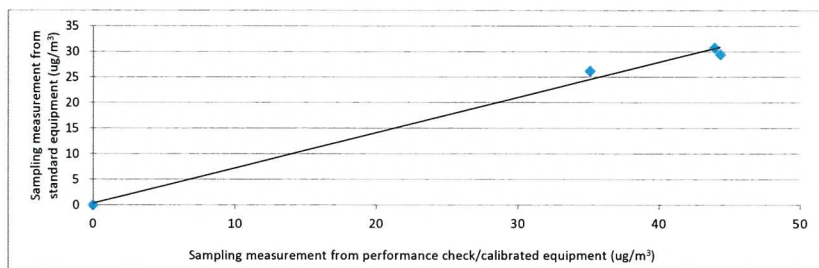

- Notes :
1. Zero check conducted as per CAL003 SOP and manufacturer's manual as appropriate.
  2. This report shall not be reproduced, except in full, without prior approval from Pilot Testing Limited.
  3. Performance Check / Calibration result relates to performance check / calibration item(s) as received.

Operator: Lau, Natalie Signature: *Natalie Lau* Date: 18/10/2018

Checked by: Wong Po Yan, Pauline Signature: *Pauline Wong* Date: 24/10/2018


**REPORT OF EQUIPMENT PERFORMANCE CHECK / CALIBRATION**

**REPORT NO.** : HK1811054  
**PROJECT NAME** : PERFORMANCE CHECK / CALIBRATION OF DUST METER  
**DATE OF ISSUE** : 24/10/2018  
  
**CUSTOMER** : LAM ENVIRONMENTAL SERVICES LTD  
**ADDRESS** : 11/F, CENTRE POINT, 181-185 GLOUCESTER ROAD, WAN CHAI, HONG KONG


**REPORT NO.** : HK1811054  
**PROJECT ITEM NO.** : HK1811054-01  
**PERFORMANCE CHECK / CALIBRATED EQUIPMENT**  
**TYPE** : AEROSOL MASS MONITOR  
**MANUFACTURER** : MET ONE INSTRUMENTS  
**MODEL NO.** : AEROCET - 831  
**SERIAL NO.** : W15449  
**EQUIPMENT NO.** : ---  
**RECEIPT DATE** : 18/10/2018  
**PERFORMANCE CHECK / CALIBRATION DATE** : 23/10/2018

**PERFORMANCE CHECK / CALIBRATION Information**

CODE	Calibration Parameter	Method Procedure	Reference Method
Dust PC/CAL	Performance Check / Calibration of Dust Meter	CAL003	General Technical Requirements of Environmental Monitoring, Environmental Monitoring & Audit Guidelines for Development Projects in HK

- Notes :
1. This report shall not be reproduced, except in full, without prior approval from Pilot Testing Limited.
  2. Performance Check / Calibration result relates to performance check / calibration item(s) as received.

Approved Signatory

  
 \_\_\_\_\_  
 Wong Po Yan Pauline  
 (Assistant Laboratory Manager)

Issue Date: 24/10/2018





**REPORT OF PERFORMANCE CHECK / CALIBRATION**

PROJECT NAME : PERFORMANCE CHECK / CALIBRATION OF DUST METER  
 DATE OF ISSUE : 24/10/2018  
 REPORT NO. : HK1811054

**PERFORMANCE CHECK / CALIBRATED EQUIPMENT**

TYPE : AEROSOL MASS MONITOR  
 MANUFACTURER : MET ONE INSTRUMENTS  
 MODEL NO. : AEROCET - 831  
 SERIAL NO. : W15449  
 EQUIPMENT NO. : ---  
 PERFORMANCE CHECK / CALIBRATION DATE : 23/10/2018

**STANDARD EQUIPMENT**


TYPE : HIGH VOLUME AIR SAMPLER  
 MANUFACTURER : TISCH  
 MODEL NO. : TE-5170  
 EQUIPMENT REF NO. : PTL\_HV002  
 LAST CALIBRATION DATE : 25/7/2018

**EQUIPMENT PERFORMANCE CHECK / CALIBRATION RESULTS:**

Trial no. in 1-hr period	Time	Mean Temp (°C)	Mean Pressure (hPa)	Concentration in ug/m <sup>3</sup> (Standard equipment) (Y - Axis)	Concentration in ug/m <sup>3</sup> (Performance Check / Calibrated equipment) (X - Axis)
Zero Check <sup>1</sup>	23/10/2018,9:05:00 AM	25.3	1017	0	0
1	23/10/2018,10:20:00 AM	25.3	1017	45	51
2	23/10/2018,11:22:00 AM	25.3	1017	32	39
3	23/10/2018,12:29:00 PM	25.3	1017	12	19

**Linear Regression of Y on X**

Slope (K- factor) : 0.8800  
 Correlation Coefficient : 0.9945  
 Validity of Performance Check / Calibration Record : 23/10/2019

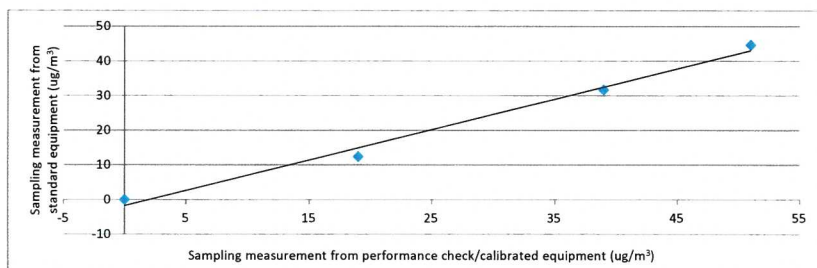

- Notes :
1. Zero check conducted as per CAL003 SOP and manufacturer's manual as appropriate.
  2. This report shall not be reproduced, except in full, without prior approval from Pilot Testing Limited.
  3. Performance Check / Calibration result relates to performance check / calibration item(s) as received.

Operator: Lau, Natalie Signature:  Date: 23/10/2018

Checked by: Wong Po Yan, Pauline Signature:  Date: 24/10/2018



## REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

CONTACT:	CHAN KA CHUN	WORK ORDER:	HK1912921
CLIENT:	LAM ENVIRONMENTAL SERVICES LTD		
ADDRESS:	11/F CENTRE POINT, 181-185 GLOUCESTER ROAD, WANCHAI, HONG KONG	SUB-BATCH:	0
		LABORATORY:	HONG KONG
		DATE RECEIVED:	27-Mar-2019
		DATE OF ISSUE:	02-Apr-2019

### COMMENTS

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

**The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the ALS Hong Kong laboratory or quoted from relevant international standards.**

Scope of Test:	Dissolved Oxygen, pH Value, Salinity and Temperature
Equipment Type:	Multifunctional Meter
Brand Name:	YSI
Model No.:	Professional Plus
Serial No.:	14M100277
Equipment No.:	--
Date of Calibration:	02 April, 2019

### NOTES

This is the Final Report and supersedes any preliminary report with this batch number.

Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

Mr Chan Siu Ming, Vico  
Manager - Inorganic

*This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.*

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



WORK ORDER: HK1912921  
 SUB-BATCH: 0  
 DATE OF ISSUE: 02-Apr-2019  
 CLIENT: LAM ENVIRONMENTAL SERVICES LTD

Equipment Type: Multifunctional Meter  
 Brand Name: YSI  
 Model No.: Professional Plus  
 Serial No.: 14M100277  
 Equipment No.: --  
 Date of Calibration: 02 April, 2019

Date of Next Calibration: 02 July, 2019

**PARAMETERS:**

Dissolved Oxygen Method Ref: APHA (21st edition), 4500-O: G

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)
2.85	2.66	-0.19
5.99	5.79	-0.20
8.54	8.57	+0.03
	Tolerance Limit (mg/L)	±0.20

pH Value

Method Ref: APHA (21st edition), 4500H:B

Expected Reading (pH unit)	Displayed Reading (pH unit)	Tolerance (pH unit)
4.0	3.82	-0.18
7.0	6.83	-0.17
10.0	9.87	-0.13
	Tolerance Limit (pH unit)	±0.20

Salinity

Method Ref: APHA (21st edition), 2520B

Expected Reading (ppt)	Displayed Reading (ppt)	Tolerance (%)
0	0.00	--
10	9.95	-0.5
20	20.10	+0.5
30	30.03	+0.1
	Tolerance Limit (%)	±10.0

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Mr Chan Siu Ming, Vico  
 Manager - Inorganic

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



WORK ORDER: HK1912921  
SUB-BATCH: 0  
DATE OF ISSUE: 02-Apr-2019  
CLIENT: LAM ENVIRONMENTAL SERVICES LTD

Equipment Type: Multifunctional Meter  
Brand Name: YSI  
Model No.: Professional Plus  
Serial No.: 14M100277  
Equipment No.: --  
Date of Calibration: 02 April, 2019

Date of Next Calibration: 02 July, 2019

## PARAMETERS:

Temperature

Method Ref: Section 6 of International Accreditation New Zealand Technical Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

Expected Reading (°C)	Displayed Reading (°C)	Tolerance (°C)
9.0	8.2	-0.8
23.0	22.6	-0.4
40.0	39.3	-0.7
	Tolerance Limit (°C)	±2.0

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

A handwritten signature in black ink, appearing to read 'Chan Siu Ming'.

Mr Chan Siu Ming, Vico  
Manager - Inorganic



## REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

CONTACT:	CHAN KA CHUN	WORK ORDER:	HK1916521
CLIENT:	LAM ENVIRONMENTAL SERVICES LTD		
ADDRESS:	11/F CENTRE POINT, 181-185 GLOUCESTER ROAD, WANCHAI, HONG KONG	SUB-BATCH:	0
		LABORATORY:	HONG KONG
		DATE RECEIVED:	17-Apr-2019
		DATE OF ISSUE:	25-Apr-2019

### COMMENTS

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the ALS Hong Kong laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principle as practised by the ALS Hong Kong laboratory or quoted from relevant international standards.

Scope of Test:	Dissolved Oxygen, pH Value, Salinity and Temperature
Equipment Type:	Multifunctional Meter
Brand Name:	YSI
Model No.:	Professional Plus
Serial No.:	17F100236
Equipment No.:	--
Date of Calibration:	24-Apr-2019

### NOTES

This is the Final Report and supersedes any preliminary report with this batch number.

Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

Ms. Lin Wai Yu  
Assistant Manager - Inorganic

*This report may not be reproduced except with prior written approval from ALS Technichem (HK) Pty Ltd.*

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



**WORK ORDER:** HK1916521  
**SUB-BATCH:** 0  
**DATE OF ISSUE:** 25-Apr-2019  
**CLIENT:** LAM ENVIRONMENTAL SERVICES LTD

**Equipment Type:** Multifunctional Meter  
**Brand Name:** YSI  
**Model No.:** Professional Plus  
**Serial No.:** 17F100236  
**Equipment No.:** --  
**Date of Calibration:** 24-Apr-2019                      **Date of Next Calibration:** 24-Jul-2019

**PARAMETERS:**  
 Dissolved Oxygen    Method Ref: APHA (21st edition), 4500-O: G

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)
8.15	8.07	-0.08
5.90	6.05	+0.15
2.64	2.69	+0.05
Tolerance Limit (mg/L)		±0.20

pH Value                      Method Ref: APHA (21st edition), 4500H:B

Expected Reading (pH unit)	Displayed Reading (pH unit)	Tolerance (pH unit)
4.0	4.00	+0.00
7.0	7.20	+0.20
10.0	10.05	+0.05
Tolerance Limit (pH unit)		±0.20

Salinity                      Method Ref: APHA (21st edition), 2520B

Expected Reading (ppt)	Displayed Reading (ppt)	Tolerance (%)
0	0.00	--
10	9.86	-1.4
20	19.53	-2.3
30	29.81	-0.6
Tolerance Limit (%)		±10.0

**Remark:** "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

*Nis*

\_\_\_\_\_  
 Ms. Lin Wai Yu  
 Assistant Manager - Inorganic

# REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



WORK ORDER: HK1916521  
SUB-BATCH: 0  
DATE OF ISSUE: 25-Apr-2019  
CLIENT: LAM ENVIRONMENTAL SERVICES LTD

Equipment Type: Multifunctional Meter  
Brand Name: YSI  
Model No.: Professional Plus  
Serial No.: 17F100236  
Equipment No.: --  
Date of Calibration: 24-Apr-2019

Date of Next Calibration: 24-Jul-2019

PARAMETERS:  
Temperature

Method Ref: Section 6 of International Accreditation New Zealand Technical  
Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

Expected Reading (°C)	Displayed Reading (°C)	Tolerance (°C)
9.5	9.7	+0.2
22.0	22.1	+0.1
38.5	38.2	-0.3
	Tolerance Limit (°C)	±2.0

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Ms. Lin Wai Yu  
Assistant Manager - Inorganic



REPORT OF EQUIPMENT PERFORMANCE CHECK / CALIBRATION

Information supplied by customer:

CONTACT: MR. CHAN KA CHUN                      JOB REFERENCE NO.: 22777053-E29V4502  
 CLIENT: LAM GEOTECHNICS LIMITED  
 DATE RECEIVED: 29/05/2019  
 DATE OF ISSUE: 18/06/2019  
 ADDRESS: 11/F, CENTRE POINT, 181-185, GLOUCESTER ROAD,  
 WANCHAI, HONG KONG  
 PROJECT: ---

METHOD OF PERFORMANCE CHECK/ CALIBRATION:

Ref: APHA22nd ed 2130B

COMMENTS

It is certified that the item under performance check/calibration has been calibrated/checked by corresponding calibrated equipment in the laboratory.


Maximum Tolerance and calibration frequency stated in the report, unless otherwise stated, the internal acceptance criteria of FT Laboratories Ltd will be followed.

Scope of Test:	Turbidity
Equipment Type:	Turbidimeter
Brand Name:	Xin Rui
Model No.:	WGZ-3B
Serial No.:	1807077
Equipment No.:	---
Date of Calibration:	01/06/2019

Remarks:

This is the Final Report. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

Certified By:

  
 \_\_\_\_\_  
 HO Lai Sze  
 Senior Chemist

Issue Date:

\_\_\_\_\_ 18/06/2019

This report may not be reproduced except with prior written approval from FT Laboratories Ltd.

Form No.: HG022-002 Rev 0 20190101

Page 1 of 2





REPORT OF EQUIPMENT PERFORMANCE CHECK / CALIBRATION

WORK ORDER: 22777053-E29V4502  
DATE OF ISSUE: 18/06/2019  
CLIENT: LAM GEOTECHNICS LIMITED

Equipment Type:	Turbidimeter
Brand Name:	Xin Rui
Model No.:	WGZ-3B
Serial No.:	1807077
Equipment No.:	---
Date of Calibration:	01/06/2019
Date of next Calibration:	31/08/2019
Lab ID:	H190165-02

Parameters:

Turbidity

Method Ref: APHA 22<sup>nd</sup> ed. 2130B

Expected Reading (NTU)	Display Reading (NTU)	Tolerance
0	0.00	---
4	4.32	8.0%
10	9.99	-0.1%
40	43.32	8.3%
100	100.30	0.3%
400	435	8.6%
1000	1002	0.2%
	Tolerance Limit ( $\pm$ )	10%

Remark: "Displayed Reading" presents the figures shown on item under calibration/checking regardless of equipment precision or significant figures.



REPORT OF EQUIPMENT PERFORMANCE CHECK / CALIBRATION

Information supplied by customer:

CONTACT: MR. CHAN KA CHUN                           JOB REFERENCE NO.:   22777053-E29V4501  
CLIENT: LAM GEOTECHNICS LIMITED  
DATE RECEIVED: 29/05/2019  
DATE OF ISSUE: 18/06/2019  
ADDRESS: 11/F, CENTRE POINT, 181-185, GLOUCESTER ROAD,  
          WANCHAI, HONG KONG  
PROJECT: ---

**METHOD OF PERFORMANCE CHECK/ CALIBRATION:**

Ref: APHA22nd ed 2130B

**COMMENTS**


It is certified that the item under performance check/calibration has been calibrated/checked by corresponding calibrated equipment in the laboratory.  
Maximum Tolerance and calibration frequency stated in the report, unless otherwise stated, the internal acceptance criteria of FT Laboratories Ltd will be followed.

<b>Scope of Test:</b>	Turbidity
<b>Equipment Type:</b>	Turbidimeter
<b>Brand Name:</b>	Xin Rui
<b>Model No.:</b>	WGZ-3B
<b>Serial No.:</b>	1807079
<b>Equipment No.:</b>	---
<b>Date of Calibration:</b>	01/06/2019

Remarks:

This is the Final Report. Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

Certified By:

  
HO Lai Sze  
Senior Chemist

Issue Date:

18/06/2019

This report may not be reproduced except with prior written approval from FT Laboratories Ltd.

Form No.: HG022-002 Rev 0 20190101

Page 1 of 2



REPORT OF EQUIPMENT PERFORMANCE CHECK / CALIBRATION

WORK ORDER: 22777053-E29V4501  
DATE OF ISSUE: 18/06/2019  
CLIENT: LAM GEOTECHNICS LIMITED

Equipment Type:	Turbidimeter
Brand Name:	Xin Rui
Model No.:	WGZ-3B
Serial No.:	1807079
Equipment No.:	---
Date of Calibration:	01/06/2019
Date of next Calibration:	31/08/2019
Lab ID:	H190165-01

Parameters:

Turbidity

Method Ref: APHA 22<sup>nd</sup> ed. 2130B

Expected Reading (NTU)	Display Reading (NTU)	Tolerance
0	0.00	---
4	4.21	5.3%
10	9.84	-1.6%
40	37.74	-5.7%
100	98.14	-1.9%
400	435	8.8%
1000	991	-0.9%
	Tolerance Limit ( $\pm$ )	10%


Remark: "Displayed Reading" presents the figures shown on item under calibration/checking regardless of equipment precision or significant figures.




***Appendix 4.3***



***Wind data extracted from HKO Automatic Weather Station***




# A. Wind Direction extracted from Tate's Cairn HKO Automatic Weather Station

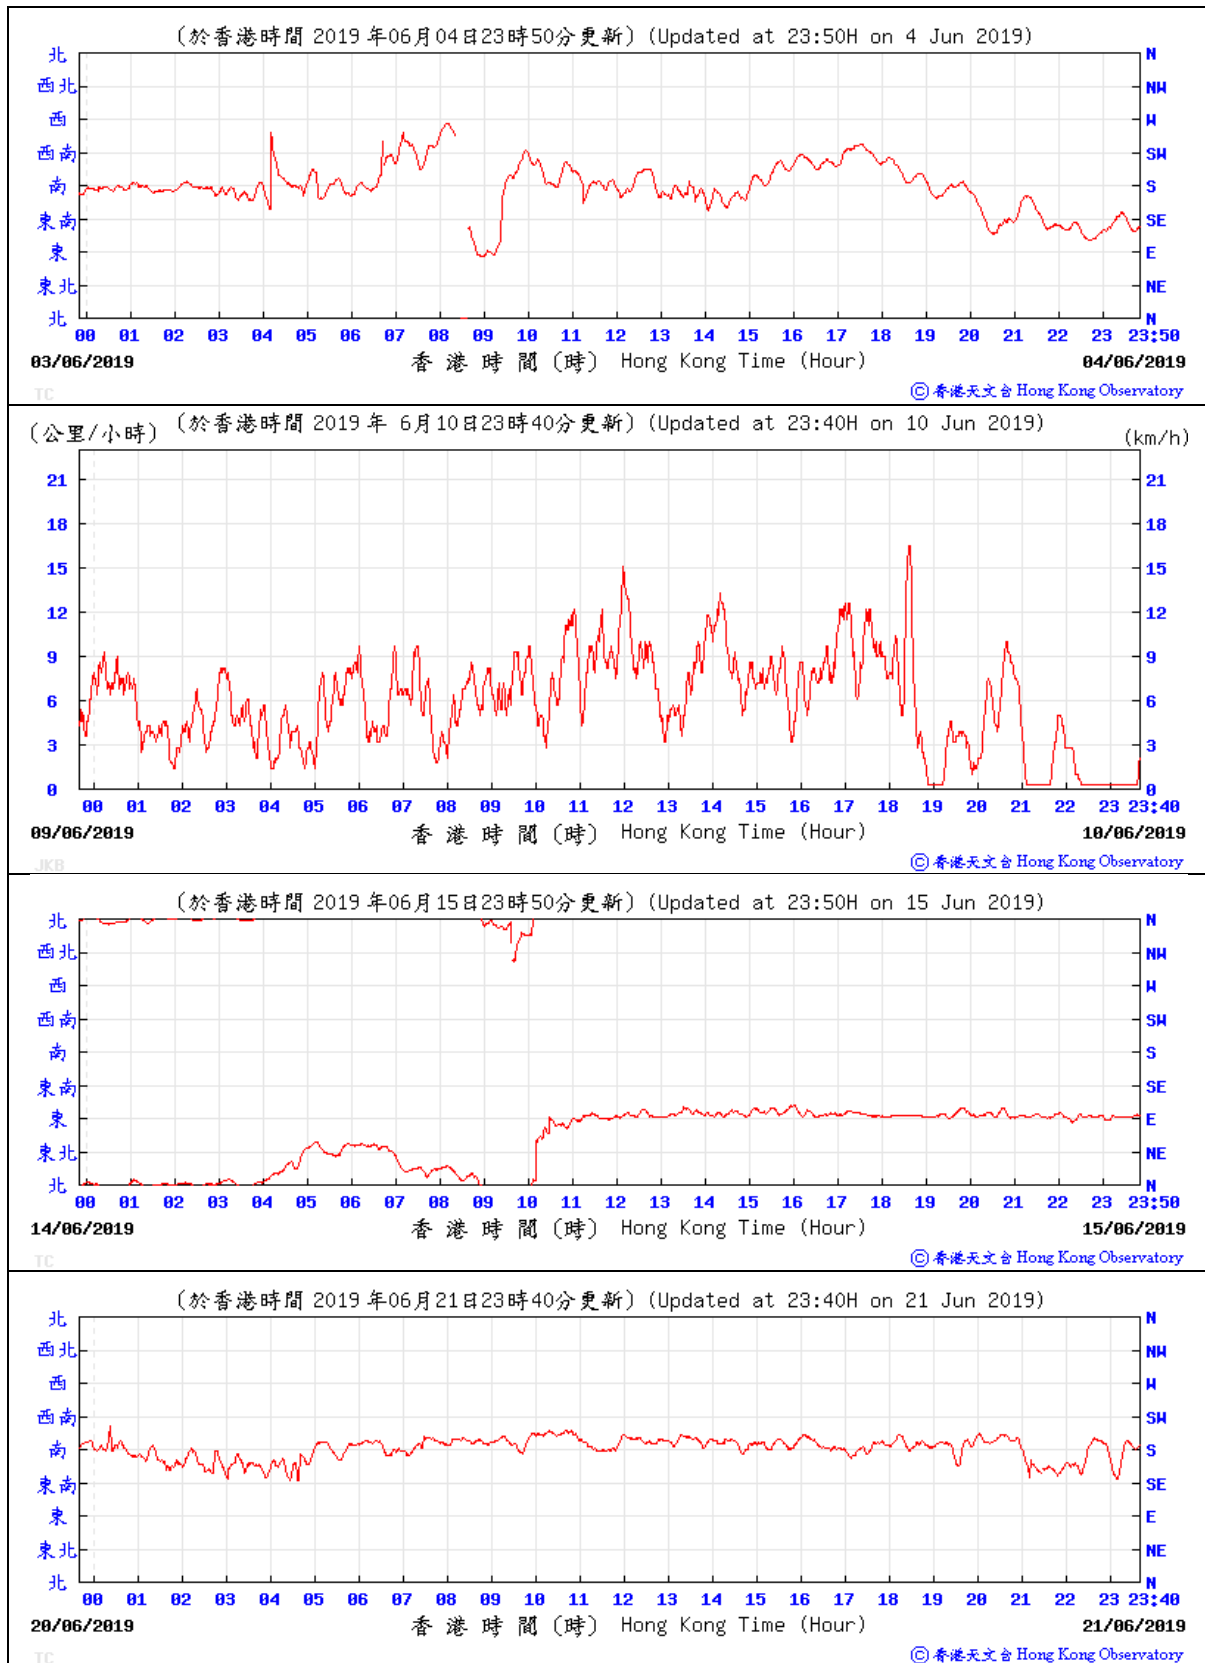

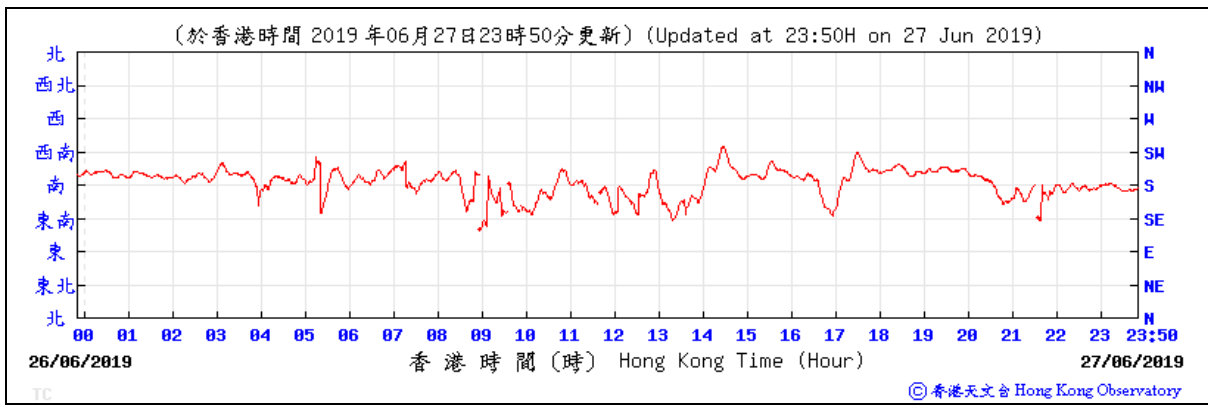



## B. Wind Speed extracted from Tate's Cairn HKO Automatic Weather Station

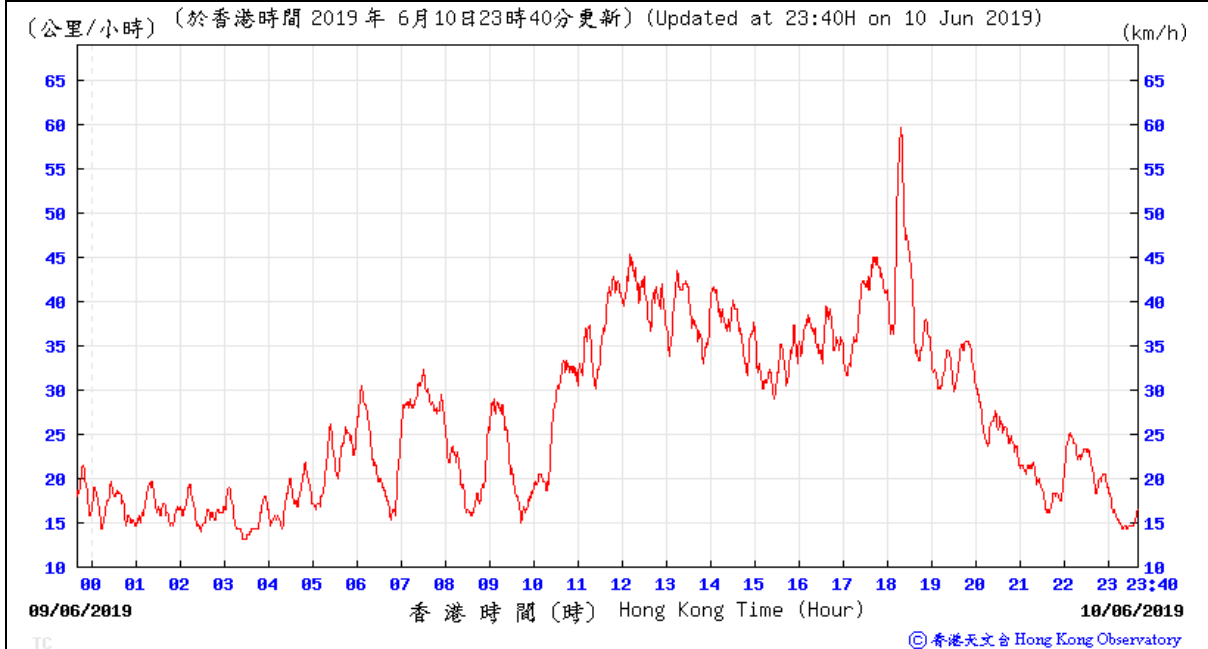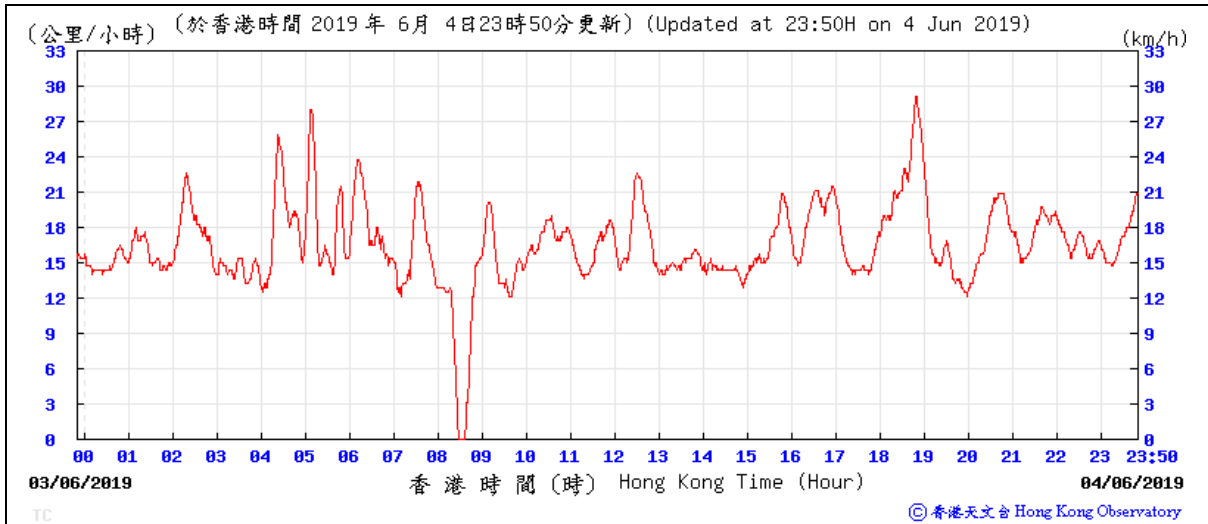

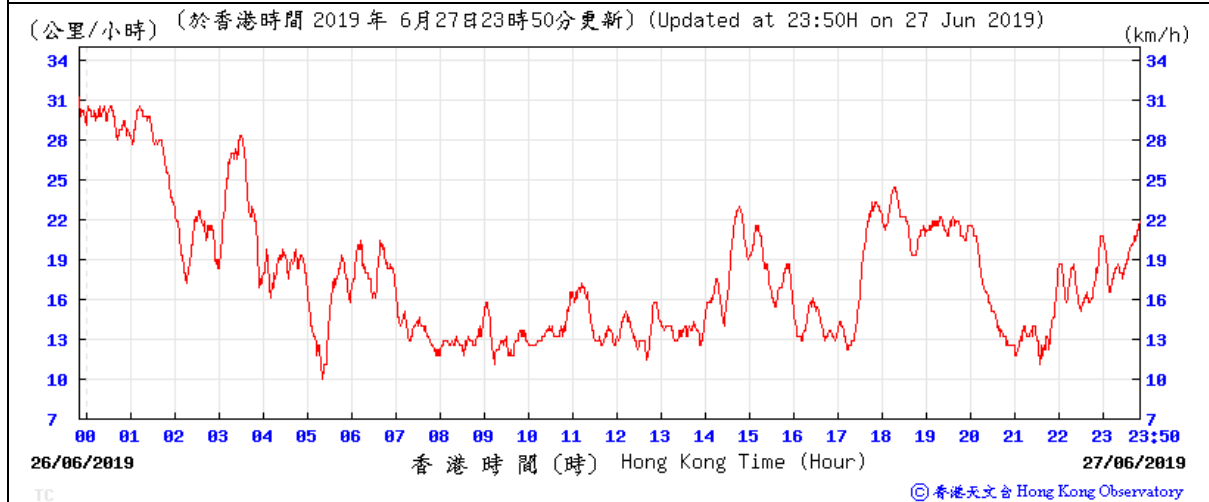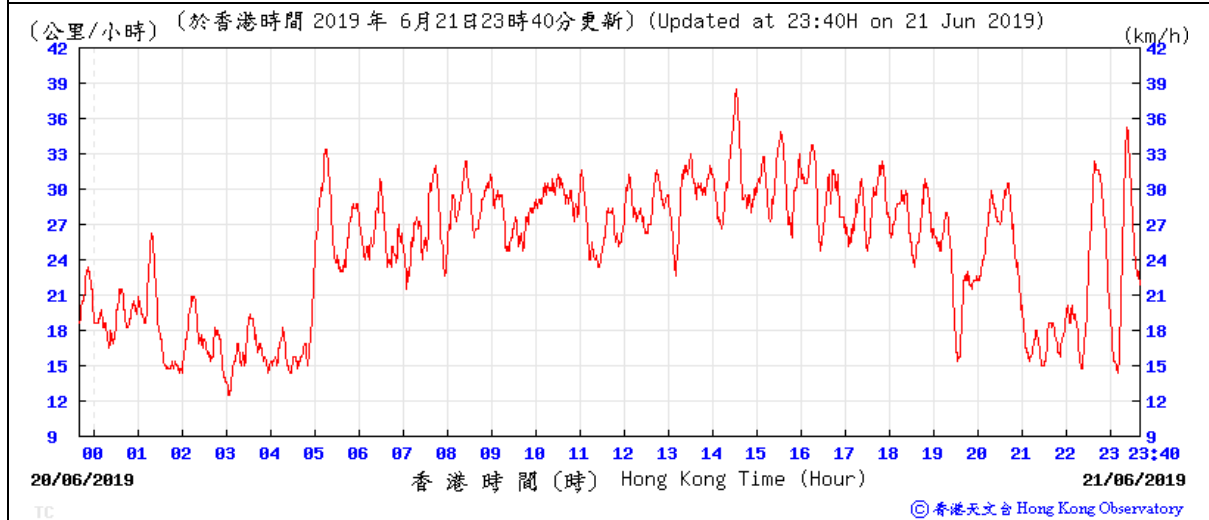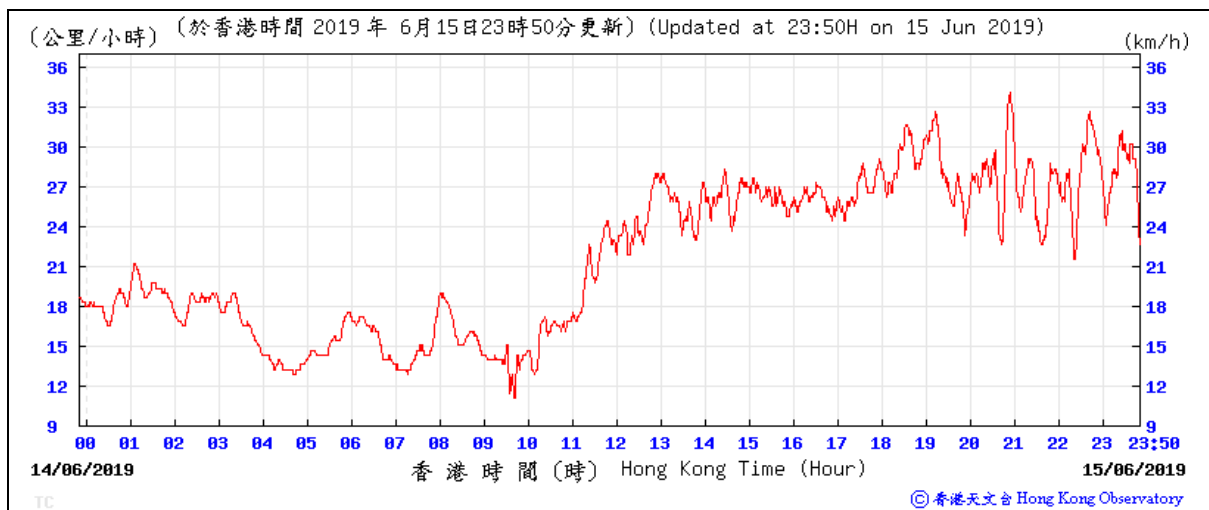





### C. Wind Direction extracted from Tseung Kwan O HKO Automatic Weather Station

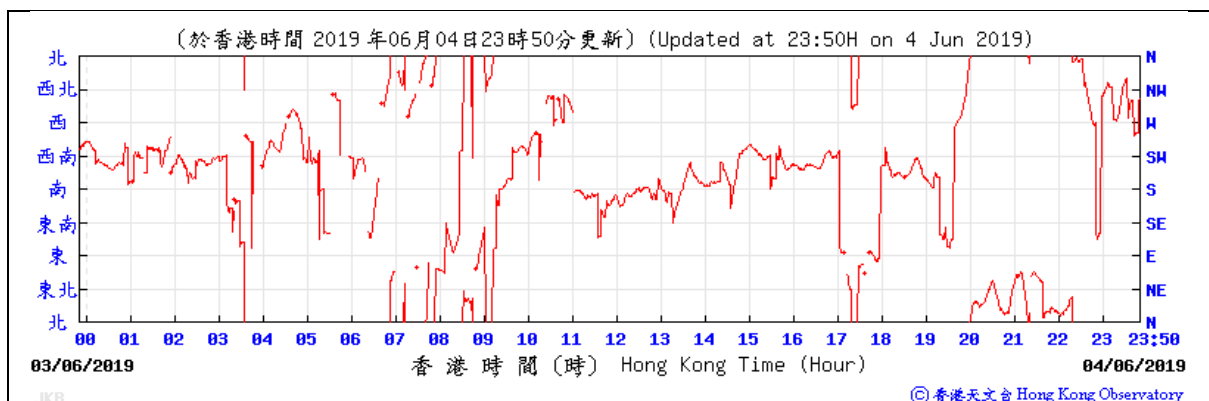


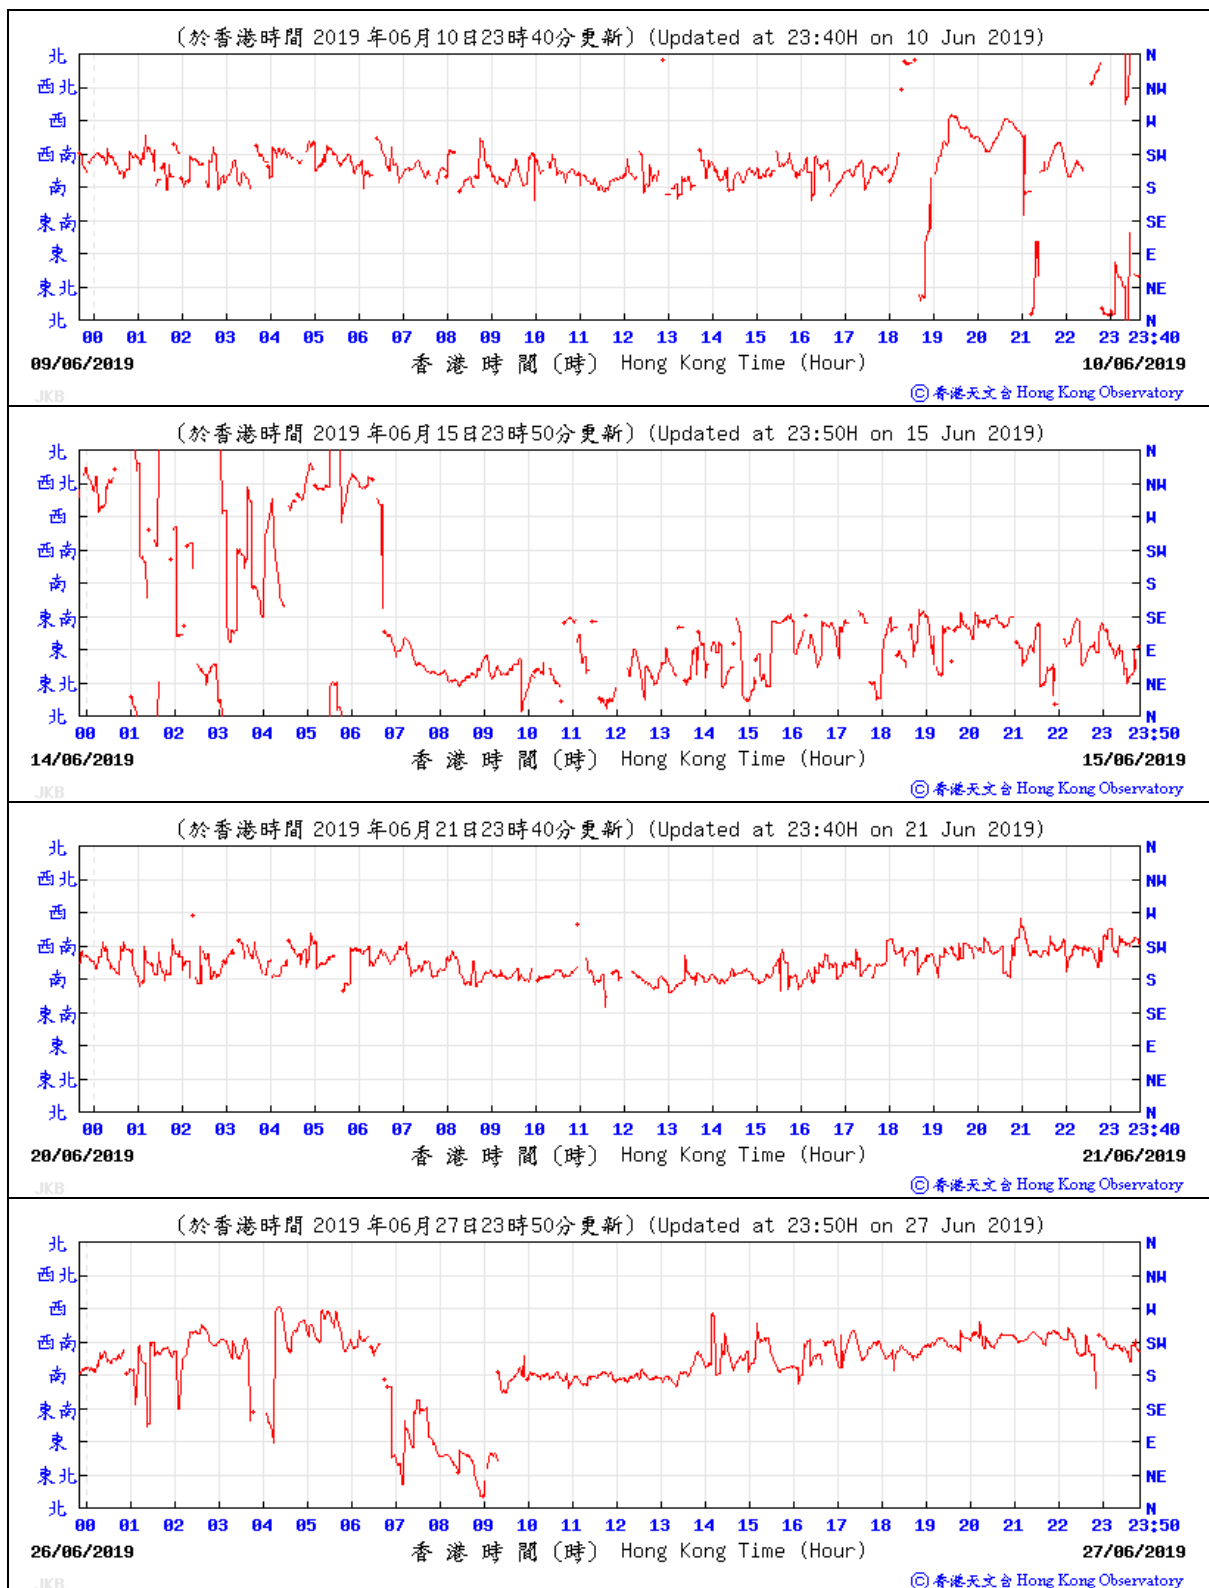

D. Wind Speed extracted from Tseung Kwan O HKO Automatic Weather Station



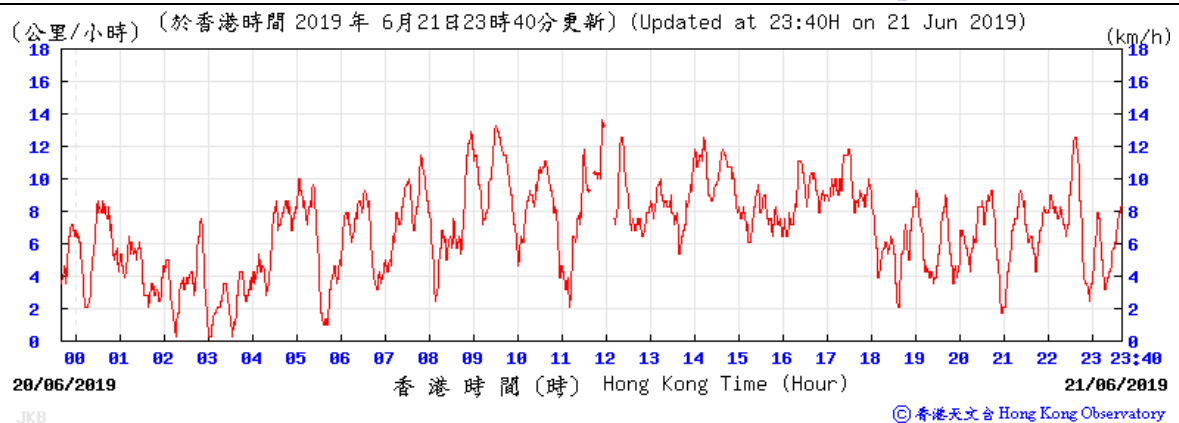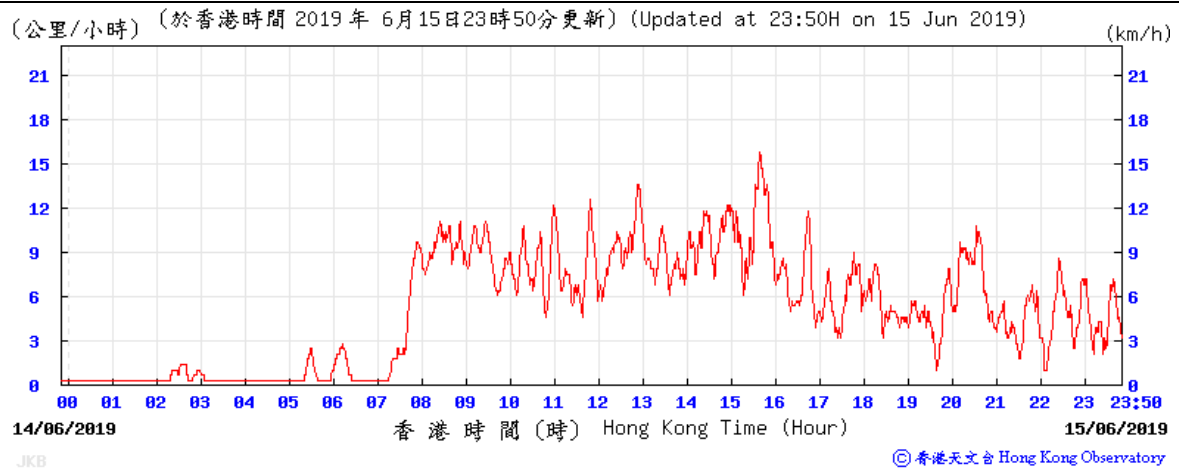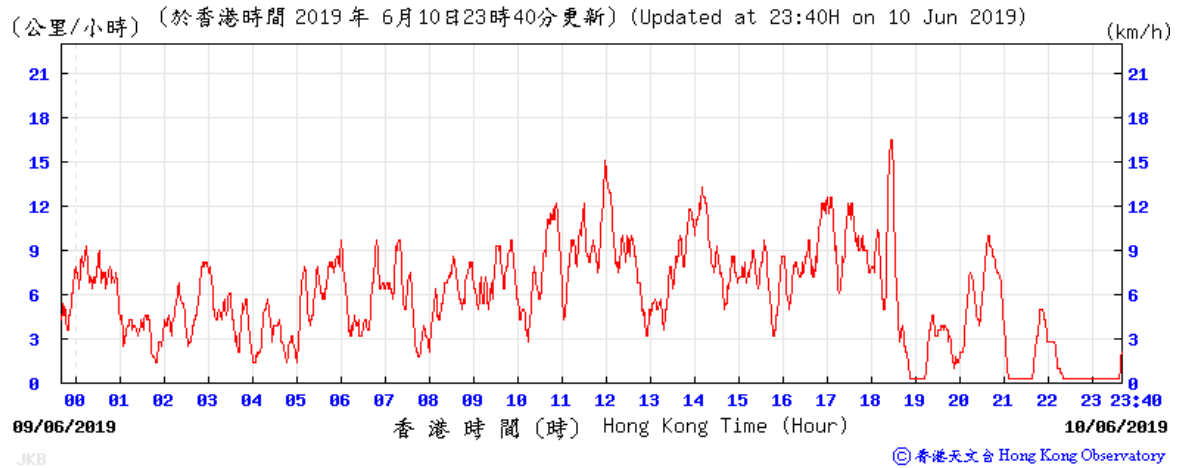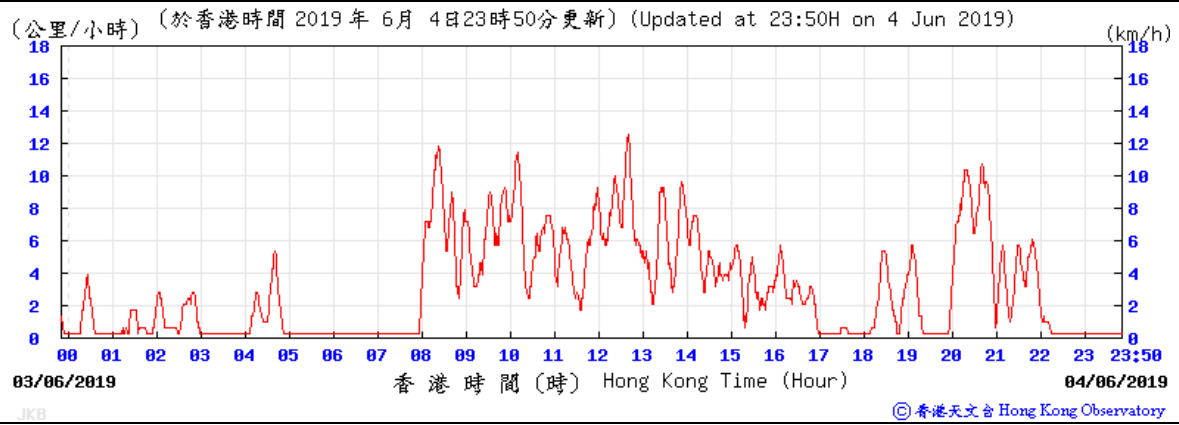

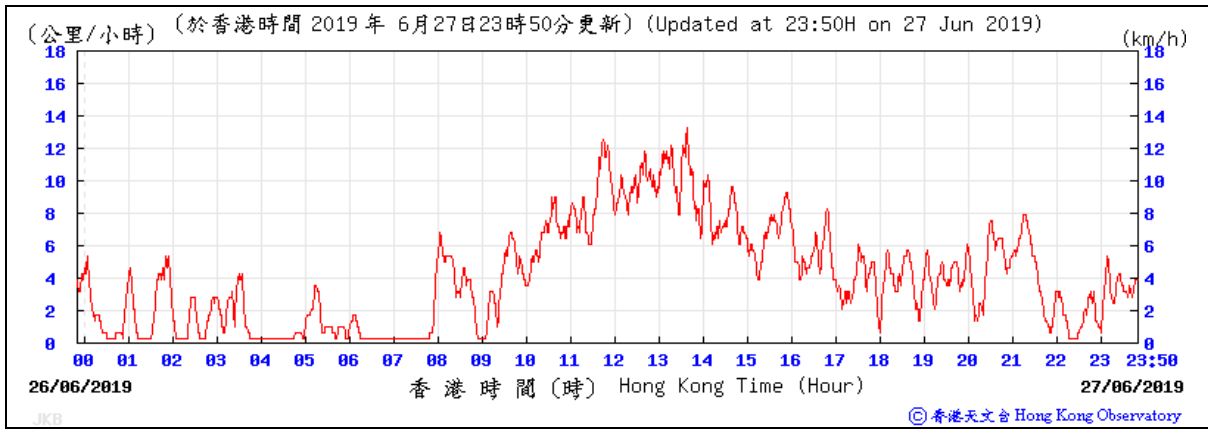



***Appendix 5.1***

***Monitoring Schedules for Reporting Month***



**SERVICE CONTRACT NO. EDO/01/2017**  
**ENVIRONMENTAL TEAM FOR DEVELOPMENT OF**  
**ANDERSON ROAD QUARRY SITE - ROAD IMPROVEMENT WORKS**  
**Impact Water Quality, Air Quality and Noise Monitoring Schedule**  
**June 2019**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
						01-Jun
02-Jun	03-Jun WQM	04-Jun AQM NM	05-Jun WQM	06-Jun	07-Jun	08-Jun WQM
09-Jun	10-Jun WQM AQM	11-Jun NM	12-Jun WQM	13-Jun	14-Jun WQM	15-Jun AQM
16-Jun	17-Jun WQM NM	18-Jun	19-Jun WQM	20-Jun	21-Jun WQM AQM	22-Jun
23-Jun	24-Jun WQM	25-Jun NM	26-Jun WQM	27-Jun AQM	28-Jun WQM	29-Jun
30-Jun						

Remark:

1. WQM: Water Quality Monitoring

AQM: Air Quality Monitoring

NM: Noise monitoring is scheduled at the beginning of each week

2. Monitoring Location:

Inland Water	Station	Description
Channelized nullah across the project site	E	Upstream Control Station
	F	Downstream Impact Station
Ma Yau Tong Stream	H	Upstream Control Station
	I	Downstream Impact Station

3. The interval between 2 sets of monitoring should not be less than 36 hours



**SERVICE CONTRACT NO. EDO/01/2017**  
**ENVIRONMENTAL TEAM FOR DEVELOPMENT OF**  
**ANDERSON ROAD QUARRY SITE - ROAD IMPROVEMENT WORKS**  
**Tentative Impact Water Quality, Air Quality and Noise Monitoring Schedule**  
**July 2019**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
	01-Jul	02-Jul	03-Jul	04-Jul	05-Jul	06-Jul
		WQM NM	AQM	WQM		WQM
07-Jul	08-Jul	09-Jul	10-Jul	11-Jul	12-Jul	13-Jul
	WQM NM	AQM	WQM		WQM	
14-Jul	15-Jul	16-Jul	17-Jul	18-Jul	19-Jul	20-Jul
	WQM NM AQM		WQM		WQM	AQM
21-Jul	22-Jul	23-Jul	24-Jul	25-Jul	26-Jul	27-Jul
	WQM NM		WQM		WQM AQM	
28-Jul	29-Jul	30-Jul	31-Jul			
	WQM NM		WQM			

Remark:

1. WQM: Water Quality Monitoring

AQM: Air Quality Monitoring

NM: Noise monitoring is scheduled at the beginning of each week

2. Monitoring Location:

Inland Water	Station	Description
Channelized nullah across the project site	E	Upstream Control Station
	F	Downstream Impact Station
Ma Yau Tong Stream	H	Upstream Control Station
	I	Downstream Impact Station

3. The interval between 2 sets of monitoring should not be less than 36 hours



***Appendix 5.2***

***Noise Monitoring Results and Graphical Presentations***



**Noise Monitoring Result**

**Day Time (0700 - 1900hrs on normal weekdays)**

Location: NMC-01 - G/F, Kei Shun Special School

Date	Weather	Time	Measurement Noise Level			Average Noise Level	Baseline Level	Construction Noise Level	Limit Level
			Leq	L10	L90	Leq	Leq	Leq	Leq
			Unit: dB(A), (5-min)			Unit: dB(A), (30-min)			
4 Jun 2019	Cloudy	14:23	66.4	69.4	63.1	67	69.3	<Baseline Level	70
		14:28	66.8	68.2	62.3				
		14:33	67.3	68.7	61.3				
		14:38	66.7	68.4	61.1				
		14:43	67.1	69.7	61.6				
		14:48	66.5	69.1	62.5				
11 Jun 2019	Cloudy	8:47	66.3	69.3	62.7	66	69.3	<Baseline Level	70
		8:52	66.5	70.1	62.2				
		8:57	65.9	69.4	62.5				
		9:02	66.7	69.6	63.1				
		9:07	65.5	70.4	63.3				
		9:12	65.6	70.3	62.4				
17 Jun 2019	Cloudy	13:04	68.3	70.9	63.4	68	69.3	<Baseline Level	70
		13:09	67.7	71.2	64.2				
		13:14	68.5	71.4	63.6				
		13:19	68.3	71.6	62.7				
		13:24	67.3	72.3	63.8				
		13:29	67.2	72.4	62.5				
25 Jun 2019	Fine	8:47	66.5	68.8	61.3	66	69.3	<Baseline Level	70
		8:52	65.9	68.6	61.5				
		8:57	65.7	69.6	61.7				
		9:02	66.3	69.4	62.8				
		9:07	66.1	69.5	62.4				
		9:12	65.8	69.8	61.5				



**Noise Monitoring Result**

**Day Time (0700 - 1900hrs on normal weekdays)**

Location: NMC-02 - 3/F podium, Shun Lee Disciplined Services Quarters Block 6

Date	Weather	Time	Measurement Noise Level			Average Noise Level	Baseline Level	Construction Noise Level	Limit Level
			Leq	L10	L90	Leq	Leq	Leq	Leq
			Unit: dB(A), (5-min)			Unit: dB(A), (30-min)			
4 Jun 2019	Cloudy	13:45	72.4	76.2	68.3	73	72.0	66	75
		13:50	73.4	75.5	68.5				
		13:55	73.6	76.8	68.9				
		14:00	72.8	75.3	69.2				
		14:05	72.6	76.4	69.7				
		14:10	73.0	75.9	68.9				
11 Jun 2019	Cloudy	9:25	71.6	74.6	64.9	72	72.0	<Baseline Level	75
		9:30	72.0	74.3	65.2				
		9:35	71.8	75.1	64.7				
		9:40	71.5	74.9	65.3				
		9:45	71.9	74.6	65.1				
		9:50	72.1	75.2	65.7				
17 Jun 2019	Cloudy	13:49	72.4	76.4	69.9	72	72.0	62.0	75
		13:54	72.6	76.1	68.3				
		13:59	72.4	75.9	68.6				
		14:04	71.9	75.7	68.4				
		14:09	72.8	76.4	68.9				
		14:14	72.3	76.3	69.4				
25 Jun 2019	Fine	9:31	73.5	76.4	68.4	74	72.0	69.0	75
		9:36	73.8	76.8	69.3				
		9:41	73.7	76.4	68.6				
		9:46	74.1	77.1	68.7				
		9:51	74.3	77.0	69.0				
		9:56	73.6	76.6	69.1				





**Noise Monitoring Result**

**Day Time (0700 - 1900hrs on normal weekdays)**

Location: NMC-03 - G/F, Sienna Garden Block 6

Date	Weather	Time	Measurement Noise Level			Average Noise Level	Baseline Level	Construction Noise Level	Limit Level
			Leq	L10	L90	Leq	Leq	Leq	Leq
			Unit: dB(A), (5-min)			Unit: dB(A), (30-min)			
4 Jun 2019	Cloudy	13:01	80.3	82.9	62.3	79	78.2	73	75
		13:06	78.4	83.1	63.1				
		13:11	79.2	82.6	62.6				
		13:16	80.4	83.5	61.1				
		13:21	78.1	82.7	60.9				
		13:26	79.3	83.2	61.3				
11 Jun 2019	Cloudy	10:04	78.9	80.3	63.5	78	78.2	48	75
		10:09	78.3	80.6	61.4				
		10:14	78.4	79.9	61.3				
		10:19	77.5	80.1	62.8				
		10:24	78.6	79.9	63.5				
		10:29	77.3	80.6	62.4				
17 Jun 2019	Cloudy	14:35	79.3	82.5	63.5	80	78.2	75.0	75
		14:40	79.9	82.8	62.8				
		14:45	80.0	82.1	63.1				
		14:50	79.7	82.8	62.4				
		14:55	80.8	82.2	63.2				
		15:00	80.4	82.7	63.2				
25 Jun 2019	Fine	10:15	80.4	83.5	64.3	79	78.2	74.0	75
		10:20	79.5	84.9	63.4				
		10:25	78.4	82.1	63.8				
		10:30	80.1	84.5	64.2				
		10:35	79.2	83.4	64.6				
		10:40	78.9	83.1	64.8				



**Noise Monitoring Result**

**Day Time (0700 - 1900hrs on normal weekdays)**

Location: NMC-04 - 3/F Podium, Po Tat Estate Tat Kai House

Date	Weather	Time	Measurement Noise Level			Average Noise Level	Baseline Level	Construction Noise Level	Limit Level
			Leq	L10	L90	Leq	Leq	Leq	Leq
			Unit: dB(A), (5-min)			Unit: dB(A), (30-min)			
4 Jun 2019	Cloudy	10:50	65.3	67.4	63.5	66	66.6	<Baseline Level	75
		10:55	66.4	68.0	62.1				
		11:00	65.1	67.7	62.6				
		11:05	65.8	67.9	62.6				
		11:10	66.4	68.2	62.9				
		11:15	65.3	68.3	63.6				
11 Jun 2019	Cloudy	10:52	64.0	68.3	61.4	64	66.6	<Baseline Level	75
		10:57	63.4	68.7	61.2				
		11:02	64.6	68.7	60.8				
		11:07	64.1	69.2	61.1				
		11:12	63.8	68.9	61.3				
		11:17	63.5	68.4	60.7				
17 Jun 2019	Cloudy	15:31	65.1	67.2	62.5	65	66.6	<Baseline Level	75
		15:36	64.9	67.5	62.1				
		15:41	64.6	67.3	62.7				
		15:46	64.7	67.8	62.0				
		15:51	65.3	68.2	61.6				
		15:56	65.7	67.9	61.7				
25 Jun 2019	Fine	11:17	62.6	66.3	61.5	63	66.6	<Baseline Level	75
		11:22	62.8	65.4	59.8				
		11:27	63.4	65.6	60.1				
		11:32	63.7	65.6	60.5				
		11:37	63.3	65.7	60.4				
		11:42	62.4	66.4	60.8				



**Noise Monitoring Result**

**Day Time (0700 - 1900hrs on normal weekdays)**

Location: NMC-05 - G/F, Hong Wah Court Block B Yee Hong House


Date	Weather	Time	Measurement Noise Level			Average Noise Level	Baseline Level	Construction Noise Level	Limit Level
			Leq	L10	L90	Leq	Leq	Leq	Leq
			Unit: dB(A), (5-min)			Unit: dB(A), (30-min)			
4 Jun 2019	Cloudy	10:05	59.3	62.3	57.7	60	61.8	<Baseline Level	75
		10:10	60.6	62.6	57.4				
		10:15	59.7	63.1	57.6				
		10:20	60.2	63.4	58.1				
		10:25	59.3	63.2	57.0				
		10:30	58.9	62.8	57.3				
11 Jun 2019	Cloudy	11:28	63.4	65.5	58.1	63	61.8	56	75
		11:33	62.5	65.3	57.9				
		11:38	63.1	64.9	57.3				
		11:43	63.5	65.2	58.0				
		11:48	61.7	63.8	57.4				
		11:53	62.9	64.4	58.2				
17 Jun 2019	Cloudy	16:11	64.1	66.9	59.4	64	61.8	61	75
		16:16	64.3	67.1	58.8				
		16:21	63.9	66.7	58.3				
		16:26	64.6	67.5	58.7				
		16:31	64.9	67.1	59.0				
		16:36	63.8	67.3	58.5				
25 Jun 2019	Fine	13:00	65.9	68.6	60.1	66	61.8	64	75
		13:05	66.4	69.3	59.4				
		13:10	65.3	69.1	59.6				
		13:15	65.7	68.8	59.3				
		13:20	66.1	68.6	60.3				
		13:25	66.3	68.9	60.5				




Graphic Presentation of Noise Monitoring Result

Day Time (0700 - 1900hrs on normal weekdays)

NMC-01 - G/F, Kei Shun Special School

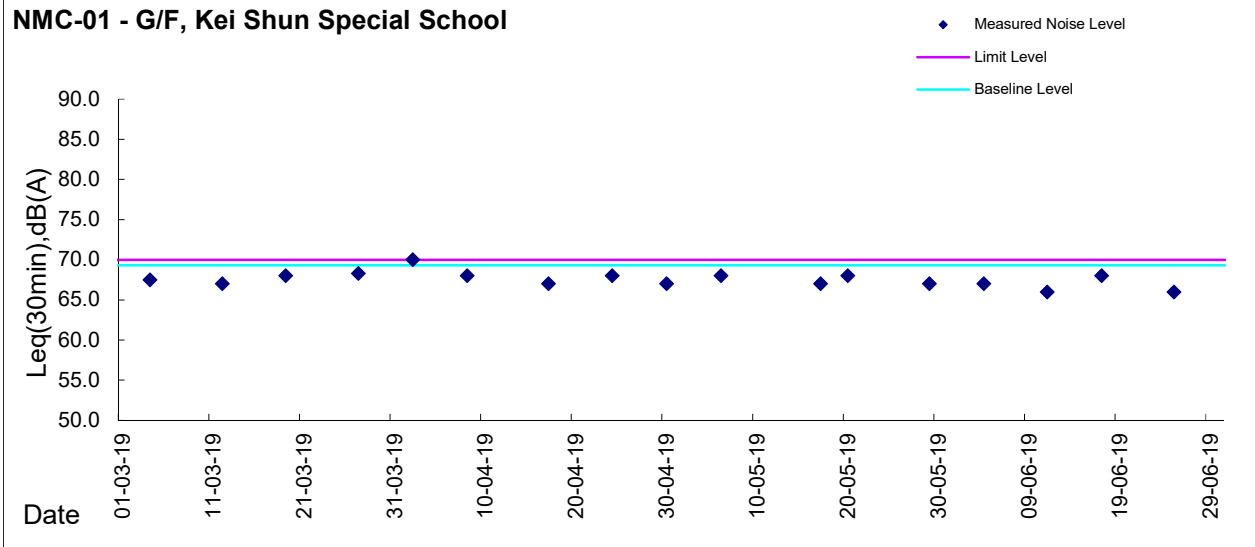

NMC-02 - 3/F podium, Shun Lee Disciplined Services Quarters

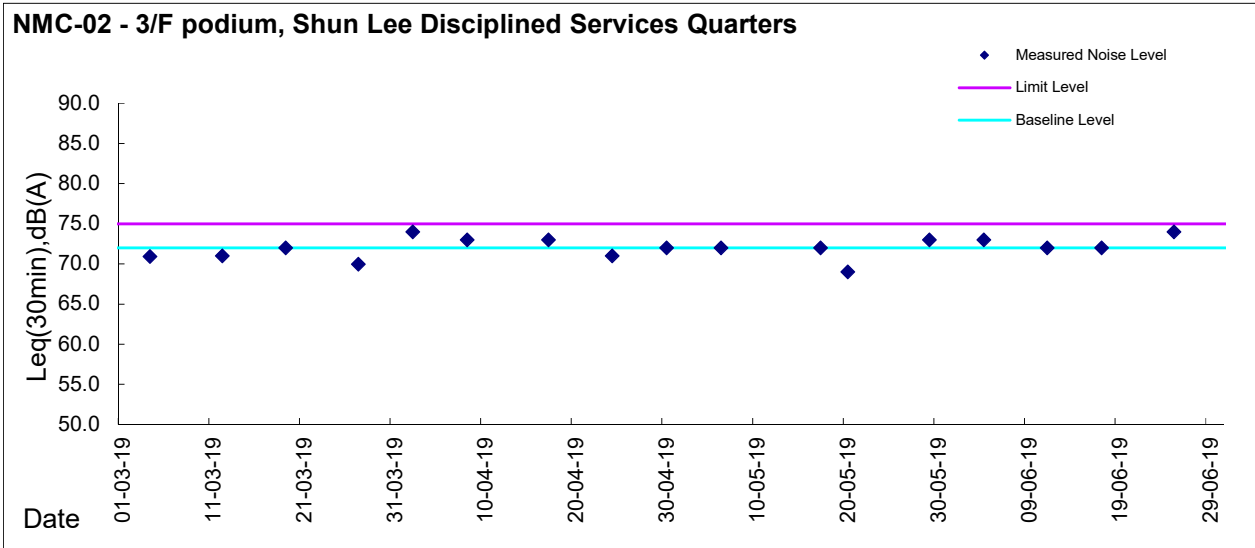





**Graphic Presentation of Noise Monitoring Result**

**Day Time (0700 - 1900hrs on normal weekdays)**

**NMC-03 - G/F, Sienna Garden Block 6**

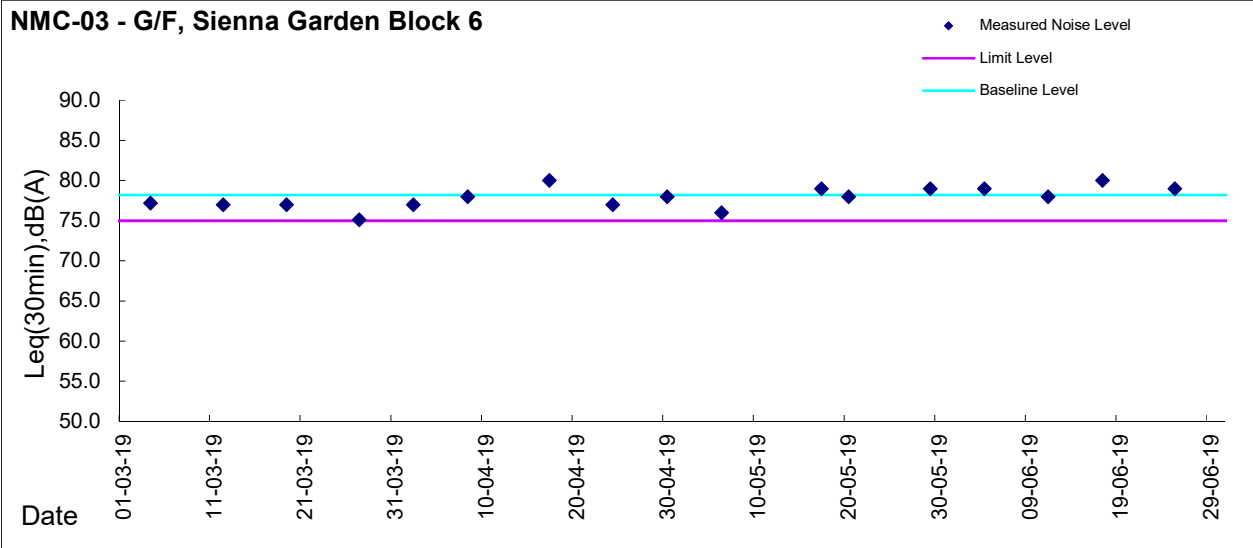


**NMC-04 - 3/F Podium, Po Tat Estate Tat Kai House**

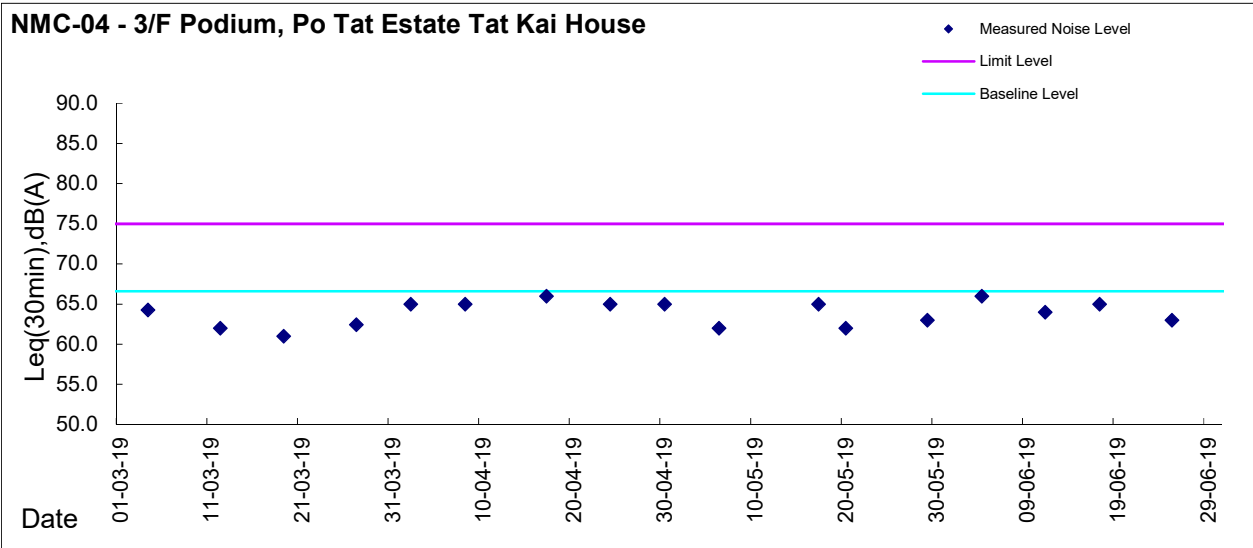



**Graphic Presentation of Noise Monitoring Result**  
**Day Time (0700 - 1900hrs on normal weekdays)**

**NMC-05 - G/F, Hong Wah Court Block B Yee Hong House**

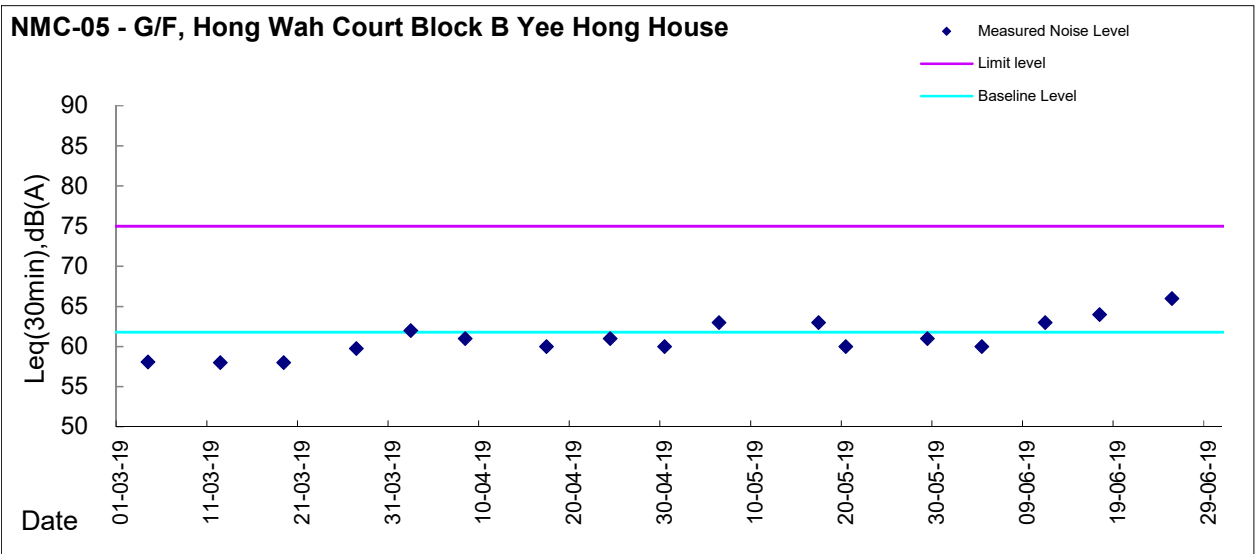



***Appendix 5.3***

***Air Quality Monitoring Results and Graphical Presentations***



Report on 1-hour TSP monitoring at NCWBR\_AMS-1 - Shun Lee Fire Station

Action Level ( $\mu\text{g}/\text{m}^3$ ) - 284.4  
Limit Level ( $\mu\text{g}/\text{m}^3$ ) - 500.0

Date	Weather Condition	Time	Mass Concentration ( $\mu\text{g}/\text{m}^3$ )
04-Jun-19	Cloudy	8:04	7.7
04-Jun-19	Cloudy	9:05	29.9
04-Jun-19	Cloudy	10:06	4.5
10-Jun-19	Cloudy	8:10	21.8
10-Jun-19	Cloudy	9:11	8.5
10-Jun-19	Cloudy	10:12	8.2
15-Jun-19	Cloudy	13:09	90.8
15-Jun-19	Cloudy	14:10	67.7
15-Jun-19	Cloudy	15:11	86.1
21-Jun-19	Fine	08:00	15.0
21-Jun-19	Fine	09:01	12.5
21-Jun-19	Fine	10:02	13.3
27-Jun-19	Cloudy	8:37	13.3
27-Jun-19	Cloudy	9:38	13.4
27-Jun-19	Cloudy	10:39	14.0





Report on 1-hour TSP monitoring at NCWBR\_AMS-2 - Shun Lee Estate Lee Hang House

Action Level ( $\mu\text{g}/\text{m}^3$ ) - 282.4  
Limit Level ( $\mu\text{g}/\text{m}^3$ ) - 500.0

Date	Weather Condition	Time	Mass Concentration ( $\mu\text{g}/\text{m}^3$ )
04-Jun-19	Cloudy	8:08	119.1
04-Jun-19	Cloudy	9:09	16.1
04-Jun-19	Cloudy	10:10	17.2
10-Jun-19	Cloudy	8:08	10.6
10-Jun-19	Cloudy	9:09	5.8
10-Jun-19	Cloudy	10:10	5.3
15-Jun-19	Cloudy	13:00	34.1
15-Jun-19	Cloudy	14:01	31.0
15-Jun-19	Cloudy	15:02	32.5
21-Jun-19	Fine	08:00	12.4
21-Jun-19	Fine	09:01	12.9
21-Jun-19	Fine	10:02	13.1
27-Jun-19	Cloudy	8:23	23.2
27-Jun-19	Cloudy	9:24	23.0
27-Jun-19	Cloudy	10:24	21.5



Report on 1-hour TSP monitoring at NCWBR\_AMS-3 - Shun Lee Disciplined Services  
Quarters (Block 6)  
Action Level ( $\mu\text{g}/\text{m}^3$ ) - 287.9  
Limit Level ( $\mu\text{g}/\text{m}^3$ ) - 500.0

Date	Weather Condition	Time	Mass Concentration ( $\mu\text{g}/\text{m}^3$ )
04-Jun-19	Cloudy	8:08	4.8
04-Jun-19	Cloudy	9:09	10.9
04-Jun-19	Cloudy	10:10	14.9
10-Jun-19	Cloudy	8:20	12.9
10-Jun-19	Cloudy	9:21	12.3
10-Jun-19	Cloudy	10:22	12.5
15-Jun-19	Cloudy	08:04	37.4
15-Jun-19	Cloudy	09:05	33.1
15-Jun-19	Cloudy	10:06	36.1
21-Jun-19	Fine	08:08	8.9
21-Jun-19	Fine	09:09	7.1
21-Jun-19	Fine	10:10	7.3
27-Jun-19	Cloudy	8:35	21.9
27-Jun-19	Cloudy	9:36	20.5
27-Jun-19	Cloudy	10:37	20.7



Report on 1-hour TSP monitoring at NCWBR\_AMS-4 - Sienna Garden

Action Level ( $\mu\text{g}/\text{m}^3$ ) - 281.6  
Limit Level ( $\mu\text{g}/\text{m}^3$ ) - 500.0

Date	Weather Condition	Time	Mass Concentration ( $\mu\text{g}/\text{m}^3$ )
04-Jun-19	Cloudy	8:19	4.9
04-Jun-19	Cloudy	9:20	12.3
04-Jun-19	Cloudy	10:21	16.0
10-Jun-19	Cloudy	8:09	14.3
10-Jun-19	Cloudy	9:10	4.5
10-Jun-19	Cloudy	10:11	3.8
15-Jun-19	Cloudy	08:07	30.7
15-Jun-19	Cloudy	09:08	22.9
15-Jun-19	Cloudy	10:09	29.9
21-Jun-19	Fine	08:27	29.0
21-Jun-19	Fine	09:28	23.2
21-Jun-19	Fine	10:29	22.9
27-Jun-19	Cloudy	8:33	23.0
27-Jun-19	Cloudy	9:34	23.4
27-Jun-19	Cloudy	10:35	17.9

Report on 1-hour TSP monitoring at NCWBR\_AMS-5 - Shun Chi Court Shun Fung House

Action Level ( $\mu\text{g}/\text{m}^3$ ) - 270.0  
 Limit Level ( $\mu\text{g}/\text{m}^3$ ) - 500.0

Date	Weather Condition	Time	Mass Concentration ( $\mu\text{g}/\text{m}^3$ )
04-Jun-19	Cloudy	8:02	14.3
04-Jun-19	Cloudy	9:03	24.6
04-Jun-19	Cloudy	10:04	16.5
10-Jun-19	Cloudy	8:25	32.6
10-Jun-19	Cloudy	9:26	13.9
10-Jun-19	Cloudy	10:27	12.4
15-Jun-19	Cloudy	08:00	27.8
15-Jun-19	Cloudy	09:01	22.7
15-Jun-19	Cloudy	10:02	31.5
21-Jun-19	Fine	08:00	8.4
21-Jun-19	Fine	09:01	8.4
21-Jun-19	Fine	10:02	8.9
27-Jun-19	Cloudy	8:36	21.2
27-Jun-19	Cloudy	9:37	22.3
27-Jun-19	Cloudy	10:38	14.1



Report on 1-hour TSP monitoring at LTR\_AMS-1 - St Edward's Catholic Primary School

Action Level ( $\mu\text{g}/\text{m}^3$ ) - 272.1  
Limit Level ( $\mu\text{g}/\text{m}^3$ ) - 500.0

Date	Weather Condition	Time	Mass Concentration ( $\mu\text{g}/\text{m}^3$ )
04-Jun-19	Cloudy	13:13	20.7
04-Jun-19	Cloudy	14:14	20.1
04-Jun-19	Cloudy	15:15	20.4
10-Jun-19	Cloudy	8:19	12.4
10-Jun-19	Cloudy	9:20	12.6
10-Jun-19	Cloudy	10:21	12.7
15-Jun-19	Cloudy	13:12	29.2
15-Jun-19	Cloudy	14:13	36.0
15-Jun-19	Cloudy	15:14	37.1
21-Jun-19	Fine	9:22	13.2
21-Jun-19	Fine	10:23	10.3
21-Jun-19	Fine	13:00	9.4
27-Jun-19	Cloudy	13:01	22.6
27-Jun-19	Cloudy	14:02	16.6
27-Jun-19	Cloudy	15:03	16.3



Report on 1-hour TSP monitoring at LTR\_AMS-2 - Environmental Protection  
Department's Restored Landfill Site Office  
Action Level ( $\mu\text{g}/\text{m}^3$ ) - 281.1  
Limit Level ( $\mu\text{g}/\text{m}^3$ ) - 500.0

Date	Weather Condition	Time	Mass Concentration ( $\mu\text{g}/\text{m}^3$ )
04-Jun-19	Cloudy	13:00	14.3
04-Jun-19	Cloudy	14:01	12.5
04-Jun-19	Cloudy	15:02	11.9
10-Jun-19	Cloudy	8:04	6.5
10-Jun-19	Cloudy	9:05	4.9
10-Jun-19	Cloudy	10:06	2.3
15-Jun-19	Cloudy	13:00	26.7
15-Jun-19	Cloudy	14:01	24.8
15-Jun-19	Cloudy	15:02	24.6
21-Jun-19	Fine	9:33	61.5
21-Jun-19	Fine	10:34	45.2
21-Jun-19	Fine	13:00	46.5
27-Jun-19	Cloudy	13:00	23.9
27-Jun-19	Cloudy	14:01	18.1
27-Jun-19	Cloudy	15:02	14.9





Report on 1-hour TSP monitoring at LTR\_AMS-3 - Po Tat Estate Tat Kai House

Action Level ( $\mu\text{g}/\text{m}^3$ ) - 285.1  
Limit Level ( $\mu\text{g}/\text{m}^3$ ) - 500.0

Date	Weather Condition	Time	Mass Concentration ( $\mu\text{g}/\text{m}^3$ )
04-Jun-19	Cloudy	13:00	13.6
04-Jun-19	Cloudy	14:01	11.7
04-Jun-19	Cloudy	15:02	10.8
10-Jun-19	Cloudy	8:02	12.1
10-Jun-19	Cloudy	9:03	9.2
10-Jun-19	Cloudy	10:04	4.4
15-Jun-19	Cloudy	13:17	27.1
15-Jun-19	Cloudy	14:18	22.7
15-Jun-19	Cloudy	15:19	22.8
21-Jun-19	Fine	9:14	16.3
21-Jun-19	Fine	10:15	17.5
21-Jun-19	Fine	13:00	14.3
27-Jun-19	Cloudy	13:11	19.2
27-Jun-19	Cloudy	14:12	14.1
27-Jun-19	Cloudy	15:13	11.7





Graphic Presentation of TSP Result

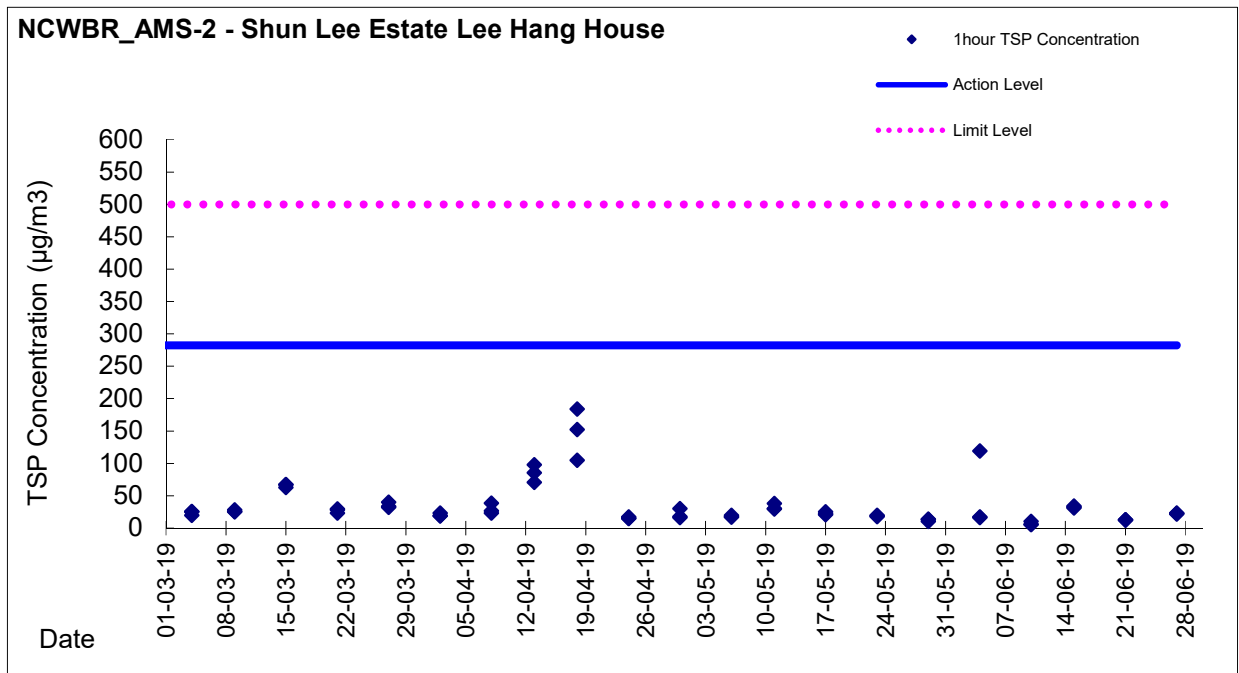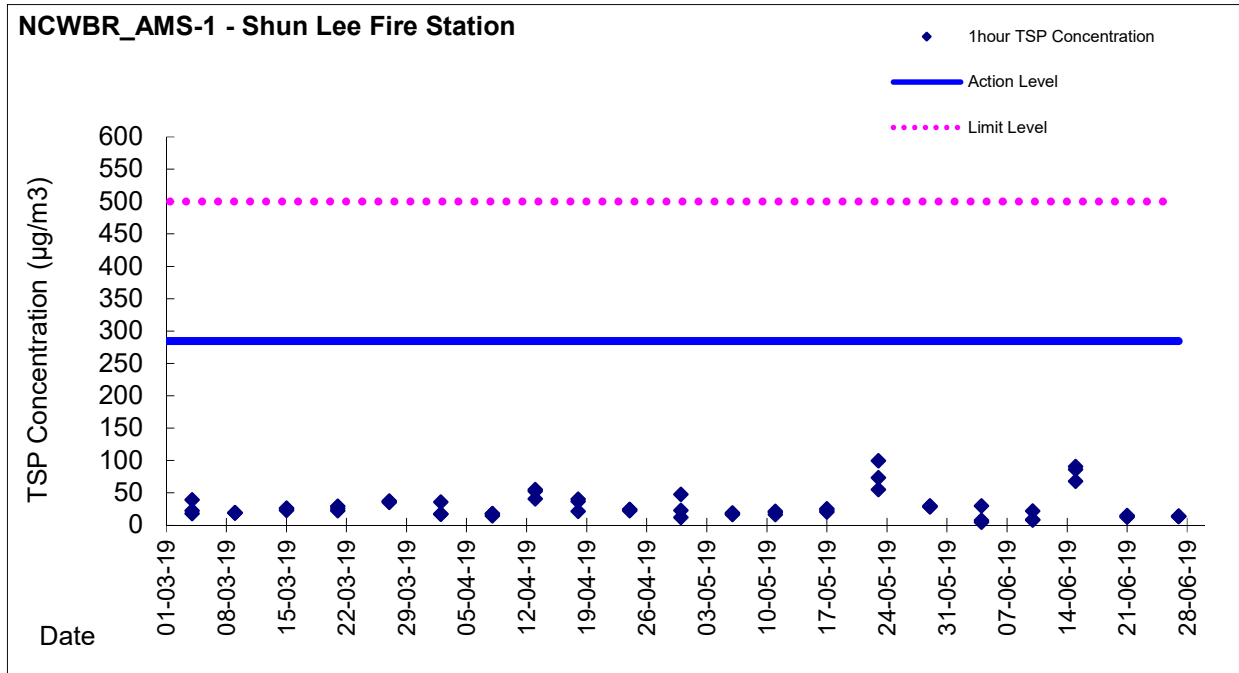







Graphic Presentation of TSP Result

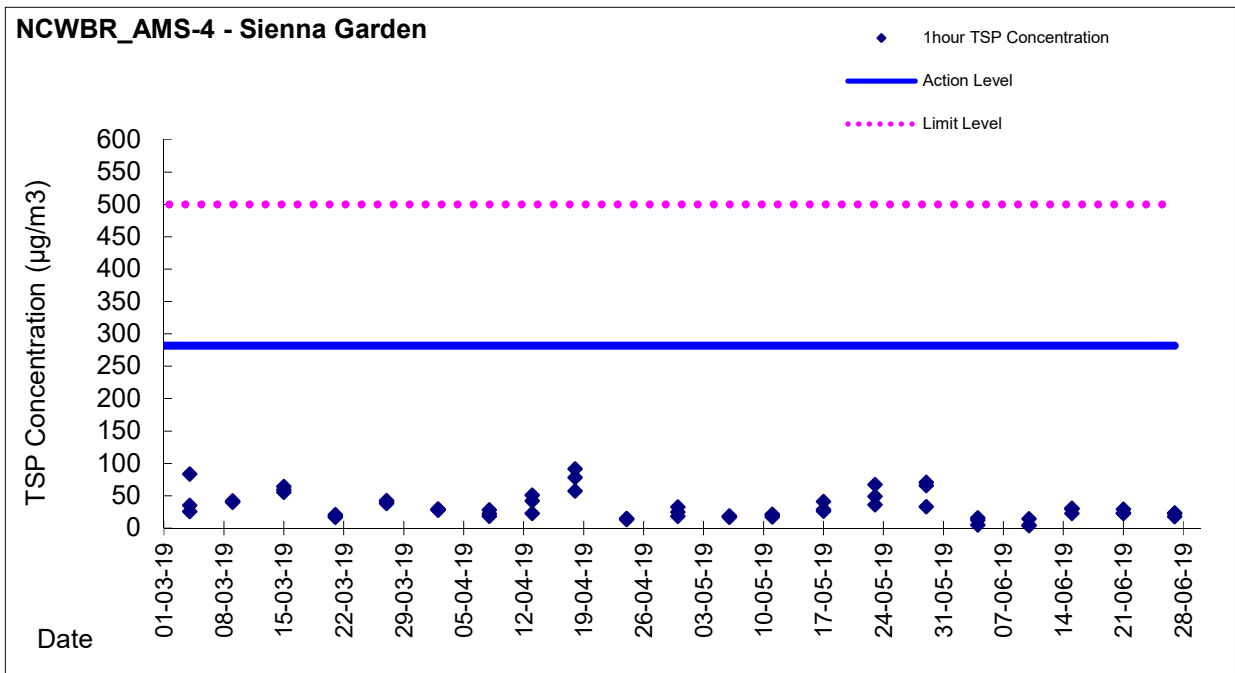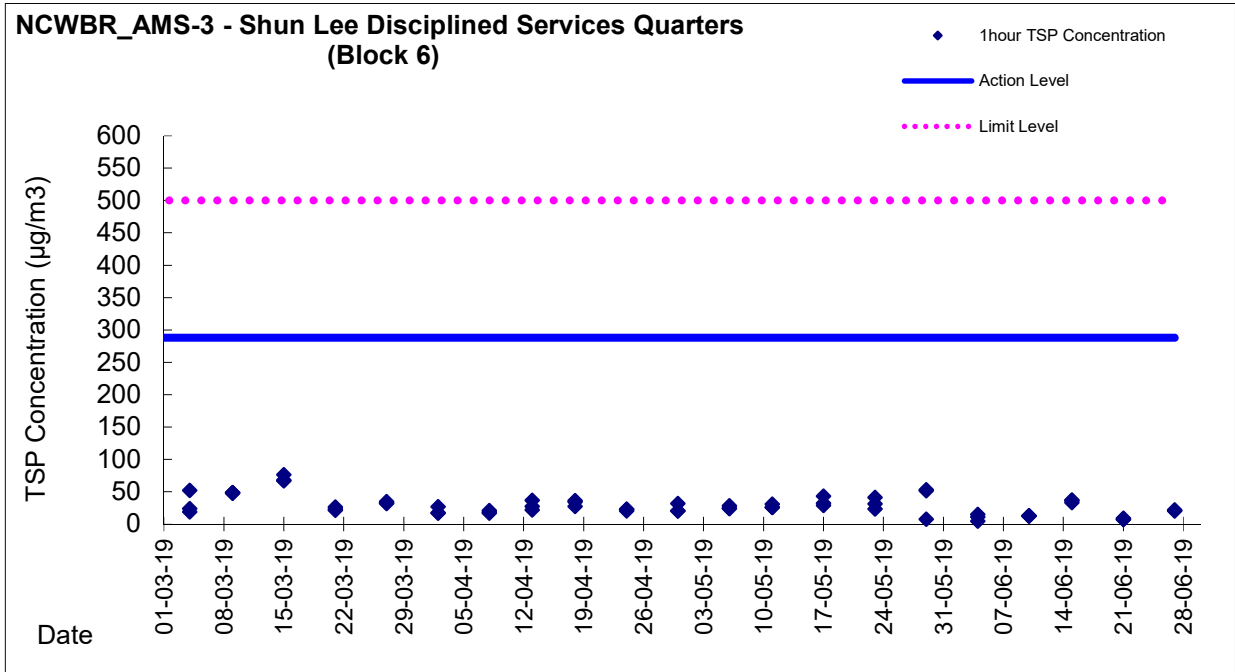





Graphic Presentation of TSP Result

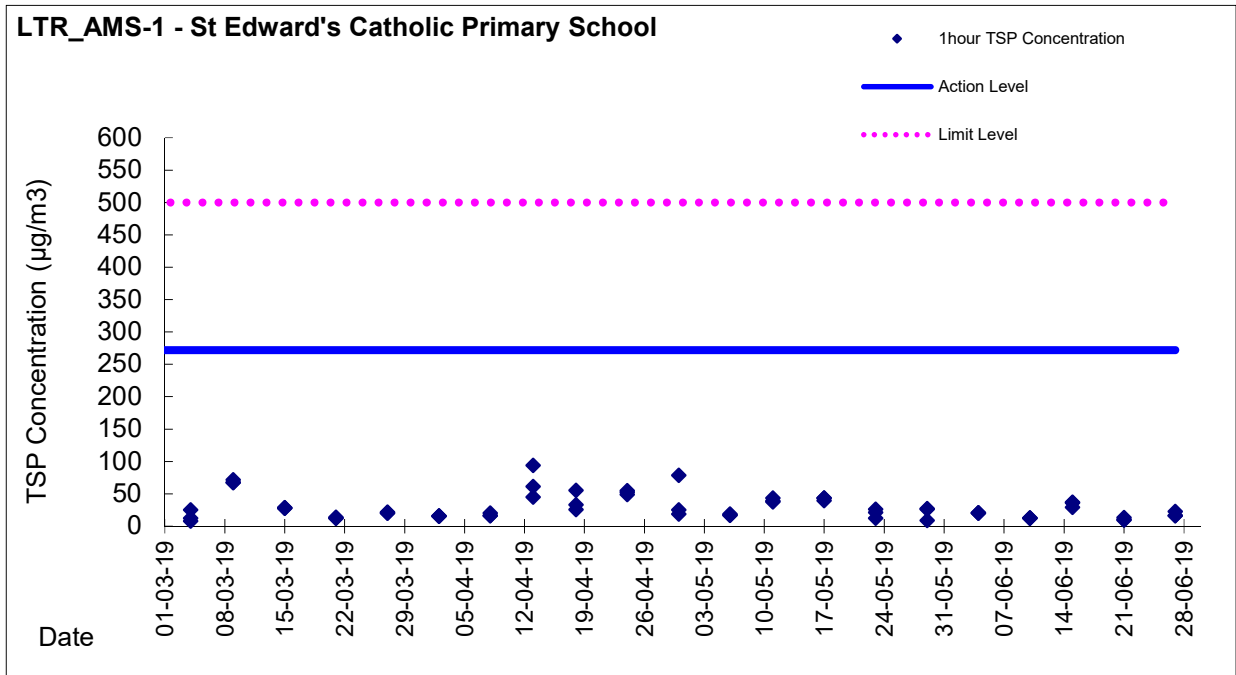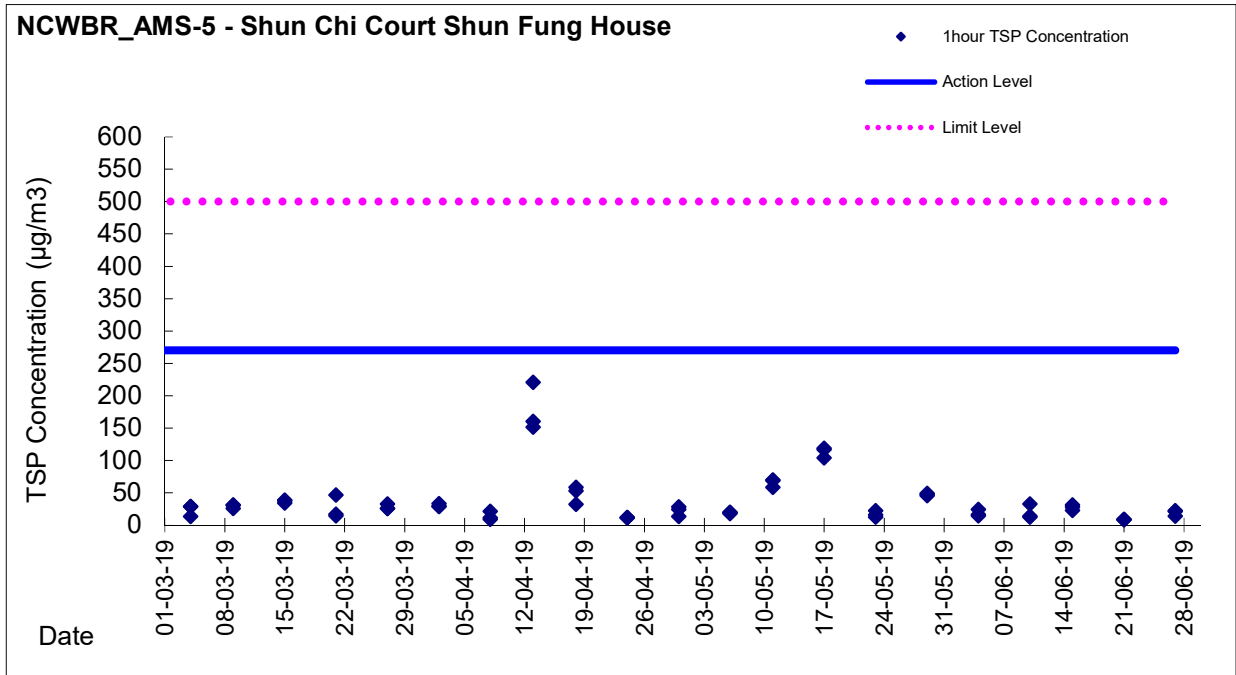



Graphic Presentation of TSP Result

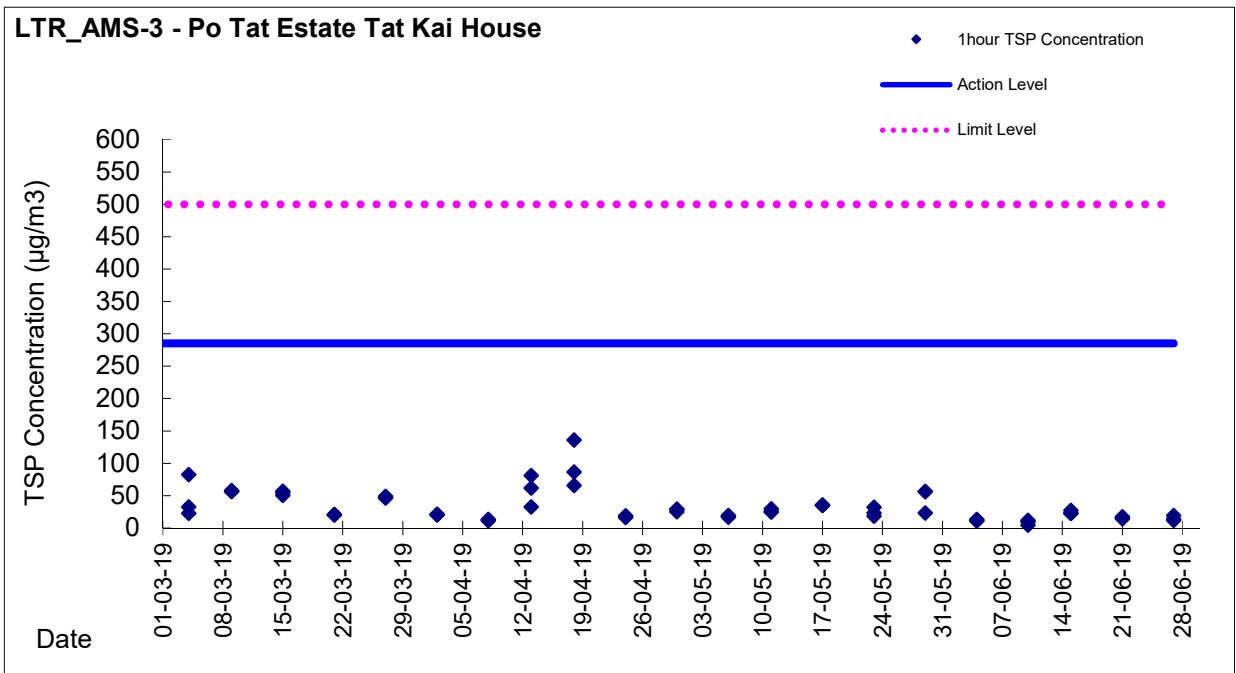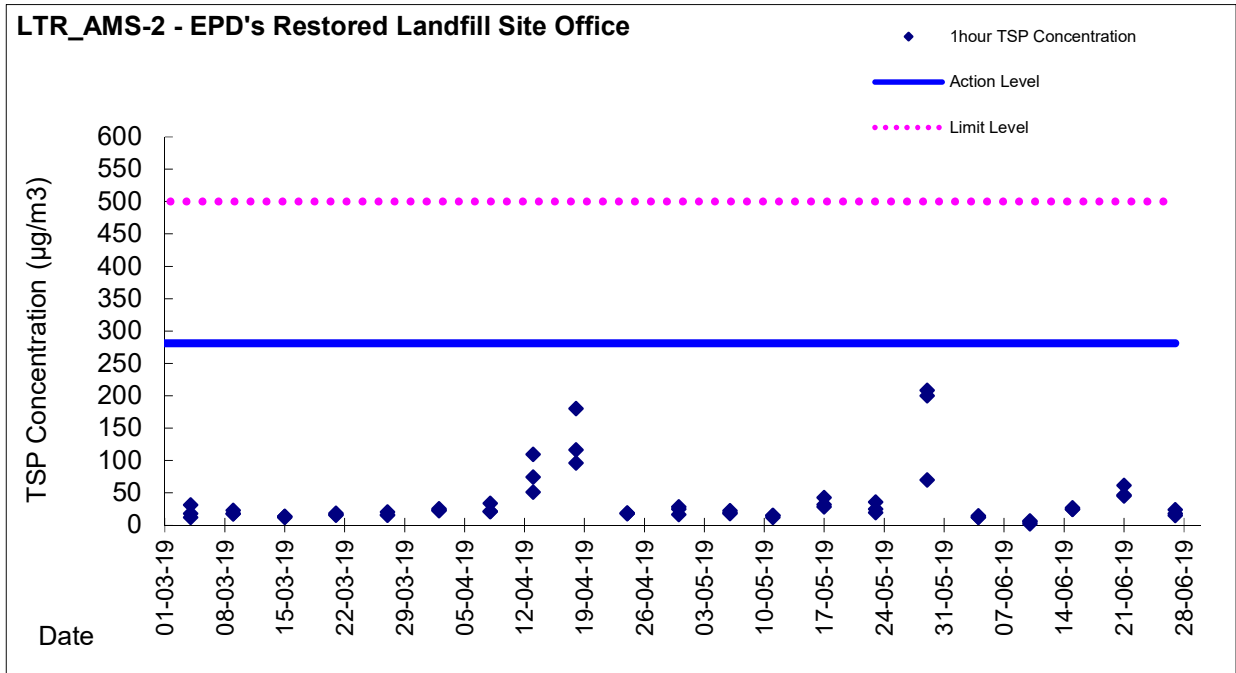



***Appendix 5.4***

***Water Quality Monitoring Results and Graphical Presentations***



**Water Monitoring Result at Monitoring Station E - Channelized nullah across the Project site (Upstream Control Station)**

Date	Time	Weater Condition	Sampling Depth m	Water Temperature °C			pH			Salinity ppt			DO Saturation %			DO mg/L			Turbidity NTU			Suspended Solids mg/L	
				Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Average
03-06-19	12:15	Cloudy	Surface	24.90	24.90	25.10	7.80	7.80	7.8	0.33	0.33	0.33	99.8	100.6	100.13	8.19	8.26	8.2	10.43	10.39	10.4	6.8	6.9
	12:17			25.30	25.30		7.80	7.80		0.33	0.33		100.2	99.9		8.22	8.20		10.43	10.36		7.0	
05-06-19	8:20	Fine	Surface	24.10	24.10	24.30	8.03	8.03	8.0	0.48	0.48	0.49	100.6	100.6	100.13	8.39	8.39	8.3	8.52	8.42	8.5	5.2	5.3
	8:22			24.50	24.50		7.99	7.99		0.49	0.49		99.5	99.8		8.27	8.29		8.47	8.50		5.4	
08-06-19	9:40	Fine	Surface	25.60	25.60	25.60	8.15	8.15	8.1	0.21	0.21	0.21	99.6	99.3	98.58	8.16	8.13	8.0	7.70	7.75	7.7	2.8	2.8
	9:42			25.60	25.60		8.13	8.13		0.20	0.20		97.6	97.8		7.95	7.92		7.73	7.73		2.7	
10-06-19	15:10	Cloudy	Surface	26.20	26.20	26.35	8.08	8.08	8.0	0.05	0.05	0.05	96.0	96.3	96.08	7.72	7.74	7.7	8.11	8.12	8.1	5.4	5.3
	15:12			26.50	26.50		8.01	8.01		0.05	0.05		95.9	96.1		7.70	7.71		8.10	8.10		5.1	
12-06-19	14:15	Cloudy	Surface	24.50	24.50	24.70	7.64	7.64	7.6	0.14	0.14	0.14	97.3	95.4	95.85	8.07	7.91	7.9	10.44	10.45	10.4	4.4	4.0
	14:17			24.90	24.90		7.62	7.62		0.14	0.14		95.3	95.4		7.90	7.90		10.35	10.37		3.6	
14-06-19	15:58	Fine	Surface	24.70	24.70	24.80	6.38	6.40	6.4	0.02	0.02	0.02	97.3	94.6	95.75	8.06	7.83	7.9	9.17	9.17	9.2	6.3	6.1
	16:00			24.90	24.90		6.38	6.38		0.02	0.02		95.4	95.7		7.90	7.92		9.16	9.16		5.9	
17-06-19	9:50	Fine	Surface	24.90	24.90	25.00	8.19	8.19	8.2	0.25	0.25	0.26	99.3	98.4	98.48	8.19	8.11	8.1	7.12	7.08	7.1	2.5	2.5
	9:52			25.10	25.10		8.16	8.16		0.26	0.26		98.2	98.0		8.08	8.07		7.08	7.06		2.4	
19-06-19	9:25	Fine	Surface	24.90	24.90	25.10	8.38	8.38	8.4	0.25	0.25	0.26	98.3	98.0	97.75	8.08	8.06	8.0	8.57	8.56	8.6	6.5	6.6
	9:27			25.30	25.30		8.37	8.37		0.26	0.26		97.2	97.5		7.98	8.00		8.61	8.66		6.7	
21-06-19	11:40	Fine	Surface	26.00	26.00	26.10	8.44	8.44	8.4	0.04	0.04	0.04	89.7	90.3	89.70	7.26	7.31	7.3	9.12	9.12	9.2	7.2	6.9
	11:42			26.20	26.20		8.44	8.44		0.04	0.04		89.1	89.7		7.20	7.25		9.30	9.30		6.6	
24-06-19	8:55	Fine	Surface	26.10	26.10	26.15	8.18	8.18	8.2	0.57	0.57	0.59	93.5	92.4	92.63	7.54	7.45	7.5	9.15	9.14	9.1	2.6	2.8
	8:57			26.20	26.20		8.18	8.18		0.60	0.60		92.5	92.1		7.45	7.42		9.12	9.12		3.0	
26-06-19	10:55	Fine	Surface	25.50	25.50	25.50	7.68	7.68	7.7	0.33	0.33	0.33	104.4	103.4	103.28	8.48	8.40	8.4	10.63	10.63	10.6	3.0	2.9
	10:57			25.50	25.50		7.68	7.68		0.33	0.33		103.0	102.3		8.38	8.30		10.48	10.57		2.7	
28-06-19	12:42	Fine	Surface	27.70	27.70	28.05	6.67	6.67	6.7	0.07	0.07	0.08	86.3	91.8	90.20	6.74	7.13	7.0	5.24	5.24	5.2	4.3	4.3
	12:44			28.40	28.40		6.64	6.64		0.08	0.08		92.4	90.3		7.19	7.03		5.20	5.20		4.2	

**Remarks:**

Single underline denotes exceedance over Action Level.

Double underline denotes exceedance over Limit Level.

Upstream Monitoring Station (Monitoring Station E) would be taken as control reference for exceedance investigation only.



Water Monitoring Result at Monitoring Station F - Channelized nullah across the Project site (Downstream Impact Station)

Date	Time	Weater Condition	Sampling Depth m	Water Temperature °C			pH -			Salinity ppt			DO Saturation %			DO mg/L			Turbidity NTU			Suspended Solids mg/L	
				Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Average
03-06-19	12:30	Cloudy	Surface	24.10	24.10	24.15	7.79	7.79	7.8	0.06	0.06	0.06	99.2	99.2	98.78	8.31	8.31	8.3	15.95	15.91	16.0	13.8	14.1
	12:32			24.20	24.20		7.79	7.79		0.06	0.06		98.3	98.4		8.23	8.23		16.00	15.98		14.3	
05-06-19	8:40	Fine	Surface	24.50	24.50	24.60	7.89	7.89	7.9	0.06	0.06	0.06	100.4	100.5	99.73	8.34	8.35	8.3	6.06	6.05	6.1	4.3	4.4
	8:42			24.70	24.70		7.87	7.87		0.06	0.06		98.9	99.1		8.21	8.22		6.05	6.05		4.4	
08-06-19	9:55	Fine	Surface	25.50	25.50	25.60	8.13	8.17	8.1	0.08	0.08	0.08	97.9	98.5	98.10	7.98	8.03	8.0	9.40	9.40	9.4	4.5	4.4
	9:57			25.70	25.70		8.10	8.10		0.08	0.08		97.9	98.1		7.97	7.98		9.40	9.54		4.3	
10-06-19	15:20	Cloudy	Surface	26.10	26.10	26.10	7.50	7.50	7.5	0.07	0.07	0.07	94.5	94.8	94.78	7.64	7.67	7.7	181.50	181.70	181.6	149.0	148.0
	15:22			26.10	26.10		7.51	7.51		0.07	0.07		94.8	95.0		7.67	7.68		181.60	181.40		147.0	
12-06-19	14:30	Cloudy	Surface	25.30	25.30	25.35	7.31	7.31	7.3	0.05	0.05	0.05	96.6	96.7	96.13	7.93	7.93	7.9	8.94	8.96	8.9	3.2	3.3
	14:32			25.40	25.40		7.28	7.28		0.05	0.05		95.6	95.6		7.83	7.83		8.94	8.93		3.4	
14-06-19	16:28	Fine	Surface	24.70	24.70	24.80	10.34	10.34	10.4	0.17	0.17	0.17	98.7	98.8	98.20	8.18	8.18	8.1	54.06	54.06	54.1	52.5	52.7
	16:30			24.90	24.90		10.36	10.36		0.17	0.17		98.1	97.2		8.12	8.04		54.07	54.07		52.9	
17-06-19	10:00	Fine	Surface	24.20	24.20	24.25	7.45	7.45	7.4	0.05	0.05	0.06	96.4	96.7	96.45	8.07	8.09	8.1	6.28	6.27	6.2	3.6	3.7
	10:02			24.30	24.30		7.40	7.40		0.06	0.06		96.6	96.1		8.08	8.03		6.23	6.21		3.7	
19-06-19	9:30	Fine	Surface	25.60	25.60	25.60	7.77	7.77	7.8	0.09	0.09	0.09	94.8	94.4	95.03	7.74	7.70	7.8	10.91	10.88	10.9	7.7	7.9
	9:32			25.60	25.60		7.78	7.78		0.09	0.09		95.7	95.2		7.81	7.77		10.87	10.87		8.1	
21-06-19	11:20	Fine	Surface	26.60	26.60	26.75	8.45	8.45	8.5	0.49	0.49	0.50	87.9	90.1	89.35	7.23	7.23	7.2	13.06	13.09	13.1	3.1	2.8
	11:22			26.90	26.90		8.45	8.45		0.50	0.50		90.2	89.2		7.19	7.11		13.10	13.11		2.5	
24-06-19	9:00	Fine	Surface	26.60	26.60	26.65	7.98	7.98	8.0	1.91	1.91	1.92	89.5	90.0	90.05	7.14	7.19	7.2	6.46	6.47	6.5	1.6	1.7
	9:02			26.70	26.70		7.94	7.94		1.93	1.93		89.9	90.8		7.18	7.23		6.45	6.43		1.8	
26-06-19	10:05	Fine	Surface	25.90	25.90	25.95	7.35	7.35	7.3	0.06	0.06	0.06	101.1	101.5	101.15	8.20	8.23	8.2	17.40	17.40	17.4	3.6	3.6
	10:07			26.00	26.00		7.31	7.31		0.06	0.06		100.9	101.1		8.17	8.19		17.40	17.41		3.6	
28-06-19	13:28	Fine	Surface	27.90	27.90	28.00	7.46	7.46	7.5	0.06	0.06	0.06	97.1	97.6	97.63	7.85	7.92	7.9	14.59	14.59	14.6	5.2	5.0
	13:30			28.10	28.10		7.47	7.47		0.06	0.06		97.8	98.0		7.94	7.96		14.63	14.64		4.8	

Remarks:  
 Single underline denotes exceedance over Action Level.  
 Double underline denotes exceedance over Limit Level.



Water Monitoring Result at Monitoring Station H - Ma Yau Tong Stream (Upstream Control Station)

Date	Time	Weather Condition	Sampling Depth m	Water Temperature °C			pH			Salinity ppt			DO Saturation %			DO mg/L			Turbidity NTU			Suspended Solids mg/L		
				Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average
03-06-19	12:45	Cloudy	Surface	25.20	25.20	25.20	7.44	7.44	7.4	0.14	0.14	0.14	100.0	100.2	99.70	8.23	8.24	8.2	108.10	108.40	108.4	84.3	83.9	
	12:47			25.20	25.20		7.42	7.42		0.14	0.14		99.5	99.1		8.18	8.15		108.50	108.50		83.5		
05-06-19	9:30	Fine	Surface	25.30	25.30	25.45	7.37	7.37	7.4	0.16	0.16	0.16	99.4	99.7	99.28	8.34	8.35	8.3	41.20	41.11	41.2	30.4	30.1	
	9:32			25.60	25.60		7.37	7.37		0.16	0.16		99.4	98.6		8.21	8.22		41.14	41.15		29.8		
08-06-19	10:30	Fine	Surface	26.50	26.50	26.60	8.04	8.04	8.0	0.31	0.31	0.31	99.5	101.2	99.95	7.96	8.18	8.0	156.60	156.60	157.5	142.0	146.0	
	10:32			26.70	26.70		8.04	8.04		0.31	0.31		100.0	99.1		7.98	7.82		157.40	159.50		150.0		
10-06-19	14:30	Cloudy	Surface	27.20	27.20	27.35	8.03	8.03	8.0	0.76	0.76	0.76	107.7	101.4	101.60	8.08	7.96	7.9	32.64	32.62	32.6	21.6	21.9	
	14:37			27.50	27.50		8.02	8.02		0.76	0.76		99.2	98.1		7.80	7.71		32.67	32.64		22.2		
12-06-19	13:50	Cloudy	Surface	26.70	26.70	26.60	7.91	7.91	7.9	0.17	0.17	0.18	95.2	95.2	94.63	7.65	7.64	7.6	112.90	113.30	114.0	94.2	94.7	
	13:52			26.50	26.50		7.89	7.89		0.18	0.18		94.0	94.1		7.54	7.54		114.70	114.90		95.2		
14-06-19	14:22	Fine	Surface	27.20	27.20	27.20	7.36	7.36	7.3	0.12	0.12	0.12	98.6	99.8	99.98	7.76	7.85	7.9	106.00	106.00	106.0	70.4	69.9	
	14:24			27.20	27.20		7.33	7.33		0.12	0.12		100.5	101.0		7.90	7.94		106.00	106.00		69.4		
17-06-19	11:00	Fine	Surface	25.30	25.30	25.30	7.21	7.21	7.2	0.21	0.21	0.21	98.3	98.1	97.78	8.07	8.05	8.0	20.95	20.97	21.0	18.2	18.0	
	11:02			25.30	25.30		7.21	7.21		0.21	0.21		97.3	97.4		7.99	7.99		21.00	21.04		17.8		
19-06-19	10:10	Fine	Surface	26.90	26.90	26.90	8.19	8.19	8.2	0.19	0.19	0.19	97.3	97.4	96.78	7.76	7.77	7.7	724.80	724.10	717.9	796.0	788.5	
	10:12			26.90	26.90		8.19	8.19		0.19	0.19		96.1	96.3		7.66	7.67		711.20	711.30		781.0		
21-06-19	14:55	Fine	Surface	28.90	28.90	29.20	8.27	8.27	8.3	0.23	0.23	0.23	93.1	94.5	93.93	7.27	7.21	7.2	39.77	39.77	39.8	50.0	50.7	
	14:57			29.50	29.50		8.29	8.29		0.23	0.23		93.9	94.2		7.16	7.18		39.88	39.88		51.3		
24-06-19	10:05	Fine	Surface	26.90	26.90	26.95	9.22	9.22	9.2	0.32	0.32	0.32	92.4	91.4	91.63	7.35	7.27	7.3	66.68	66.74	66.7	71.1	71.6	
	10:07			27.00	27.00		9.23	9.23		0.32	0.32		91.3	91.4		7.27	7.27		66.69	66.69		72.1		
26-06-19	12:40	Fine	Surface	26.90	26.90	88.80	7.32	7.32	7.3	0.23	0.23	0.23	106.0	105.4	105.83	8.38	8.28	8.3	70.15	70.16	70.1	44.0	44.2	
	12:42			27.20	274.20		7.28	7.28		0.23	0.23		106.0	105.9		8.38	8.35		70.18	70.10		44.4		
28-06-19	13:56	Fine	Surface	27.20	27.20	27.40	7.29	7.29	7.3	0.19	0.19	0.19	87.9	88.2	87.88	6.86	6.88	6.9	21.23	21.23	21.3	5.2	5.4	
	13:58			27.60	27.60		7.32	7.32		0.19	0.19		87.7	87.7		6.83	6.84		21.32	21.32		5.6		

Remarks:

Single underline denotes exceedance over Action Level.

Double underline denotes exceedance over Limit Level.

Upstream Monitoring Station (Monitoring Station H) would be taken as control reference for exceedance investigation only.



Water Monitoring Result at Monitoring Station I - Ma Yau Tong Stream (Downstream Impact Station)

Date	Time	Weater Condition	Sampling Depth m	Water Temperature °C			pH -			Salinity ppt			DO Saturation %			DO mg/L		Turbidity NTU		Suspended Solids mg/L			
				Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Average
03-06-19	13:10	Cloudy	Surface	25.10	25.10	25.15	7.27	7.27	7.3	0.23	0.23	0.23	103.5	103.0	101.80	8.51	8.48	8.4	31.03	31.14	31.1	25.6	25.4
	13:12			25.20	25.20		7.29	7.29		0.23	0.23		100.4	100.3		8.25	8.24		31.15	31.16		25.1	
05-06-19	9:55	Fine	Surface	26.00	26.00	26.10	7.29	7.29	7.3	0.17	0.17	0.17	99.1	99.6	98.90	8.01	8.05	8.0	142.40	142.40	142.4	177.0	<u>176.5</u>
	9:57			26.20	26.20		7.26	7.26		0.17	0.17		98.4	98.5		7.94	7.95		142.40	142.40		176.0	
08-06-19	10:50	Fine	Surface	26.80	26.80	26.85	7.59	7.59	7.6	0.21	0.21	0.21	101.5	101.7	100.93	8.15	8.16	8.1	49.09	49.12	49.1	45.0	46.4
	10:52			26.90	26.90		7.59	7.59		0.21	0.21		100.5	100.0		7.97	7.93		49.12	49.14		47.8	
10-06-19	15:40	Cloudy	Surface	27.20	27.20	27.15	7.55	7.55	7.5	0.20	0.20	0.20	100.6	100.6	99.75	8.00	8.00	7.9	18.60	18.61	18.6	13.8	14.0
	15:42			27.10	27.10		7.53	7.53		0.20	0.20		98.8	99.0		7.84	7.85		18.62	18.66		14.2	
12-06-19	13:30	Cloudy	Surface	26.50	26.50	26.55	8.16	8.16	8.2	0.42	0.42	0.43	99.5	99.1	98.43	7.96	7.94	7.9	55.65	55.35	55.5	32.5	33.3
	13:32			26.60	26.60		8.15	8.15		0.43	0.43		97.8	97.3		7.82	7.78		55.30	55.56		34.0	
14-06-19	14:52	Fine	Surface	27.80	27.80	27.90	7.05	7.05	7.1	0.11	0.11	0.11	101.0	100.2	100.45	7.91	7.85	7.9	46.01	46.01	45.9	20.7	26.9
	14:54			28.00	28.00		7.05	7.05		0.11	0.11		100.2	100.4		7.84	7.86		45.82	45.82		33.1	
17-06-19	11:30	Fine	Surface	25.60	25.60	25.65	7.33	7.33	7.3	0.21	0.21	0.22	97.5	97.4	96.45	7.94	7.93	7.9	15.33	15.31	15.3	11.8	12.0
	11:32			25.70	25.70		7.33	7.36		0.22	0.22		95.4	95.5		7.78	7.78		15.34	15.35		12.1	
19-06-19	10:35	Fine	Surface	27.00	27.00	27.10	8.16	8.16	8.2	0.19	0.19	0.19	96.3	97.3	94.80	7.64	7.71	7.7	195.30	194.80	194.8	157.0	157.5
	10:37			27.20	27.20		8.16	8.16		0.19	0.19		92.8	92.8		7.75	7.75		194.60	194.60		158.0	
21-06-19	15:47	Fine	Surface	28.60	28.60	28.75	7.31	7.31	7.3	0.19	0.19	0.19	94.4	94.3	94.13	7.28	7.26	7.3	15.94	15.94	15.9	8.2	8.3
	15:49			28.90	28.90		7.29	7.29		0.19	0.19		94.2	93.6		7.25	7.21		15.94	15.94		8.4	
24-06-19	10:30	Fine	Surface	27.30	27.30	27.30	8.27	8.27	8.3	0.22	0.22	0.22	95.7	96.5	95.95	7.58	7.64	7.6	19.64	19.68	19.7	7.5	7.7
	10:32			27.30	27.30		8.25	8.25		0.22	0.22		96.0	95.6		7.51	7.56		19.71	19.75		7.9	
26-06-19	13:00	Fine	Surface	27.10	27.10	27.15	7.22	7.22	7.2	0.14	0.14	0.14	106.8	106.7	105.83	8.48	8.46	8.4	33.02	33.02	33.0	13.9	13.8
	13:02			27.20	27.20		7.19	7.19		0.14	0.14		105.1	104.7		8.37	8.29		33.02	33.01		13.6	
28-06-19	14:21	Fine	Surface	26.90	26.90	27.00	7.68	7.68	7.7	0.17	0.17	0.17	96.9	96.9	97.08	7.84	7.85	7.9	18.25	18.25	18.3	5.7	5.5
	14:23			27.10	27.10		7.69	7.69		0.17	0.17		97.2	97.3		7.88	7.89		18.29	18.31		5.3	

Remarks:  
 Single underline denotes exceedance over Action Level.  
 Double underline denotes exceedance over Limit Level.





Water Monitoring Result at Monitoring Station AC1 - Channelized nullah across the Project site (Upstream Reference Station)

Date	Time	Weater Condition	Sampling Depth m	Water Temperature °C			pH			Salinity ppt			DO Saturation %			DO mg/L		Turbidity NTU		Suspended Solids mg/L			
				Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average	Value	Value	Average		
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
14-06-19	15:48	Fine	Surface	25.30	25.30	25.65	6.21	6.21	6.2	0.02	0.02	0.02	98.0	99.6	99.13	7.97	8.10	8.1	17.92	17.92	17.9	2.6	9.5
	15:50			26.00	26.00		6.21	6.22		0.02	0.02		99.9	99.0		8.12	8.04		17.92	17.92		16.3	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

Remarks:  
 Single underline denotes exceedance over Action Level.  
 Double underline denotes exceedance over Limit Level.  
 Upstream Monitoring Station (Monitoring Station AC1) would be taken as reference for exceedance investigation only.



**Water Monitoring Result at Monitoring Station AC2 - Channelized nullah across the Project site (Upstream Reference Station)**

Date	Time	Weather Condition	Sampling Depth m	Water Temperature °C		pH		Salinity ppt		DO Saturation %		DO mg/L		Turbidity NTU		Suspended Solids mg/L							
				Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average						
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
14-06-19	16:52	Fine	Surface	24.50	24.50	24.45	11.37	11.37	11.4	0.50	0.50	0.51	104.2	103.2	101.68	8.70	8.60	8.5	401.30	401.30	399.8	341.0	346.0
	16:54			24.40	24.40		11.39	11.39		0.51	0.51		101.0	98.3		8.42	8.19		398.20	398.20		351.0	
17-06-19	10:10	Fine	Surface	24.70	24.70	24.80	7.75	7.75	7.7	0.09	0.09	0.09	95.1	97.8	96.75	7.95	8.10	8.0	9.55	9.54	9.5	15.3	15.2
	10:12			24.90	24.90		7.69	7.69		0.09	0.09		97.0	97.1		8.03	8.04		9.50	9.47		15.0	
19-06-19	9:50	Fine	Surface	25.20	25.20	25.25	7.41	7.41	7.4	0.19	0.19	0.19	95.6	95.8	95.58	7.85	7.87	7.8	11.48	11.48	11.5	5.6	5.8
	9:52			25.30	25.30		7.41	7.41		0.19	0.19		95.8	95.1		7.84	7.81		11.48	11.48		5.9	
21-06-19	11:33	Fine	Surface	25.80	25.80	26.00	8.65	8.65	8.6	0.07	0.07	0.07	91.4	92.2	91.70	7.40	7.47	7.4	3.07	3.07	3.1	8.6	5.5
	11:35			26.20	26.20		8.57	8.57		0.07	0.07		92.0	91.2		7.45	7.38		3.07	3.07		2.4	
24-06-19	9:25	Fine	Surface	25.90	25.90	25.95	8.03	8.03	8.0	0.07	0.07	0.07	92.2	92.6	93.23	7.42	7.52	7.5	10.66	10.57	10.6	5.5	5.6
	9:27			26.00	26.00		8.00	8.00		0.07	0.07		93.9	94.2		7.61	7.63		10.66	10.60		5.6	
26-06-19	10:20	Fine	Surface	25.40	25.40	25.50	7.34	7.34	7.4	0.07	0.07	0.07	98.9	98.9	98.03	8.06	8.06	8.0	29.71	29.70	29.7	14.1	14.2
	10:22			25.60	25.60		7.40	7.40		0.07	0.07		97.1	97.2		7.91	7.94		29.72	29.72		14.3	
28-06-19	12:46	Fine	Surface	27.00	27.00	27.10	7.08	7.08	7.1	0.11	0.11	0.11	92.3	93.2	92.93	7.34	7.41	7.4	6.37	6.37	6.3	26.9	15.7
	12:48			27.20	27.20		7.10	7.10		0.11	0.11		93.5	92.7		7.43	7.36		6.31	6.31		4.4	

Remarks:  
 Single underline denotes exceedance over Action Level.  
 Double underline denotes exceedance over Limit Level.  
 Upstream Monitoring Station (Monitoring Station AC2) would be taken as reference for exceedance investigation only.



Water Monitoring Result at Monitoring Station AC3 - Channelized nullah across the Project site (Upstream Reference Station)


Date	Time	Weater Condition	Sampling Depth m	Water Temperature °C			pH			Salinity ppt			DO Saturation %			DO mg/L		Turbidity NTU		Suspended Solids mg/L			
				Value	Average		Value	Average		Value	Average		Value	Average		Value	Average	Value	Average	Value	Average		
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
14-06-19	16:20	Fine	Surface	24.90	24.90	25.05	6.90	6.90	6.9	0.03	0.03	0.03	94.7	96.4	96.23	7.83	7.96	7.9	15.67	15.68	15.5	8.0	7.8
	16:22			25.20	25.20		6.90	6.90		0.03	0.03		96.8	97.0		7.99	8.01		15.30	15.16		7.5	
17-06-19	10:15	Fine	Surface	24.20	24.20	24.25	7.25	7.25	7.3	0.05	0.05	0.05	99.5	99.2	98.98	8.33	8.31	8.3	11.25	11.09	11.1	8.6	8.8
	10:17			24.30	24.30		7.26	7.26		0.05	0.05		98.8	98.4		8.27	8.23		11.09	11.00		8.9	
19-06-19	9:35	Fine	Surface	25.20	25.20	25.35	7.53	7.53	7.5	0.06	0.06	0.06	94.3	94.7	94.20	7.75	7.78	7.7	14.68	14.68	14.7	8.2	8.0
	9:37			25.70	25.30		7.54	7.54		0.06	0.06		93.5	94.3		7.69	7.74		14.67	14.65		7.8	
21-06-19	11:25	Fine	Surface	26.30	26.30	26.35	8.50	8.50	8.5	0.08	0.08	0.09	91.0	90.9	91.85	7.33	7.33	7.4	7.16	7.03	7.0	3.6	3.6
	11:27			26.40	26.40		8.50	8.50		0.10	0.10		91.9	93.6		7.40	7.54		7.00	6.69		3.6	
24-06-19	9:10	Fine	Surface	26.30	26.30	26.35	8.27	8.27	8.2	0.09	0.09	0.09	88.8	89.4	89.33	7.16	7.20	7.2	8.35	8.33	8.3	3.0	3.2
	9:12			26.40	26.40		8.14	8.14		0.09	0.09		89.7	89.4		7.23	7.19		8.33	8.34		3.3	
26-06-19	10:15	Fine	Surface	26.20	26.20	26.25	7.07	7.07	7.1	0.05	0.05	0.05	106.7	106.0	104.88	8.55	8.50	8.4	10.70	10.71	10.7	4.0	4.2
	10:17			26.30	26.30		7.06	7.06		0.05	0.05		104.0	102.8		8.35	8.29		10.65	10.66		4.3	
28-06-19	13:22	Fine	Surface	27.30	27.30	27.40	7.11	7.11	7.1	0.06	0.06	0.06	96.7	96.9	96.80	7.86	7.88	7.9	8.71	8.71	8.7	4.6	4.7
	13:24			27.50	27.50		7.13	7.13		0.06	0.06		96.5	97.1		7.84	7.91		8.73	8.73		4.7	

Remarks:  
 Single underline denotes exceedance over Action Level.  
 Double underline denotes exceedance over Limit Level.  
 Upstream Monitoring Station (Monitoring Station AC3) would be taken as reference for exceedance investigation only.




Graphic Presentation of WQM Result

Station E - Channelized nullah across the Project site (Upstream Control Station) - pH


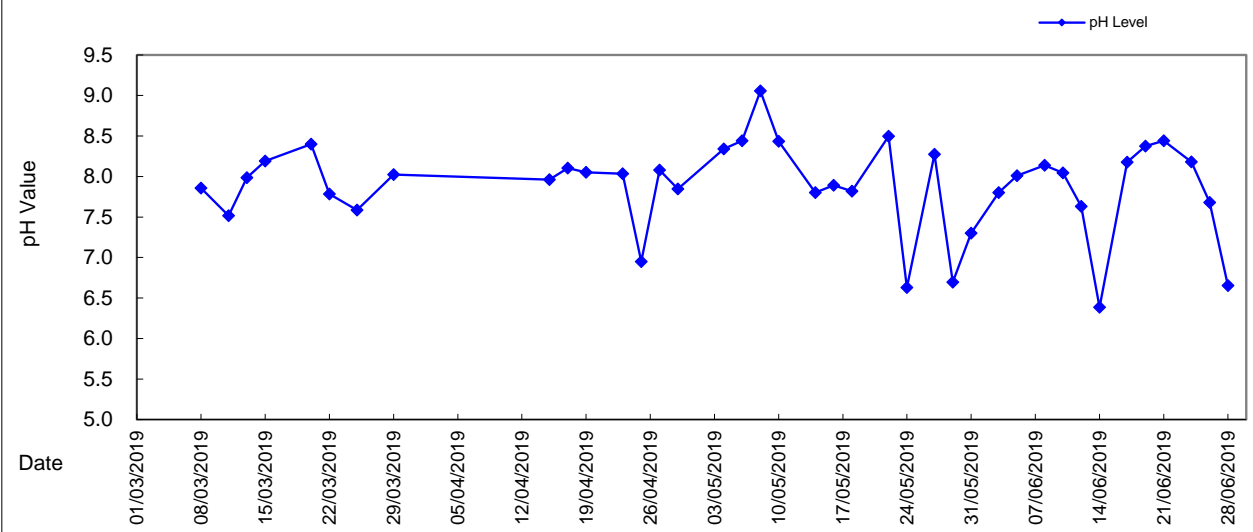


Station E - Channelized nullah across the Project site (Upstream Control Station) - DO

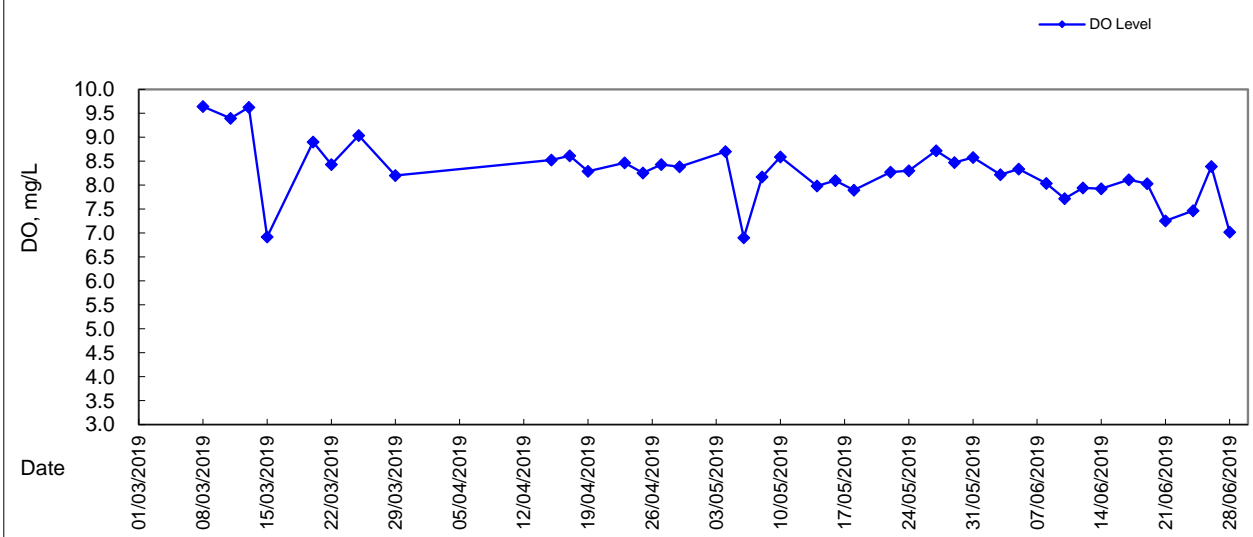





Graphic Presentation of WQM Result

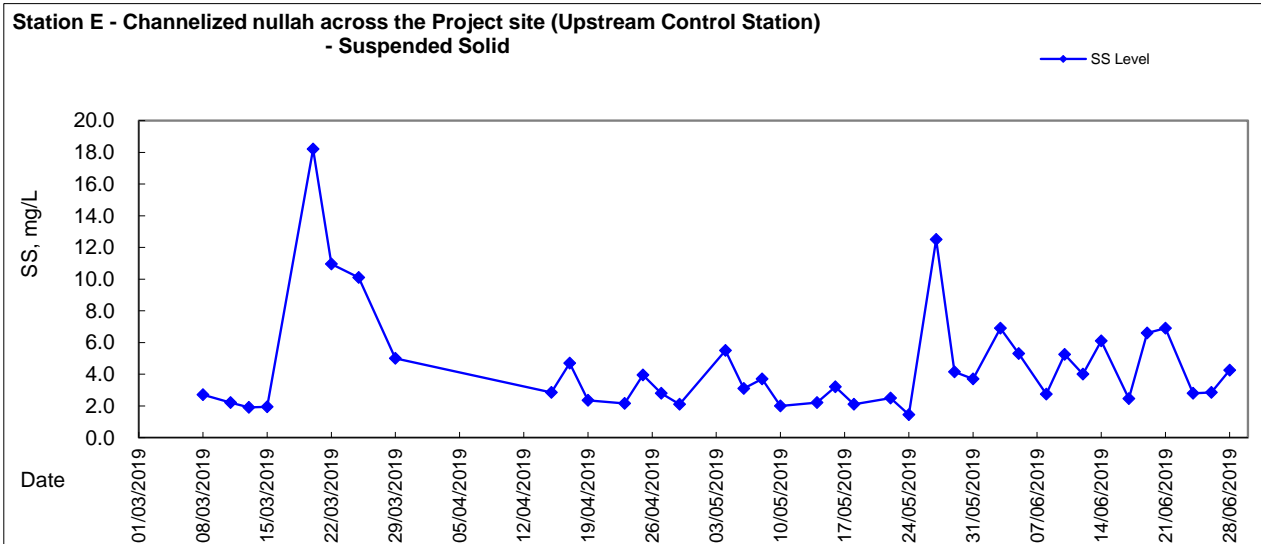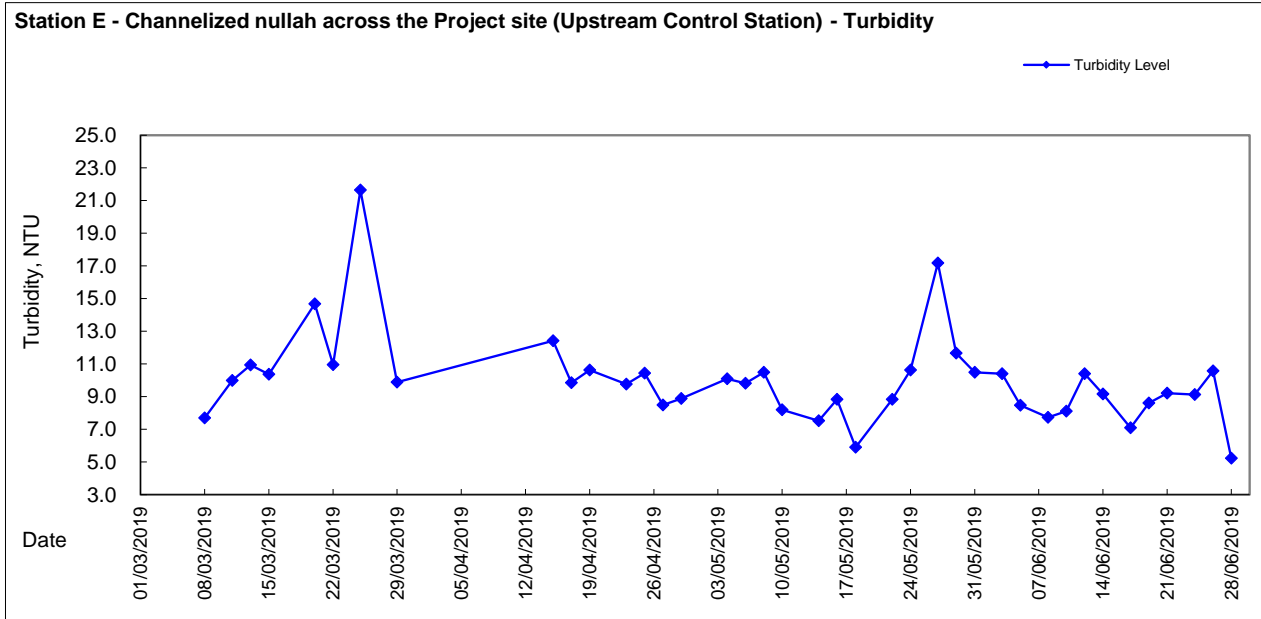





Graphic Presentation of WQM Result

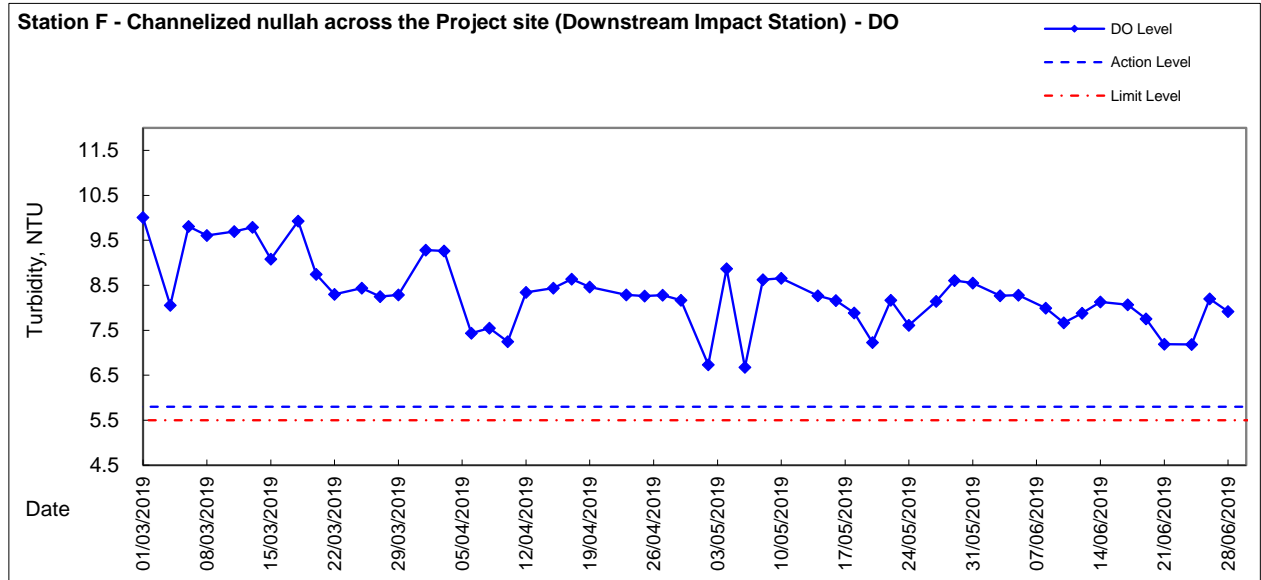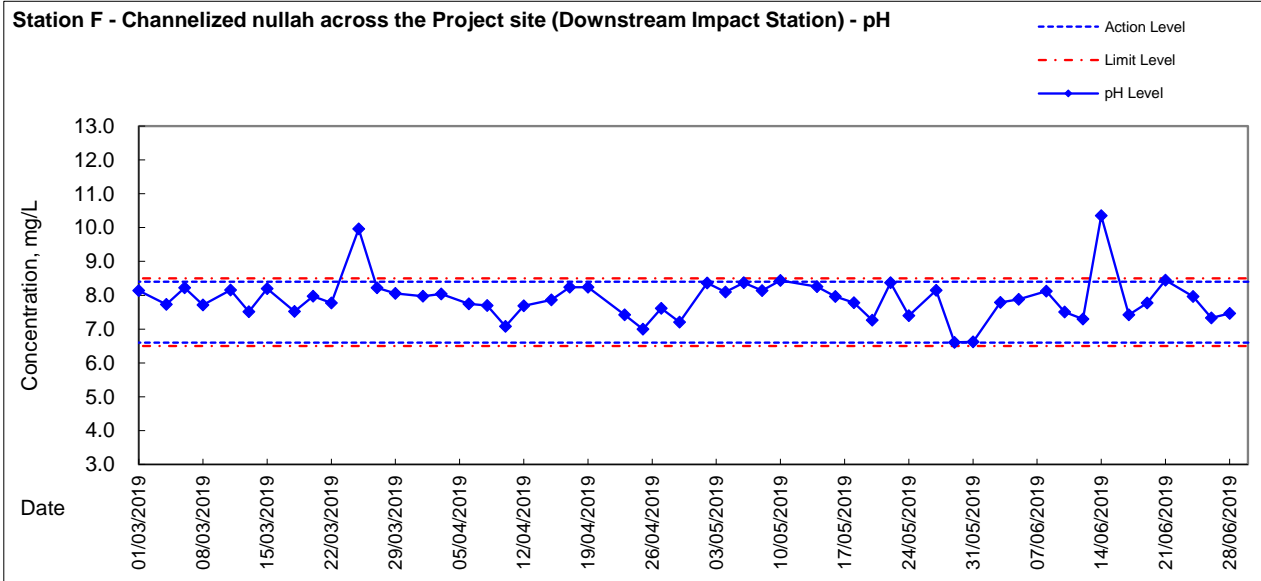





Graphic Presentation of WQM Result

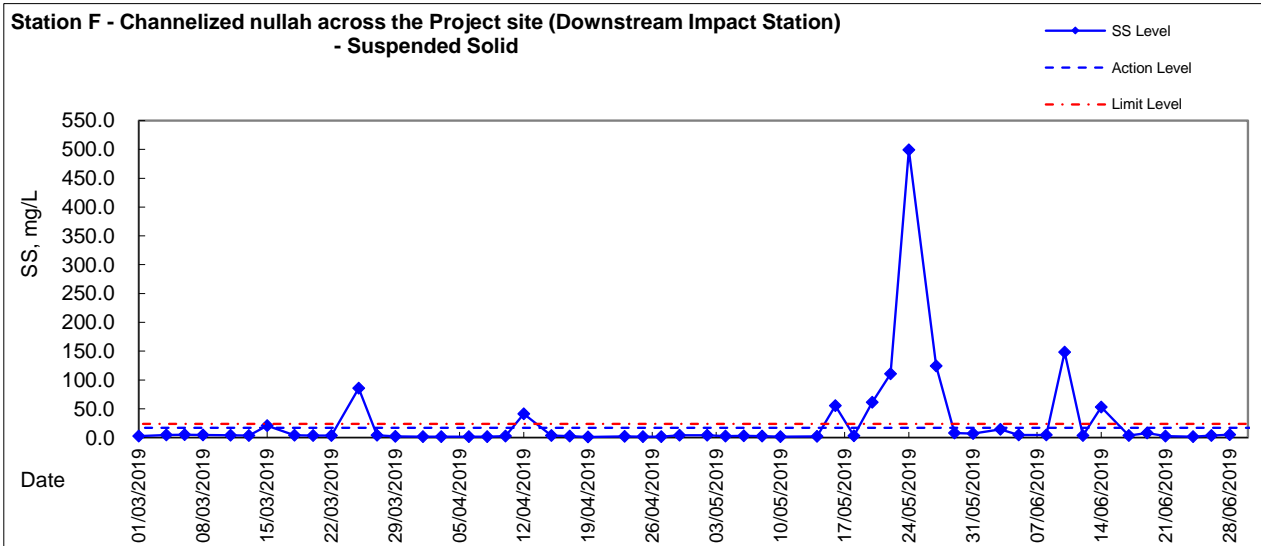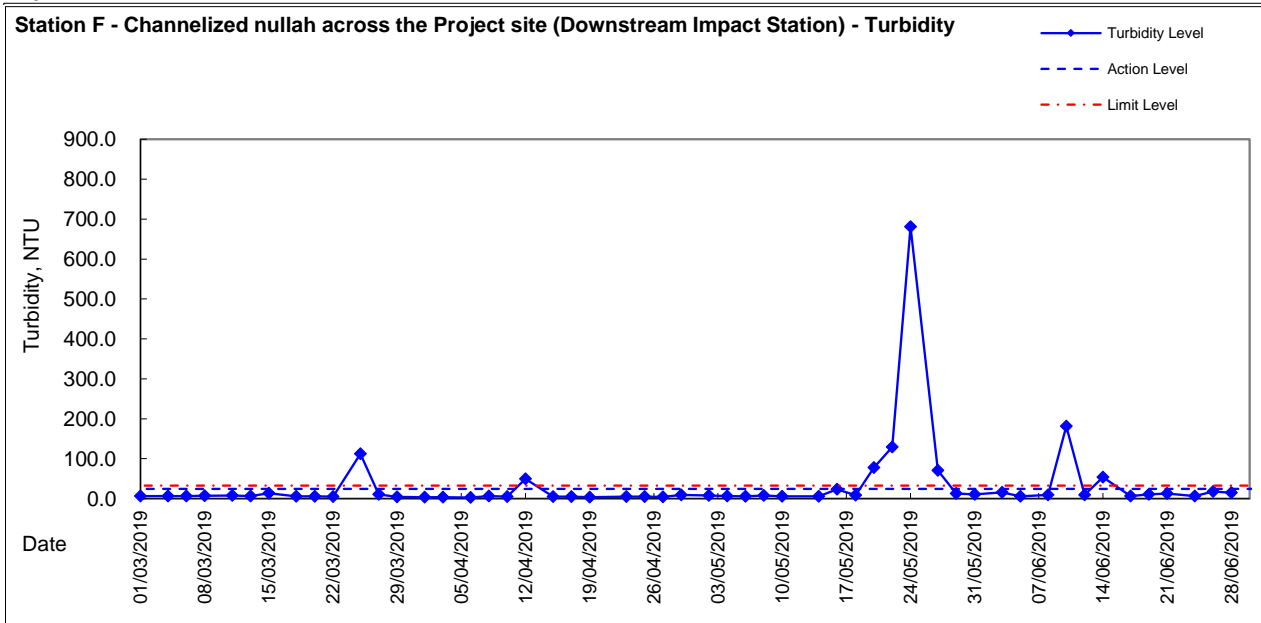





Graphic Presentation of WQM Result

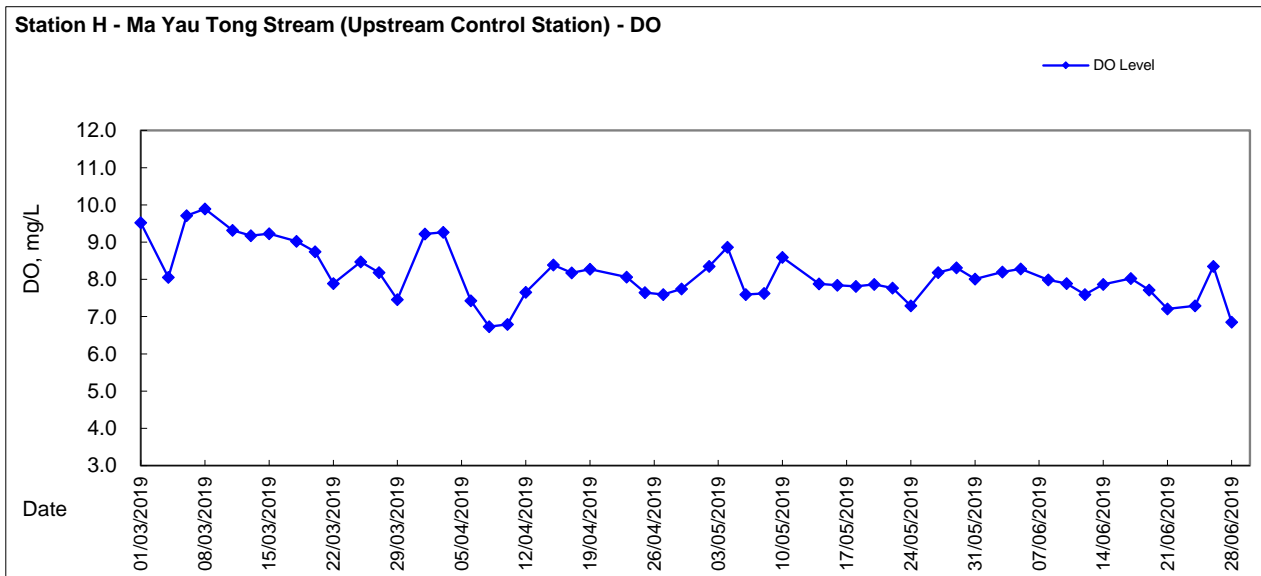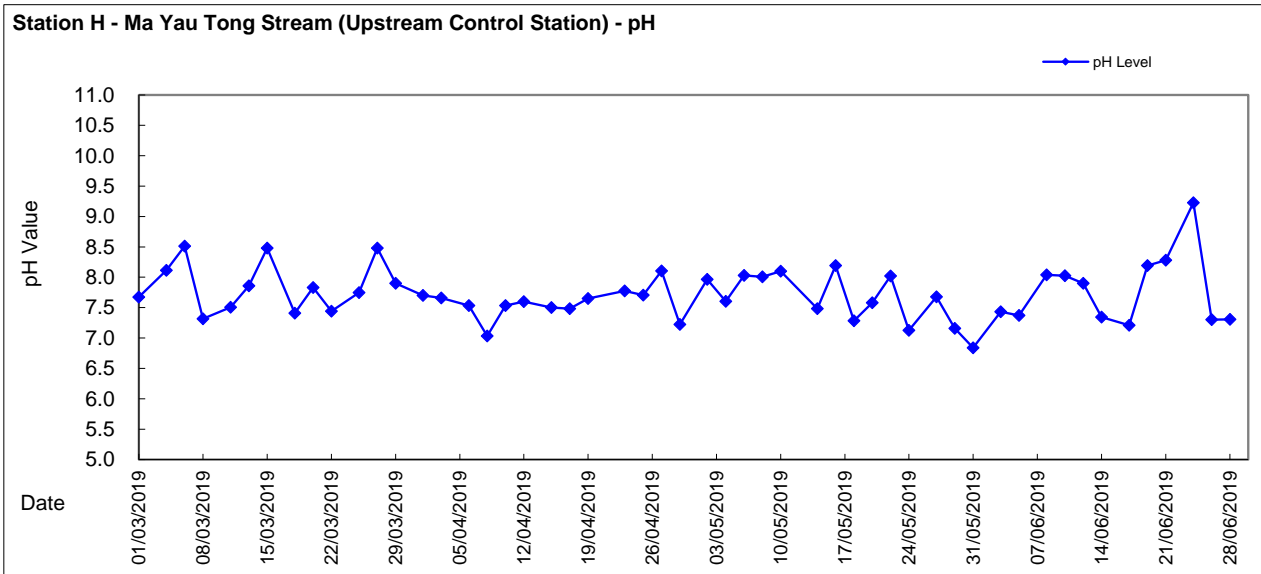







Graphic Presentation of WQM Result

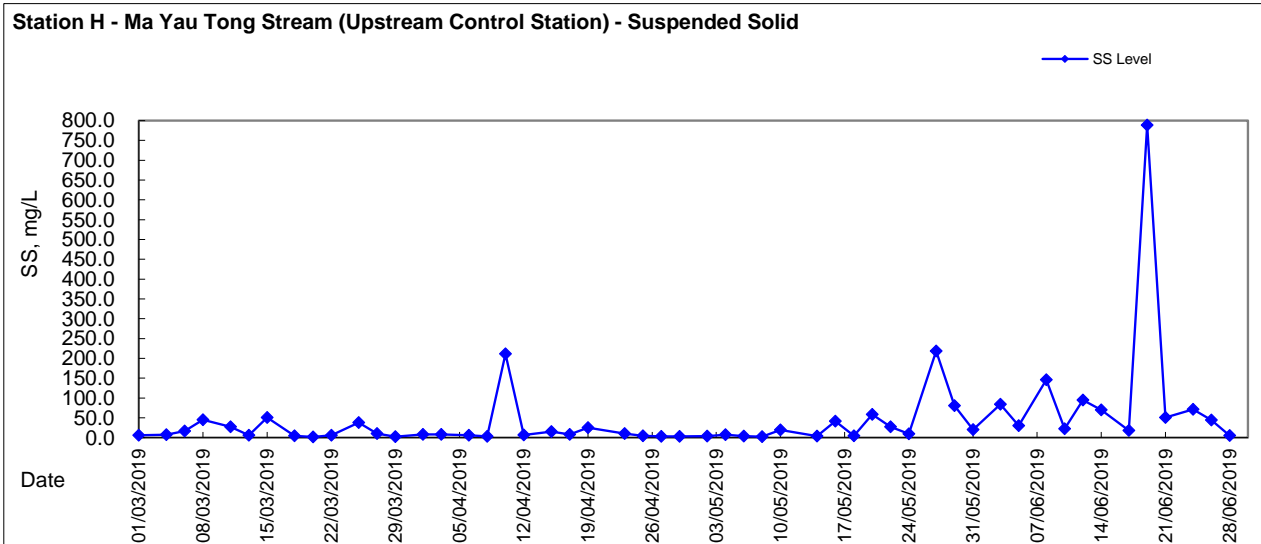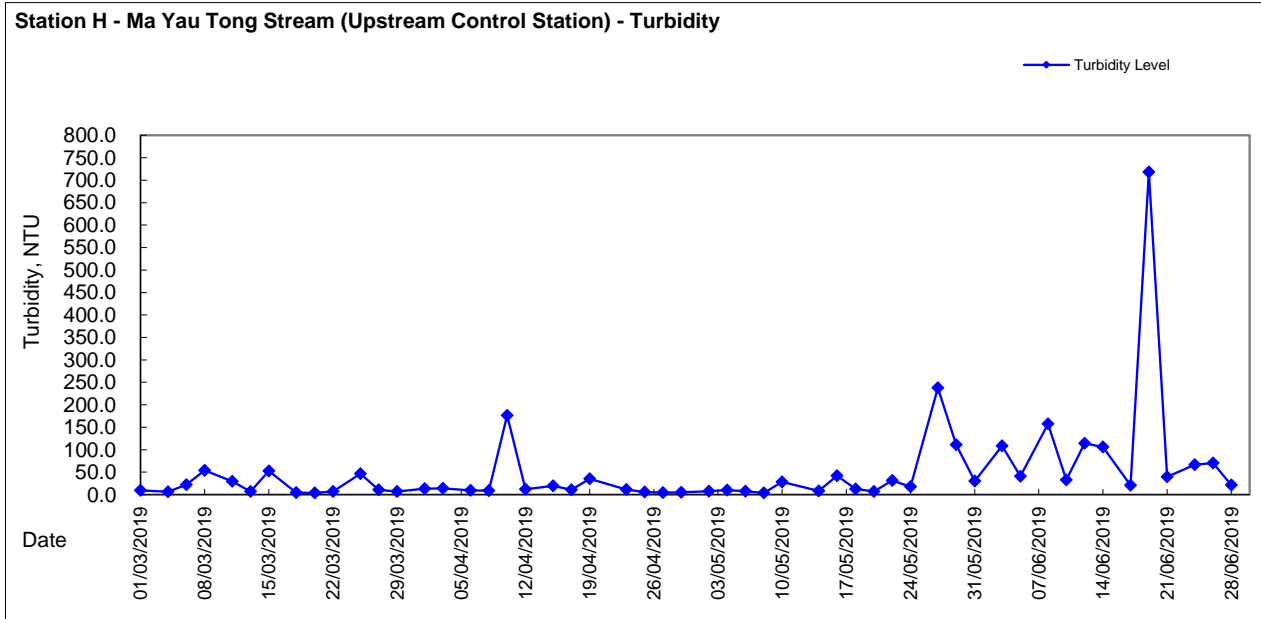





Graphic Presentation of WQM Result

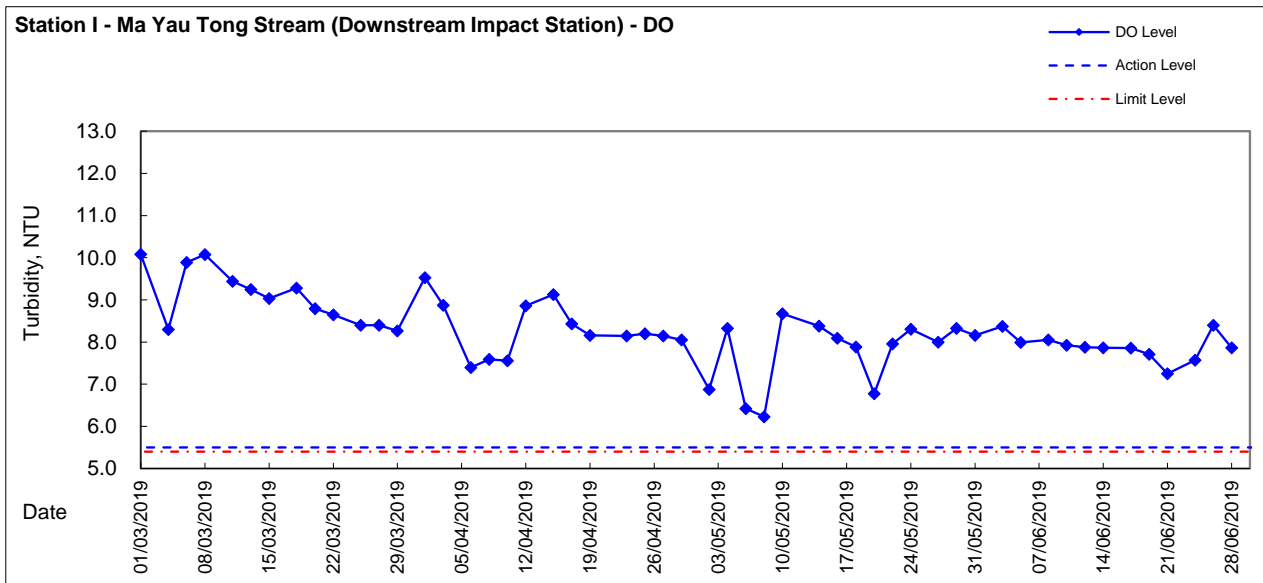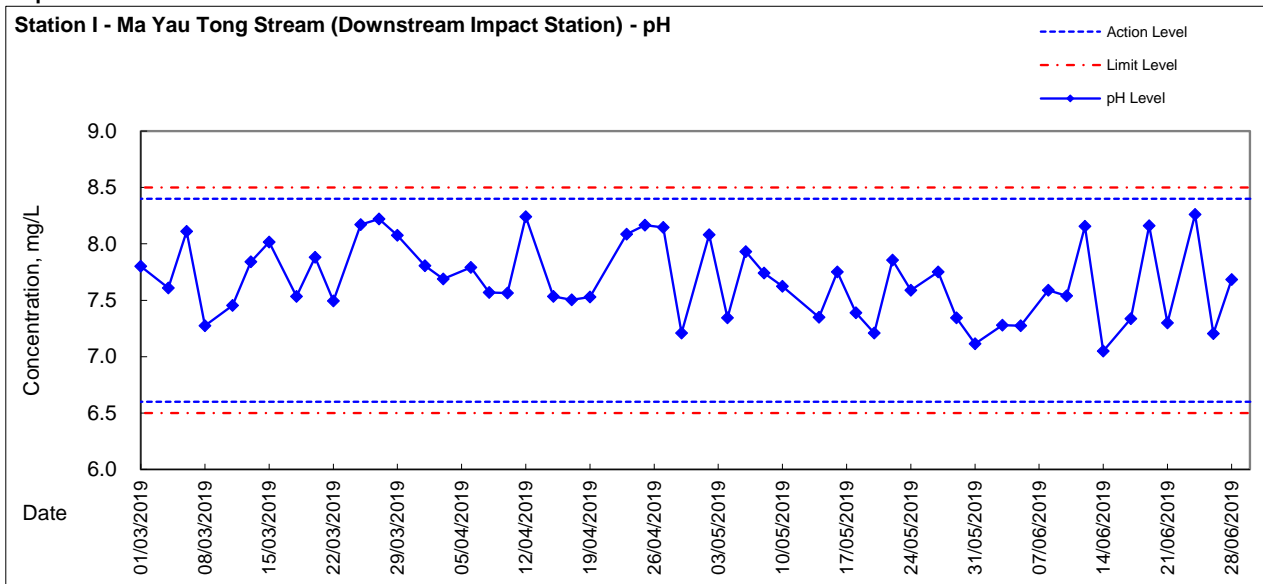





Graphic Presentation of WQM Result

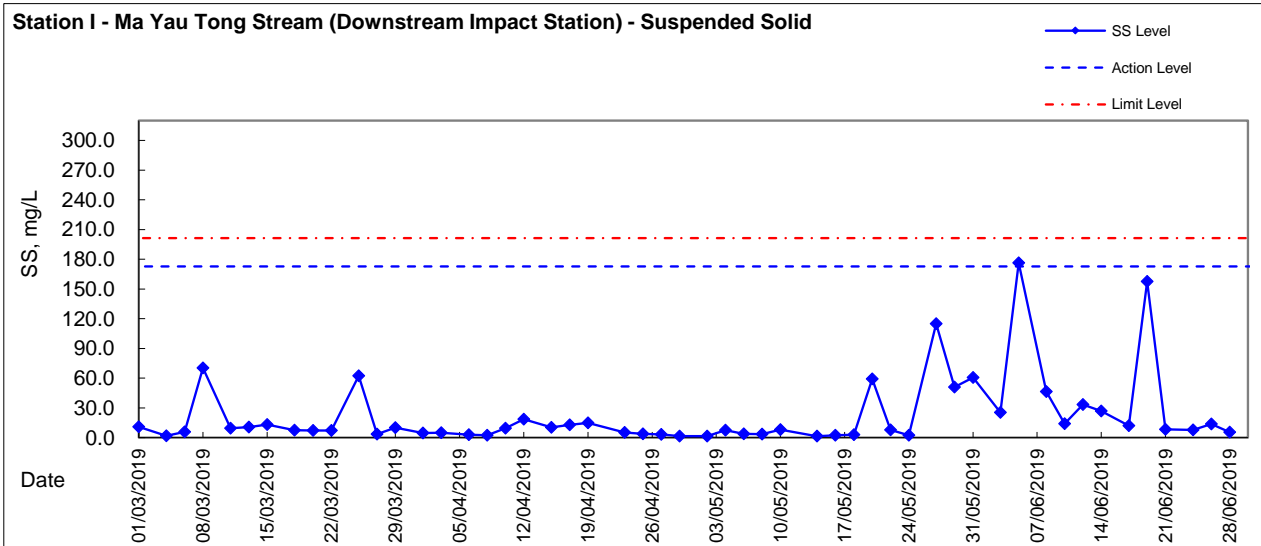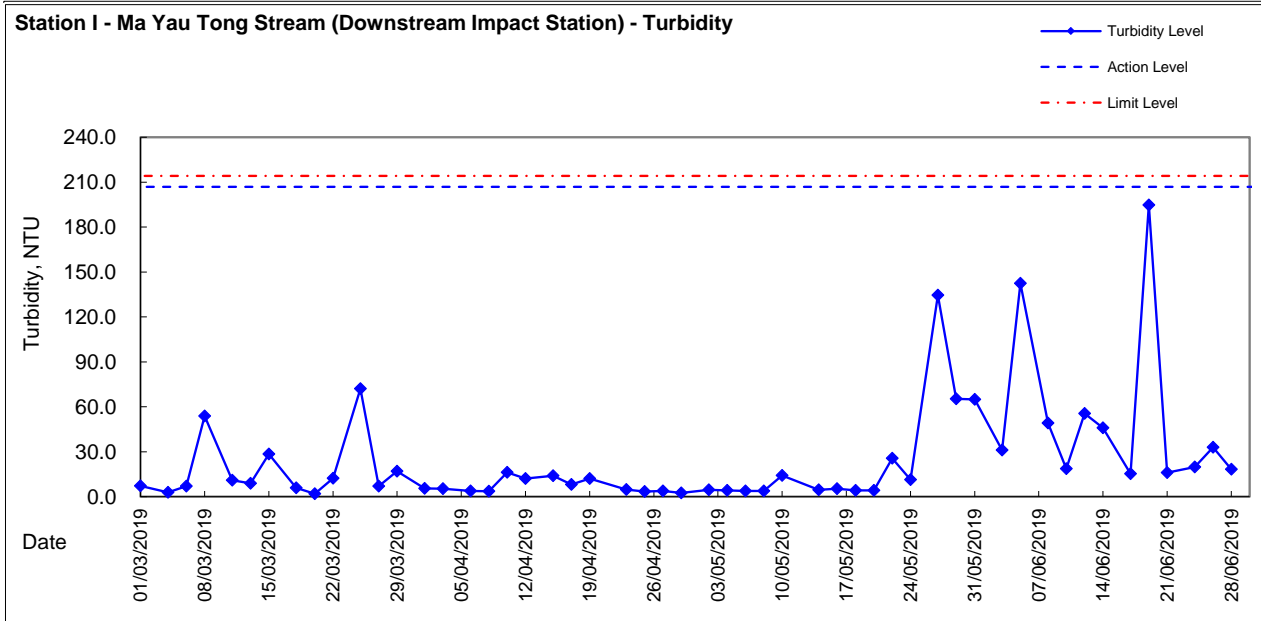





Graphic Presentation of WQM Result

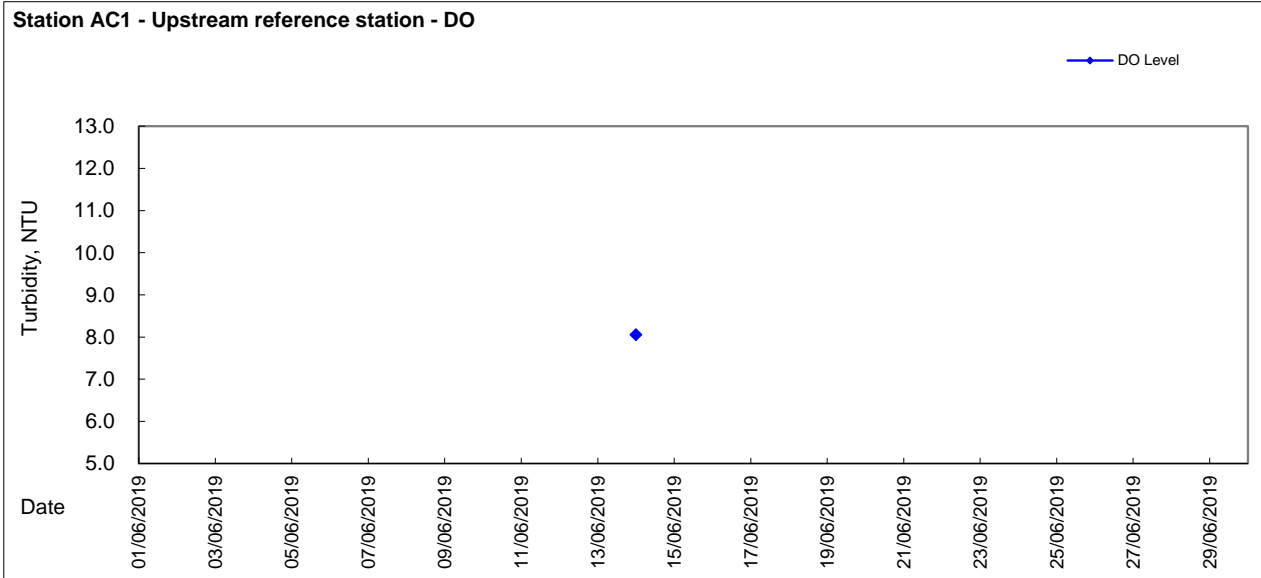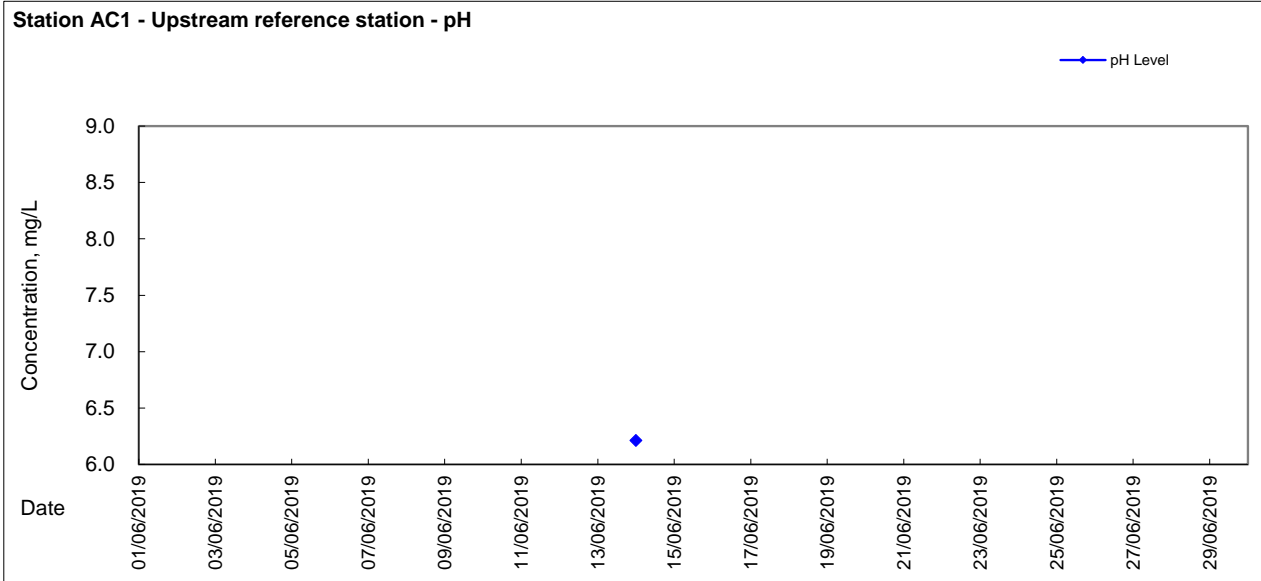





Graphic Presentation of WQM Result

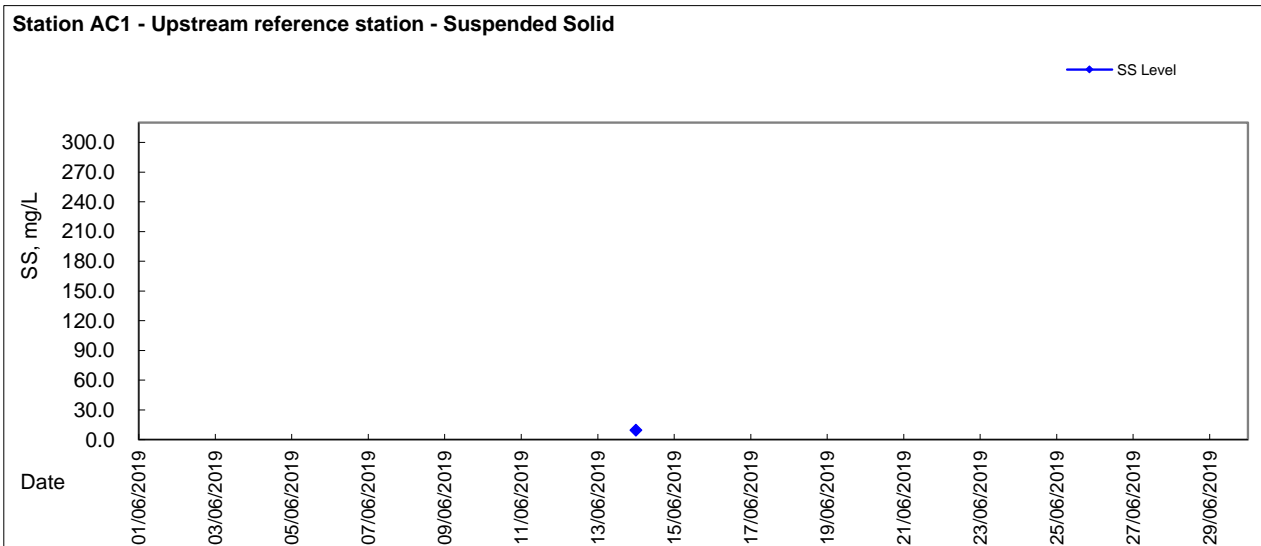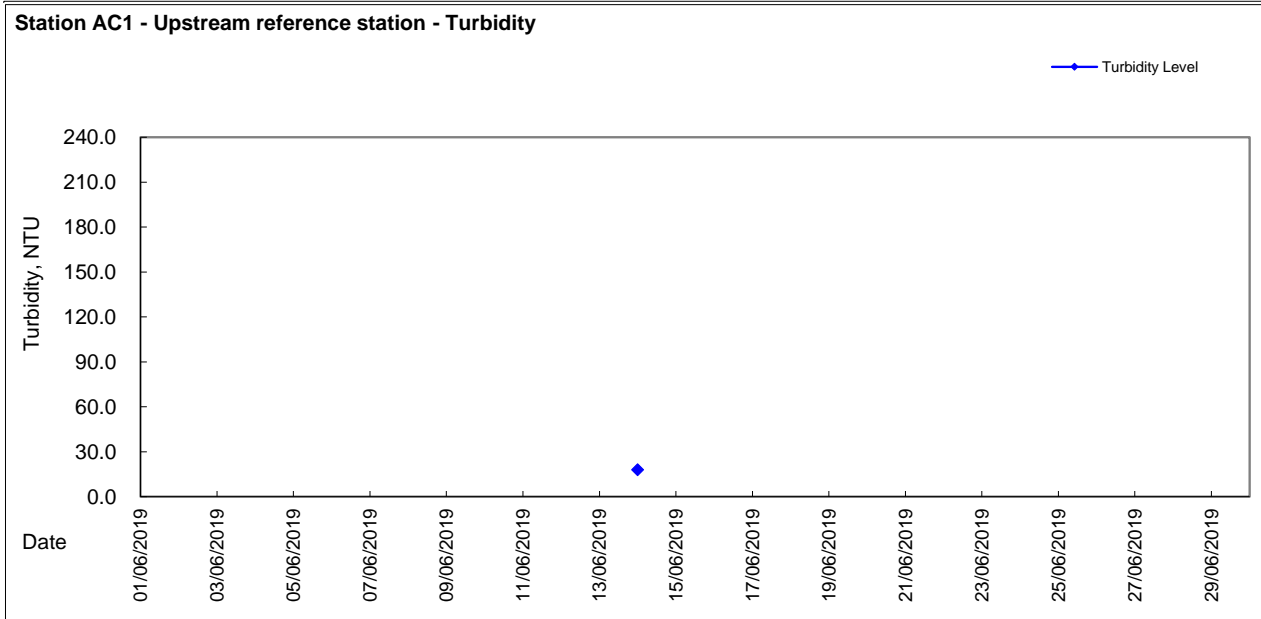





Graphic Presentation of WQM Result

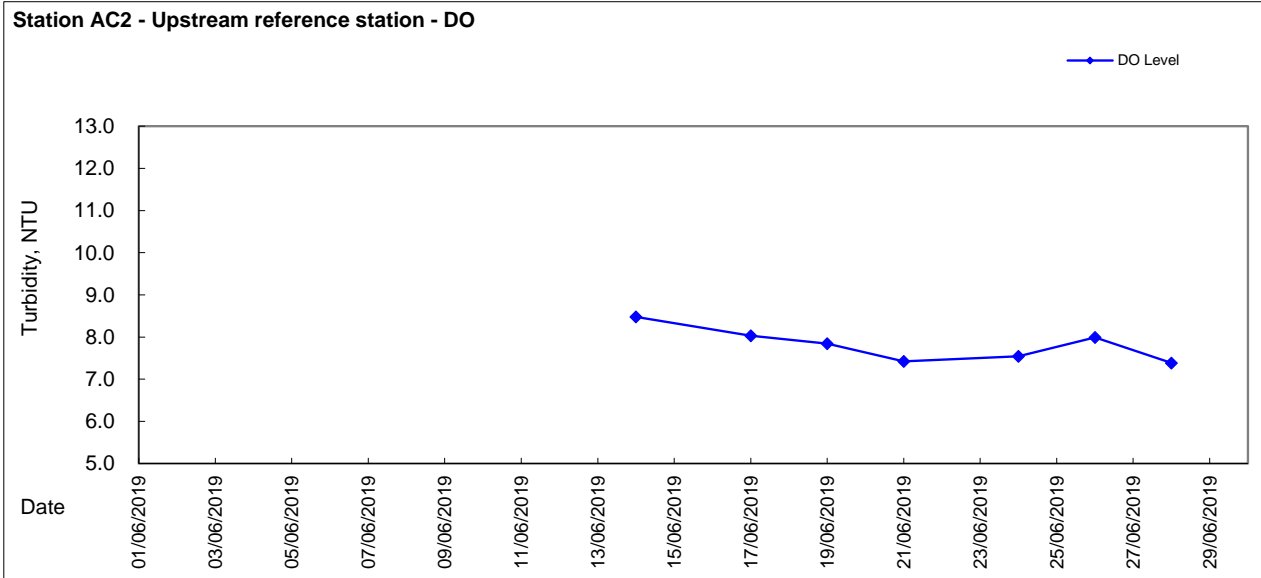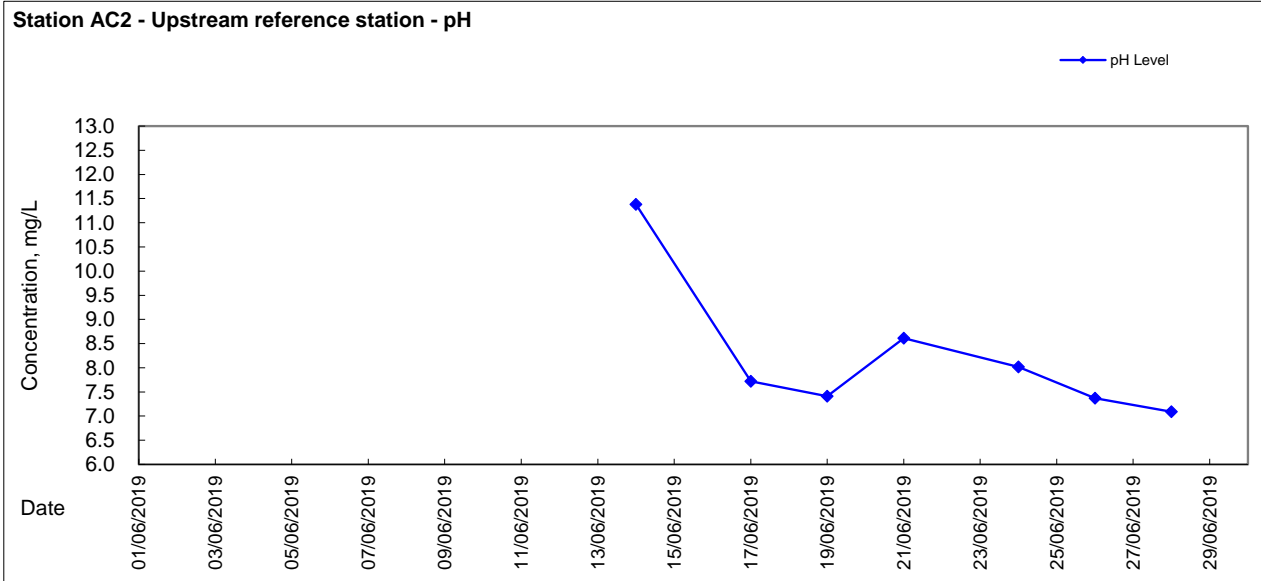





Graphic Presentation of WQM Result

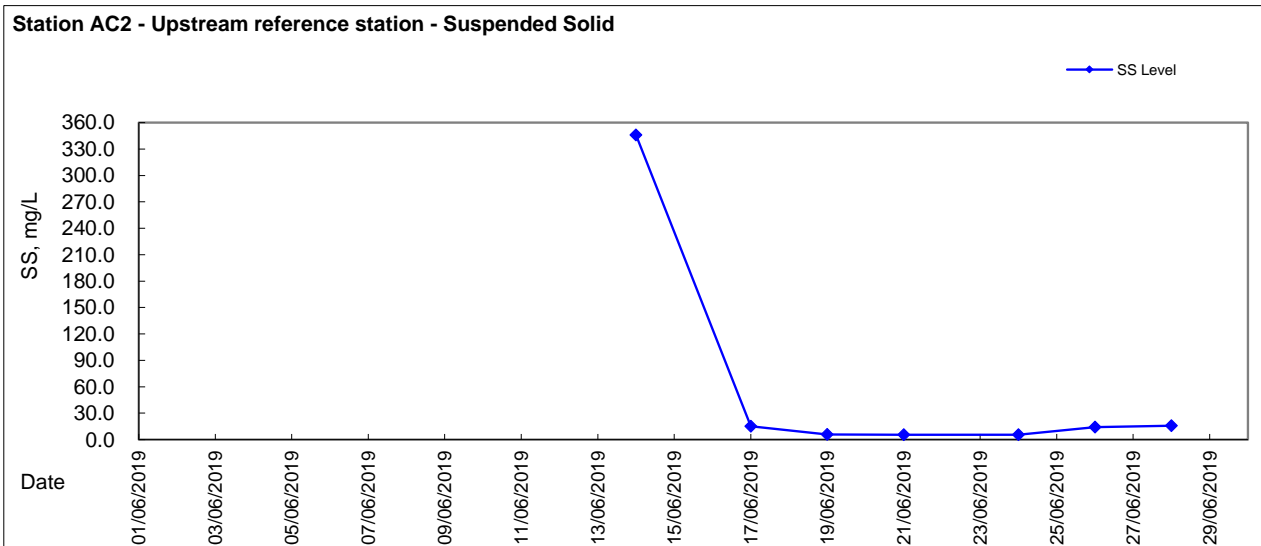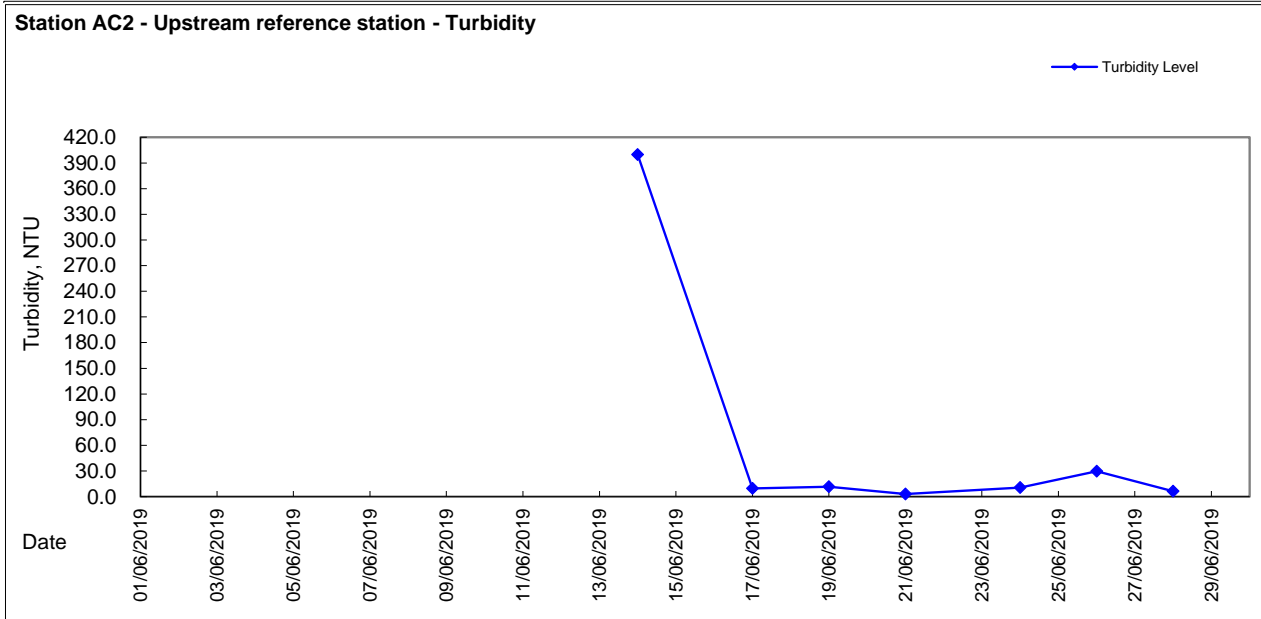





Graphic Presentation of WQM Result

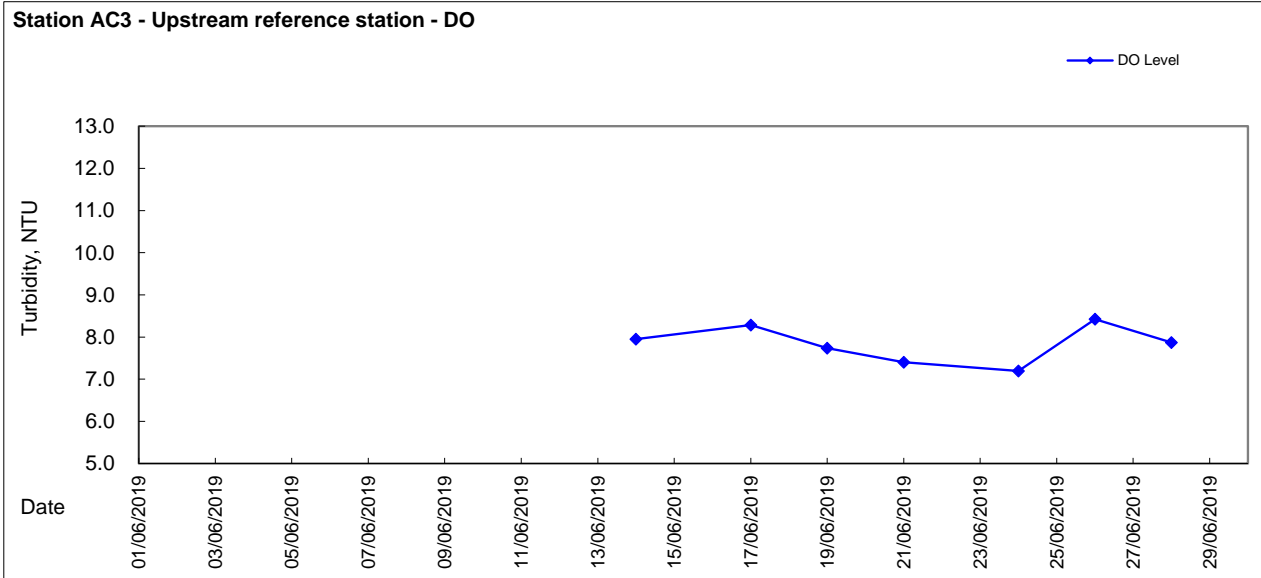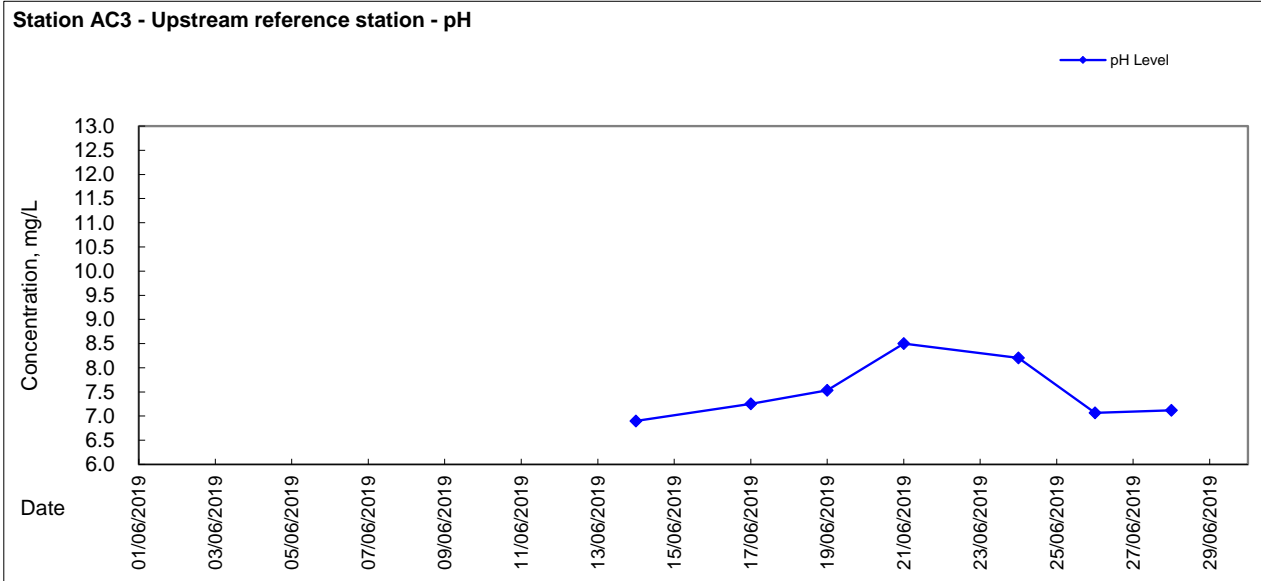





Graphic Presentation of WQM Result

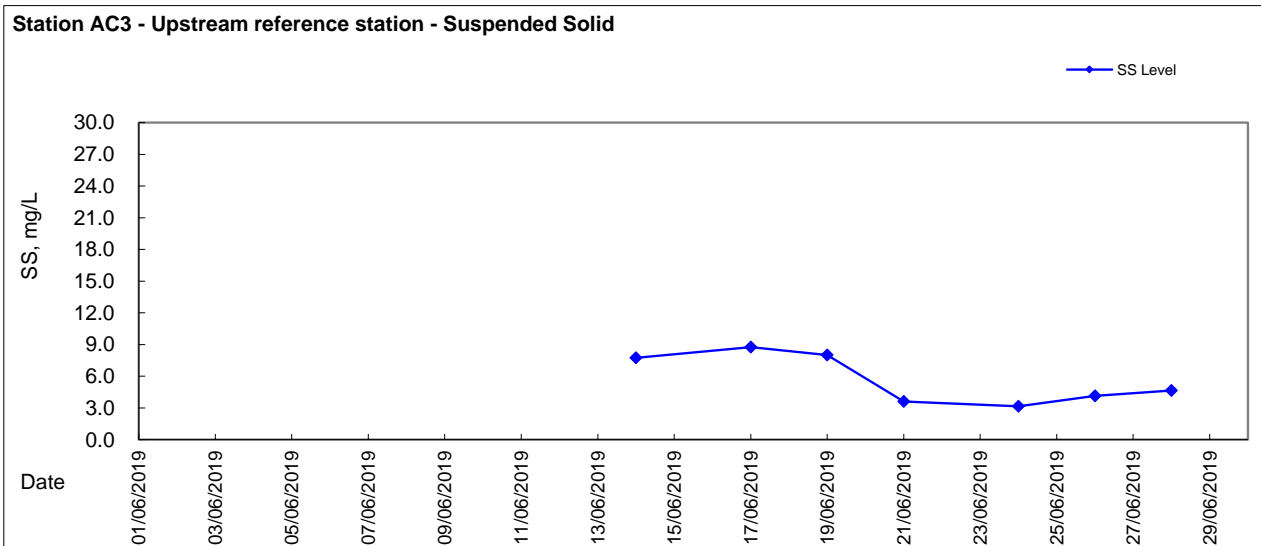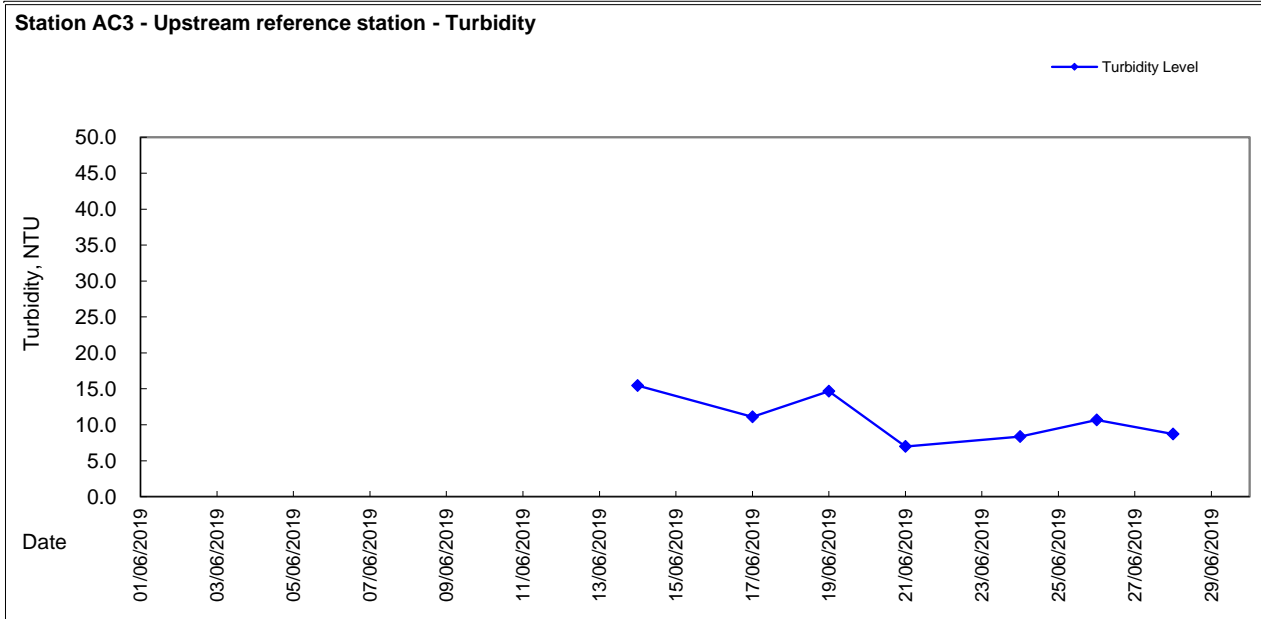



***Appendix 5.5***

***Monthly Summary Waste Flow Table***

**Contract No.: NE/2017/03**

Development of Anderson Road Quarry Site – Road Improvement Works and Pedestrian Connectivity Facilities Works Phase 2A

**Monthly Summary Waste Flow Table for 2018(year)**

Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000m <sup>3</sup> )
Jan	--	--	--	--	--	--	--	--	--	--	--
Feb	--	--	--	--	--	--	--	--	--	--	--
Mar	--	--	--	--	--	--	--	--	--	--	--
Apr	--	--	--	--	--	--	--	--	--	--	--
May	--	--	--	--	--	--	--	--	--	--	--
Jun	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
<b>Sub-total</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>
Jul	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Aug	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Sep	0.000	0.000	0.000	0.000	0.000	0.000	0.005	0.006	0.004	0.000	0.000
Oct	0.000	0.000	0.000	0.000	0.000	0.000	0.003	0.081	0.003	0.000	0.000
Nov	0.003	0.000	0.000	0.000	0.003	0.000	0.004	0.088	0.003	0.000	0.000
Dec	0.116	0.000	0.000	0.000	0.116	0.001	0.004	0.064	0.002	0.000	0.003
<b>Total</b>	<b>0.119</b>	<b>0.000</b>	<b>0.000</b>	<b>0.000</b>	<b>0.119</b>	<b>0.001</b>	<b>0.015</b>	<b>0.238</b>	<b>0.012</b>	<b>0.000</b>	<b>0.003</b>

## Contract No.: NE/2017/03

Development of Anderson Road Quarry Site – Road Improvement Works and Pedestrian Connectivity Facilities Works Phase 2A

Forecast of Total Quantities of C&D Materials to be Generated from the Contract*										
Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000m <sup>3</sup> )
7.000	0	0	0	7.000	0	100.000	2.000	0.300	1.000	3.500

- Notes:
- (1) The performance targets are given in PS Clause 6.14.
  - (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
  - (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material and waste will be collected by recycler for recycling
  - (4) Use the conversion factor, density of general refuse (1 t/m<sup>3</sup>) and inert C&D materials (2 t/m<sup>3</sup>).
  - (5) Use the conversion factor for chemical waste (0.88kg/L)

**Contract No.: NE/2017/03**

Development of Anderson Road Quarry Site – Road Improvement Works and Pedestrian Connectivity Facilities Works Phase 2A

**Monthly Summary Waste Flow Table for 2019(year)**

Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000m <sup>3</sup> )
Jan	0.514	0.000	0.000	0.000	0.514	0.000	0.000	0.000	0.000	0.000	0.005
Feb	0.419	0.000	0.000	0.000	0.419	0.000	0.010	0.103	0.020	0.000	0.004
Mar	0.672	0.000	0.000	0.000	0.672	0.000	0.001	0.084	0.002	0.000	0.005
Apr	1.505	0.000	0.000	0.000	1.505	0.000	0.000	0.000	0.000	0.000	0.000
May	1.309	0.000	0.000	0.563	1.309	0.000	0.003	0.179	0.006	0.000	0.009
Jun	0.695	0.000	0.000	0.488	0.695	0.000	0.000	0.000	0.000	0.000	0.018
Sub-total	5.115	0.000	0.000	1.050	5.115	0.000	0.014	0.366	0.028	0.000	0.041
Jul											
Aug											
Sep											
Oct											
Nov											
Dec											
Total	5.115	0.000	0.000	1.050	5.115	0.000	0.014	0.366	0.028	0.000	0.041

## Contract No.: NE/2017/03

Development of Anderson Road Quarry Site – Road Improvement Works and Pedestrian Connectivity Facilities Works Phase 2A

Forecast of Total Quantities of C&D Materials to be Generated from the Contract*										
Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000m <sup>3</sup> )
7.000	0	0	0	7.000	0	100.000	2.000	0.300	1.000	3.500

- Notes:
- (1) The performance targets are given in PS Clause 6.14.
  - (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
  - (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material and waste will be collected by recycler for recycling
  - (4) Use the conversion factor, density of general refuse (1 t/m<sup>3</sup>) and inert C&D materials (2 t/m<sup>3</sup>).
  - (5) Use the conversion factor for chemical waste (0.88kg/L)



***Appendix 6.1***

***Event Action Plans***



**Event and Action Plan for Construction Noise**

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
Action Level being exceeded	<ol style="list-style-type: none"> <li>1. Notify ER, IEC and Contractor;</li> <li>2. Carry out investigation;</li> <li>3. Report the results of investigation to the IEC, ER and Contractor;</li> <li>4. Discuss with the IEC and Contractor on remedial measures required;</li> <li>5. Increase monitoring frequency to check mitigation effectiveness.</li> </ol>	<ol style="list-style-type: none"> <li>1. Review the investigation results submitted by the ET;</li> <li>2. Review the proposed remedial measures by the Contractor and advise the ER accordingly;</li> <li>3. Advise the ER on the effectiveness of the proposed remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing;</li> <li>2. Notify Contractor;</li> <li>3. Require Contractor to propose remedial measures for the analyzed noise problem;</li> <li>4. Ensure remedial measures are properly implemented.</li> </ol>	<ol style="list-style-type: none"> <li>1. Submit noise mitigation proposals to ET Leader / ER;</li> <li>2. Implement noise mitigation proposals.</li> </ol>
Limit Level being exceeded	<ol style="list-style-type: none"> <li>1. Inform IEC, ER, Contractor and EPD;</li> <li>2. Repeat measurements to confirm findings;</li> <li>3. Increase monitoring frequency;</li> <li>4. Identify source and investigate the cause of exceedance;</li> <li>5. Carry out analysis of Contractor's working procedures;</li> <li>6. Discuss with the IEC, Contractor and ER on remedial measures required;</li> <li>7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results;</li> <li>8. If exceedance stops, cease additional monitoring.</li> </ol>	<ol style="list-style-type: none"> <li>1. Discuss amongst ER, ET, and Contractor on the potential remedial actions;</li> <li>2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly.</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of failure in writing;</li> <li>2. Notify Contractor;</li> <li>3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented;</li> <li>4. Supervise the implementation of remedial measures;</li> <li>5. If exceedance continues, consider stopping the Contractor to continue working on that portion of work which causes the exceedance until the exceedance is abated.</li> </ol>	<ol style="list-style-type: none"> <li>1. Take immediate action to avoid further exceedance;</li> <li>2. Submit proposals for remedial actions to IEC and ER within 3 working days of notification;</li> <li>3. Implement the agreed proposals;</li> <li>4. Submit further proposal if problem still not under control;</li> <li>5. Stop the relevant portion of works as instructed by the ER until the exceedance is abated.</li> </ol>





**Event and Action Plan for Construction Air Quality**

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
<b>ACTION LEVEL</b>				
1. Exceedance for one sample	1. Identify source, investigate the causes of exceedance and propose remedial measures; 2. Inform Contractor, IEC and ER; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily.	1. Check monitoring data submitted by ET; 2. Check Contractor's working method; and 3. Review and advise the ET and ER on the effectiveness of the proposed remedial measures.	1. Notify Contractor.	1. Identify source(s), investigate the causes of exceedance and propose remedial measures; 2. Implement remedial measures; and 3. Amend working methods agreed with the ER as appropriate
2. Exceedance for two or more consecutive samples	1. Identify source; 2. Inform Contractor, IEC and ER; 3. Advise the Contractor and ER on the effectiveness of the proposed remedial measures; 4. Repeat measurements to confirm findings; 5. Increase monitoring frequency to daily; 6. Discuss with IEC and Contractor on remedial actions required; 7. If exceedance continues, arrange meeting with Contractor, IEC and ER; 8. If exceedance stops, cease additional monitoring.	1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET, ER and Contractor on possible remedial measures; 4. Advise the ET and ER on the effectiveness of the proposed remedial measures; 5. Supervise Implementation of remedial measures.	1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. 4. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.	1. Identify source and investigate the causes of exceedance; 2. Submit proposals for remedial measures to the ER with a copy to ET and IEC within three working days of notification; 3. Implement the agreed proposals; and 4. Amend proposal as appropriate.



**Event and Action Plan for Construction Air Quality (Con't)**

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
<b>LIMIT LEVEL</b>				
1. Exceedance for one sample	1. Identify source, investigate the causes of exceedance and propose remedial measures; 2. Inform Contractor, IEC, ER, and EPD; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily; 5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results.	1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ER on the effectiveness of the proposed remedial measures; 5. Supervise implementation of remedial measures.	1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented.	1. Identify source(s) and investigate the causes of exceedance; 2. Take immediate action to avoid further exceedance; 3. Submit proposals for remedial measures to ER with a copy to ET and IEC within three working days of notification; 4. Implement the agreed proposals; and 5. Amend proposal if appropriate.
2. Exceedance for two or more consecutive samples	1. Notify IEC, ER, Contractor and EPD; 2. Identify source; 3. Repeat measurement to confirm findings; 4. Increase monitoring frequency to daily; 5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; 6. Arrange meeting with IEC and ER to discuss the remedial actions to be taken; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring.	1. Check monitoring data submitted by the ET; 2. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 3. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; 4. Supervise the implementation of remedial measures.	1. Confirm receipt of notification of exceedance in writing; 2. In consultation with the ET and IEC, agree with the Contractor on the remedial measures to be implemented; 3. Supervise the implementation of remedial measures; and 4. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.	1. Identify source(s) and investigate the causes of exceedance; 2. Take immediate action to avoid further exceedance; 3. Submit proposals for remedial measures to the ER with a copy to the IEC and ET within three working days of notification; 4. Implement the agreed proposals; 5. Revise and resubmit proposals if problem still not under control; and 6. Stop the relevant portion of works as determined by the ER until the exceedance is abated.



**Event and Action Plan for Water Quality**

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
<b>ACTION LEVEL</b>				
Action level being exceeded by one sampling day	<ol style="list-style-type: none"> <li>Repeat in situ measurement to confirm findings;</li> <li>Identify reasons for noncompliance and source(s) of impact;</li> <li>Inform IEC and Contractor;</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods;</li> <li>Discuss mitigation measures with IEC, ER and Contractor;</li> <li>Repeat measurement on next day of exceedance.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with ET, ER and Contractor on the mitigation measures;</li> <li>Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly;</li> <li>Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with ET, IEC and Contractor on the proposed mitigation measures;</li> <li>Make agreement on the mitigation measures to be implemented.</li> <li>Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the noncompliance in writing;</li> <li>Rectify unacceptable practice;</li> <li>Check all plant and equipment;</li> <li>Consider changes of working methods;</li> <li>Discuss with ET, ER and IEC and propose mitigation measures to IEC and ER;</li> <li>Implement the agreed mitigation measures.</li> </ol>
Action level being exceeded by more than one consecutive sampling days	<ol style="list-style-type: none"> <li>Repeat in situ measurement to confirm findings;</li> <li>Identify reasons for noncompliance and source(s) of impact;</li> <li>Inform IEC and Contractor;</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods;</li> <li>Discuss mitigation measures with IEC, ER and Contractor;</li> <li>Ensure mitigation measures are implemented;</li> <li>Prepare to increase the monitoring frequency to daily;</li> <li>Repeat measurement on next day of exceedance.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with ET, ER and Contractor on the mitigation measures;</li> <li>Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly;</li> <li>Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with ET, IEC and Contractor on the proposed mitigation measures;</li> <li>Make agreement on the mitigation measures to be implemented;</li> <li>Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the noncompliance in writing;</li> <li>Rectify unacceptable practice;</li> <li>Check all plant and equipment;</li> <li>Consider changes of working methods;</li> <li>Discuss with ET, ER and IEC and propose mitigation measures to IEC and ER within three working days;</li> <li>Implement the agreed mitigation measures.</li> </ol>



**Event and Action Plan for Water Quality (cont'd)**

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
<b>LIMIT LEVEL</b>				
Limit level being exceeded by one sampling day	<ol style="list-style-type: none"> <li>Repeat in situ measurement to confirm findings;</li> <li>Identify reasons for noncompliance and source(s) of impact;</li> <li>Inform IEC Contractor and EPD;</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods;</li> <li>Discuss mitigation measures with IEC, ER and Contractor;</li> <li>Ensure mitigation measures are implemented;</li> <li>Increase the monitoring frequency to daily until no exceedance of Limit level.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with ET, ER and Contractor on the mitigation measures;</li> <li>Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly;</li> <li>Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with IEC, ET and Contractor on the proposed mitigation measures;</li> <li>Request Contractor to critically review the working methods;</li> <li>Make agreement on the mitigation measures to be implemented;</li> <li>Supervise the implementation of remedial measures.</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the noncompliance in writing;</li> <li>Rectify unacceptable practice;</li> <li>Check all plant and equipment;</li> <li>Consider changes of working methods;</li> <li>Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within three working days;</li> <li>Implement the agreed mitigation measures.</li> </ol>
Limit level being exceeded by more than one consecutive sampling days	<ol style="list-style-type: none"> <li>Repeat in situ measurement to confirm findings;</li> <li>Identify reasons for noncompliance and source(s) of impact;</li> <li>Inform IEC Contractor and EPD;</li> <li>Check monitoring data, all plant, equipment and Contractor's working methods;</li> <li>Discuss mitigation measures with IEC, ER and Contractor;</li> <li>Ensure mitigation measures are implemented;</li> <li>Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with ET, ER and Contractor on the mitigation measures;</li> <li>Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly;</li> <li>Assess the effectiveness of the implemented mitigation measures.</li> </ol>	<ol style="list-style-type: none"> <li>Discuss with IEC, ET and Contractor on the proposed mitigation measures;</li> <li>Request Contractor to critically review the working methods;</li> <li>Make agreement on the mitigation measures to be implemented;</li> <li>Supervise the implementation of remedial measures;</li> <li>Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the construction activities until no exceedance of Limit level.</li> </ol>	<ol style="list-style-type: none"> <li>Inform the ER and confirm notification of the noncompliance in writing;</li> <li>Rectify unacceptable practice;</li> <li>Check all plant and equipment;</li> <li>Consider changes of working methods;</li> <li>Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within three working days;</li> <li>Implement the agreed mitigation measures;</li> <li>As directed by the ER, to slow down or to stop all or part of the construction activities.</li> </ol>



**Event and Action Plan for Landscape and Visual**

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
<b>LIMIT LEVEL</b>				
Nonconformity on one occasion	<ol style="list-style-type: none"> <li>1. Identify source(s);</li> <li>2. Inform the Contractor, IEC and ER;</li> <li>3. Discuss remedial actions with IEC, ER and Contractor;</li> <li>4. Monitor remedial actions until rectification has been completed</li> </ol>	<ol style="list-style-type: none"> <li>1. Check inspection report;</li> <li>2. Check contractor's working method;</li> <li>3. Discuss with ET, ER and Contractor on possible remedial measures;</li> <li>4. Advise ER on effectiveness of proposed remedial measures;</li> <li>5. Check implementation of remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Confirm receipt of notification of non-conformity in writing</li> <li>2. Review and agree on the remedial measures proposed by the Contractor;</li> <li>3. Supervise implementation of remedial</li> </ol>	<ol style="list-style-type: none"> <li>1. Identify source and investigate the non- conformity</li> <li>2. Implement remedial measures</li> <li>3. Amend working methods agreed with ER as appropriate</li> <li>4. Rectify damage and undertake any necessary replacement</li> </ol>
Repeated Nonconformity	<ol style="list-style-type: none"> <li>1. Identify source(s)</li> <li>2. Inform the Contractor, IEC and ER;</li> <li>3. Discuss inspection frequency</li> <li>4. Discuss remedial actions with IEC, ER and Contractor</li> <li>5. Monitor remedial actions until rectification has been completed;</li> <li>6. If non- conformity stops, cease additional monitoring</li> </ol>	<ol style="list-style-type: none"> <li>1. Check inspection report</li> <li>2. Check Contractor's working method</li> <li>3. Discuss with ET, ER and Contractor on possible remedial measures</li> <li>4. Advise ER on effectiveness of proposed remedial measures</li> <li>5. Supervise implementation of remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Notify the Contractor</li> <li>2. In consultation with the ET and IEC, agree with the Contractor on the remedial measures to be implemented</li> <li>3. Supervise implementation of remedial measures</li> </ol>	<ol style="list-style-type: none"> <li>1. Identify source and investigate the non- conformity</li> <li>2. Implement remedial measures</li> <li>3. Amend working methods agreed with ER as appropriate</li> <li>4. Rectify damage and undertake any necessary replacement. Stop relevant portion of works as determined by ER until the non- conformity is abated.</li> </ol>



***Appendix 6.2***

***Summary for Notification of Exceedance***



Ref no.	Date	Location	Parameters (Unit)	Measured	Action Level	Limit Level	Follow-up action
X_18RIW2_013	20-May-19	F	Turbidity (NTU)	78.0	24.4	32.7	<p><b>Possible reason:</b> Natural variation in water quality in the vicinity of the water quality monitoring station or suspected contribution from other construction site activities at Fei Ha Road.</p> <p><b>Action taken/ to be taken:</b> A repeated in-situ measurement (Turbidity = 77.90) had been conducted immediately to confirm the exceedances. Checking with contractor for the construction activities conducted on 20 May 2019. Increased the monitoring frequency to daily on 21 May 2019, no exceedance was recorded (Turbidity = 5.2). For suspended solid, exceedance was recorded on 22 May 2019 (suspended solid = 110.5 mg/L). Data sheet are attached for reference.</p> <p><b>Remarks/ Other Observations:</b> Slightly milky water was observed at monitoring station F during water quality monitoring, meanwhile, milky water was observed at upstream and other existing construction site at the upper of Fei Ngo Shan Road was observed at upstream. Site clearance, chain link fence and survey checking were commenced at RIW2 construction site area under Contract No. NE/2017/03 on the monitoring date, however, no surface runoff and no effluent discharge from construction works area into the concerned waterbody was observed during monitoring and afterward daily monitoring. In view of the above, it is considered that there were no evidence to suggest the exceedances were related to Project works at RIW2. Daily programme, site condition photos and the abstract of weather information from HKO are attached for reference.</p>
			pH	7.3	6.6-8.4	6.5-8.5	
			SS (mg/L)	61.1	17.0	23.8	
			DO(mg/l)	7.2	5.8	5.5	
X_18RIW2_014	22-May-19	F	Turbidity (NTU)	129.4	24.4	32.7	<p><b>Possible reason:</b> Natural variation in water quality due to raining in the vicinity of the water quality monitoring station or suspected contribution from other construction site activities at the upper of Fei Ngo Shan Road.</p> <p><b>Action taken/ to be taken:</b> A repeated in-situ measurement (Turbidity = 127.90) had been conducted immediately to confirm the exceedances. Checking with contractor for the construction activities conducted on 22 May 2019. Increased the monitoring frequency to daily on 23 May 2019, exceedance was recorded (Turbidity = 67.3). For suspended solid, exceedance was recorded on 24 May 2019 (suspended solid = 499.0 mg/L). Data sheet are attached for reference.</p> <p><b>Remarks/ Other Observations:</b> Amber rainstorm warning signal was enforced on 20 and 21 May 2019 and it was also rainy on 23 May 2019. Silty water was observed at monitoring station F during water quality monitoring, meanwhile, other existing construction site at Fei Ha Road was observed at upstream and silty water was also observed at upper stream of station F. Site clearance and survey checking were commenced at RIW2 construction site area under Contract No. NE/2017/03 on 22 May 2019 and Site clearance, chain link fence and survey checking were commenced at RIW2 on 23 May 2019, however, no surface runoff and no effluent discharge from construction works area into the concerned waterbody was observed during monitoring and afterward daily monitoring. In view of the above, it is considered that there were no evidence to suggest the exceedances were related to Project works at RIW2. Daily programme, site condition photos and the abstract of weather information from HKO are attached for reference.</p>
			pH	8.4	6.6-8.4	6.5-8.5	
			SS (mg/L)	110.5	17.0	23.8	
			DO(mg/l)	8.2	5.8	5.5	



Ref no.	Date	Location	Parameters (Unit)	Measured	Action Level	Limit Level	Follow-up action
X_18RIW2_015	24-May-19	F	Turbidity (NTU)	681.2	24.4	32.7	<p><b>Possible reason:</b> Runoff from site was observed entering the nearby gullies and may cause possible contribution to the exceedance, hence, the exceedance was project related. Natural variation in water quality due to raining in the vicinity of the water quality monitoring station and suspected contribution from other construction site activities at the upper of Fei Ha Road were also possibly causing the limit level of exceedance.</p> <p><b>Action taken/ to be taken:</b> A repeated in-situ measurement (Turbidity = 681.2 NTU) had been conducted immediately to confirm the exceedances. Checking with contractor for the construction activities conducted on 24 May 2019. Inspecting the surrounding of site, drainages condition, water flow at those drainages and the water flow, to find out possible causes to the abnormally high level of exceedance. Increased the monitoring frequency to daily on 25 May 2019 and 26 May 2019, exceedance was recorded on 25 May 2019 (Turbidity = 139.6 NTU) but no exceedance was found on 26 May 2019. For suspended solid, exceedance was recorded on 27 May 2019 (Suspended solid = 124.3). Data sheet are attached for reference.</p> <p><b>Remarks/ Other Observations:</b> The weather condition was rainy from 23 to 27 May 2019. Silty water was observed at monitoring station F during water quality monitoring on 24 May 2019 and milky water was observed on 25 May 2019, meanwhile, other existing construction site at Fei Ha Road was observed at upstream. Site clearance, chain link fence and survey checking were commenced at RIW2 construction site area under Contract No. NE/2017/03 on 24 and 25 May 2019, and silty water was observed entering the nearby gullies due to the washing of slit that was brought outside the site by the dumping truck leaving from the site entrance on 24 May 2019. However, no surface runoff and no effluent discharge from construction works area into the concerned waterbody was observed on 25 and 26 May 2019. In view of the above, it is considered that the slit that entering the nearby gullies may have contribution to the exceedance on 24 May 2019 although heavy rain and contribution from other construction site may also be the possible causes of the exceedance in the cumulative effect. Therefore, the exceedance was related to Project works at RIW2. Daily programme, site condition photos and the abstract of weather information from HKO are attached for reference.</p>
			pH	7.4	6.6-8.4	6.5-8.5	
			SS (mg/L)	499.0	17.0	23.8	
			DO(mg/l)	7.6	5.8	5.5	





Ref no.	Date	Location	Parameters (Unit)	Measured	Action Level	Limit Level	Follow-up action
X_18RIW2_016	27-May-19	F	Turbidity (NTU)	70.6	24.4	32.7	<p><b>Possible reason:</b> Natural variation in water quality due to raining in the vicinity of the water quality monitoring station.</p> <p><b>Action taken/ to be taken:</b> A repeated in-situ measurement (Turbidity = 71.72 NTU) had been conducted immediately to confirm the exceedances. Checking with contractor for the construction activities conducted on 27 May 2019. Increased the monitoring frequency to daily on 28 May 2019, exceedance was recorded (Turbidity = 50.2 NTU). The follow-up monitoring was carried out until 30 May 2019 and no exceedances were recorded on 29 and 30 May 2019. For suspended solid, no exceedance was recorded on 29 May 2019. Data sheet are attached for reference.</p> <p><b>Remarks/ Other Observations:</b> Amber rainstorm warning signal was enforced on 26, 27 and 28 May 2019. The weather condition was rainy from 26 to 28 May 2019. Milky water was observed at monitoring station I during water quality monitoring. No major works was observed on 27 May 2019 at the construction site at Fei Ha Road during water monitoring period but drilling was observed conducting on 28 May 2019. Site clearance and survey checking were commenced at RIW2 construction site area under Contract No. NE/2017/03 on the 27 May 2019 and Site clearance, soil nail and survey checking were commenced at RIW2 on 28 May 2019, however, no surface runoff and no effluent discharge from construction works area into the concerned waterbody was observed during monitoring and afterward daily monitoring. In view of the above, it is considered that there were no evidence to suggest the exceedances were related to Project works at RIW2. Daily programme, site condition photos and the abstract of weather information from HKO are attached for reference.</p>
			pH	8.2	6.6-8.4	6.5-8.5	
			SS (mg/L)	124.3	17.0	23.8	
			DO(mg/l)	8.1	5.8	5.5	



***Appendix 8.1***

***Complaint Log***



***Environmental Complaints Log***

<b>Complaint Log No.</b>	<b>Date of Complaint</b>	<b>Received From and Received By</b>	<b>Location of Complainant</b>	<b>Nature of Complaint</b>	<b>Outcome</b>	<b>Status</b>
--	--	--	--	--	--	--



***Appendix 9.1***

***Construction Programme of Individual Contracts***

Activity ID	Activity Name	Duration	Start	Finish	2019			
					May 17	Jun 18	Jul 19	Aug 20
<b>NE2017/03 - ARQ PHASE 2A - Monthly Programme Update (201905)-0_190518</b>		1123	09-Oct-18A	27-Sep-22				
<b>Road Improvement Works Location 1 (RIW1)</b>		248	14-Dec-18A	19-Dec-19				
<b>Construction Works</b>		248	14-Dec-18A	19-Dec-19				
<b>Preliminary Works</b>		145	21-Feb-19A	17-Aug-19				
CON10010	Install monitoring & instrumentation at portion A	33	21-Feb-19A	03-Jun-19				
CON110610	Preparation works & erect working platform for non-destructive test for the Lee	60	17-May-19A	27-Jul-19				
CON10240	Trees transplant at portion A	48	21-May-19	17-Jul-19				
CON11080	Non-destructive test for the Lee On Road Flyover	18	29-Jul-19	17-Aug-19				
<b>Slope Works and Retaining Wall RWC2 Works</b>		141	29-Apr-19A	20-Nov-19				
<b>Workfront 1 (RWC2 CH452 to CH270)</b>		141	29-Apr-19A	20-Nov-19				
CON10120	Form haul road (RWC2 CH452 to CH270)	48	29-Apr-19A	11-Jul-19				
<b>Foundation Works (RWC2 CH452 to CH270)</b>		78	19-Aug-19	20-Nov-19				
CON10230	Cut slope works (RWC2 CH452 to CH270)	78	19-Aug-19	20-Nov-19				
<b>Workfront 2 (RWC2 CH98 to CH-9)</b>		90	04-Jun-19	19-Sep-19				
CON10100	Form haul road (RWC2 CH98 to CH-9)	48	04-Jun-19	31-Jul-19				
<b>Foundation Works (RWC2 CH98 to CH-9)</b>		42	01-Aug-19	19-Sep-19				
CON10150	Hack-off existing road surface (RWC2 CH98 to CH-9)	12	01-Aug-19	14-Aug-19				
CON10310	Install sheet pile (RWC2 CH98 to CH-9)	36	08-Aug-19	19-Sep-19				
CON10180	Mobilisation works for socket H-pile works (RWC2 CH98 to CH-9)	12	15-Aug-19	28-Aug-19				
<b>Workfront 3 (RWC2 CH270 to CH98)</b>		75	17-May-19A	31-Aug-19				
CON10080	Form haul road (RWC2 CH270 to CH98)	48	17-May-19A	27-Jul-19				
<b>Foundation Works (RWC2 CH270 to CH98)</b>		30	29-Jul-19	31-Aug-19				
CON10140	Hack-off existing road surface (RWC2 CH270 to CH98)	12	29-Jul-19	10-Aug-19				
CON10160	Install sheet pile (RWC2 CH270 to CH98; 5m/d)	24	05-Aug-19	31-Aug-19				
CON10170	Mobilisation works for socket H-pile works (RWC2 CH270 to CH98)	12	12-Aug-19	24-Aug-19				
<b>Noise Barrier Works</b>		161	14-Dec-18A	11-Oct-19				
<b>Works in Slip Road 2</b>		145	14-Dec-18A	11-Sep-19				
CON101320	Supervisor reviewing road design on slip road 2	145	14-Dec-18A	15-Jun-19				
CON101330	New slip road alignment notification to town-gas company	17	29-Apr-19A	20-May-19A				
CON101932	Awaiting DC member attend site inspection of trial run at slip road 2	18	29-Apr-19A	25-May-19				
CON101340	New town-gas-main planning works (by town-gas company, 8wk request by tc	48	21-May-19	17-Jul-19				
CON101940	Formation works for slip road 2 _stage 1	18	27-May-19	17-Jun-19				
CON101950	Utilities works, drainage works for slip road 2 _stage 1	18	03-Jun-19	24-Jun-19				
CON101960	Road works for slip road 2 _stage 1	18	11-Jun-19	02-Jul-19				
CON101970	Formation works for slip road 2 _stage 2	18	18-Jun-19	09-Jul-19				
CON101980	ELS works for trench for new town-gas-main on slip road 2 _stage 2	18	25-Jun-19	16-Jul-19				
CON101990	Lay new town-gas-main on new slip road 2 _stage 3 (by town-gas contractor,	48	18-Jul-19	11-Sep-19				
<b>NBW (CT5-PC1 ~ CT5-PC3)</b>		152	06-Apr-19A	11-Oct-19				
CON10570	Site formation works & form haul road (CT5)	60	06-Apr-19A	21-Jun-19				
CON105610	Awaiting LCSD on planting arrangement issue confirmation	60	06-Apr-19A	25-May-19				
CON10590	Pre-drill & construct socket H-pile works (CT5-PC1 ~ CT5-PC3) (12nos, 6d/no	72	17-Jul-19	11-Oct-19				
<b>Works in Subway KS27</b>		178	15-Apr-19A	19-Dec-19				
CON101910	Site clearance at KS27	90	15-Apr-19A	05-Aug-19				
CON101920	ELS works at KS27	90	24-Jun-19	10-Oct-19				
CON101930	Coordination with UU company & UU diversion at KS27	120	30-Jul-19	19-Dec-19				
<b>Road Improvement Works Location 2 (RIW2)</b>		1123	09-Oct-18A	27-Sep-22				
<b>Construction Works in Slope C3 (Portion B)</b>		146	23-Mar-19A	19-Sep-19				
<b>Preliminary Works</b>		72	15-Apr-19A	15-Jul-19				
<b>Site Set-up Works</b>		72	15-Apr-19A	15-Jul-19				
CON20044	PMI #23 & EWN #30 Transplant Aquilaria Sinensis at portion B	72	15-Apr-19A	15-Jul-19				
<b>Slope Works at Portion B</b>		146	23-Mar-19A	19-Sep-19				
<b>Earth Works</b>		146	23-Mar-19A	19-Sep-19				
<b>Haul Road &amp; Soil Nail Works</b>		146	23-Mar-19A	19-Sep-19				
CON20150	Form haul road @P4 to P3	66	23-Mar-19A	18-Jun-19				
CON201510	Form haul road @P1	36	10-May-19A	25-Jun-19				
CON20180	Mobilization & setup for soil nails works @P3	12	19-Jun-19	03-Jul-19				
CON202030	Mobilization & setup for soil nails works @P1	12	26-Jun-19	10-Jul-19				
CON20200	Drill & install soil nails (P3a, 55nos 8m dp, 3d/no, 3 team)	66	04-Jul-19	19-Sep-19				
CON202040	Drill & install soil nails (P1, 55nos 8m dp, 3d/no, 3 team)	60	11-Jul-19	19-Sep-19				
CON201520	Form haul road @P2	36	16-Jul-19	26-Aug-19				
<b>Cut Slope &amp; Fill Slope Works</b>		78	19-Jun-19	19-Sep-19				
CON20510	Install sheet pile to RW bay 9 to bay 13	18	19-Jun-19	10-Jul-19				
CON20530	ELS to RW bay 9 to bay 13 formation	60	11-Jul-19	19-Sep-19				

- Actual Work
- Remaining Work
- Milestone

Activity ID	Activity Name	Duration	Start	Finish	2019			
					May 17	Jun 18	Jul 19	Aug 20
<b>Construction Noise Semi-Enclosure SE2 (Portion C)</b>		1123	09-Oct-18 A	27-Sep-22				
<b>Preliminary Works</b>		1012	06-Mar-19 A	27-Sep-22				
<b>Site Set-up Works</b>		1012	06-Mar-19 A	27-Sep-22				
CON20051	Trees preservation duration works period at portion C	1012	06-Mar-19 A	27-Sep-22				
<b>Construction Works</b>		352	09-Oct-18 A	27-Dec-19				
<b>Road Works</b>		223	09-Oct-18 A	24-Jul-19				
CON20030	Notification of District Welcome Signboard relocation	175	09-Oct-18 A	15-May-19 A				
CON201120	Relocation of existing HyD lighting (by CLPE's contractor)	126	15-Nov-18 A	27-May-19				
CON201150	Remove existing central median - stage 2	35	11-Mar-19 A	10-Jun-19				
CON201170	Remove existing central median - stage 3	25	25-Mar-19 A	21-Jun-19				
CON200310	Preparation works and TTA procedure for relocation	18	16-May-19 A	05-Jun-19				
CON201140	Install temporary lighting - stage 1	9	28-May-19	06-Jun-19				
CON20100	Site clearance for new location of District Welcome Signboard	12	04-Jun-19	18-Jun-19				
CON20120	Construct haul road near junction at clear water bay road	12	04-Jun-19	18-Jun-19				
CON201160	Install temporary lighting - stage 2	6	11-Jun-19	17-Jun-19				
CON201010	Construct footing of District Welcome Signboard at new location	10	19-Jun-19	29-Jun-19				
CON201020	District Welcome Signboard relocation	12	02-Jul-19	15-Jul-19				
CON201030	Make good works for District Welcome Signboard relocation	8	16-Jul-19	24-Jul-19				
<b>Noise Semi-Enclosure Sub-structure Works</b>		156	22-Jun-19	27-Dec-19				
<b>Phase 1 (CT4, SE2 Bay4 to Bay12)</b>		156	22-Jun-19	27-Dec-19				
CON20130	Traffic diversion for phase 1 (CT4, SE2 Bay4 to Bay12)	0	22-Jun-19					
CON20140	Site formation works (CT4, SE2 Bay4 to Bay12; L=110m)	48	22-Jun-19	17-Aug-19				
CON20160	Pre-drill & construct piling fdn (CT4, SE2 Bay4 to Bay12)	108	19-Aug-19	27-Dec-19				
<b>Road Improvement Works Location 3 (RIW3)</b>		485	11-Dec-18 A	13-Aug-20				
<b>Construction Works</b>		485	11-Dec-18 A	13-Aug-20				
<b>Works in Slope D1</b>		390	23-Apr-19 A	13-Aug-20				
<b>Preparation Works</b>		60	23-Apr-19 A	05-Jul-19				
CON30012	Install monitoring & instrumentation (Slope D1)	60	23-Apr-19 A	05-Jul-19				
CON30011	Form haul road (Slope D1 Access road A)	54	25-Apr-19 A	29-Jun-19				
<b>Slope Works (Slope D1)</b>		360	30-May-19	13-Aug-20				
CON30160	Cut slope works & form haul road B	72	30-May-19	23-Aug-19				
CON30060	Slope works at slope D1 (stage 1)	360	30-May-19	13-Aug-20				
<b>Construction of Retaining Wall RWD1</b>		173	20-Jul-19	17-Feb-20				
<b>Foundation Works (RWD1)</b>		173	20-Jul-19	17-Feb-20				
CON30190	Pre-drill & construct socket H-pile works at RWD1 (144nos, 6d/no, 5 teams)	173	20-Jul-19	17-Feb-20				
CON30200	Pre-drill & construct bored pile (CH94-CH130, 5nos, 16d/no, team 1)	80	17-Aug-19	21-Nov-19				
<b>Works in Slope D2</b>		169	02-Mar-19 A	19-Oct-19				
<b>Construction of Retaining Wall RWD2</b>		169	02-Mar-19 A	19-Oct-19				
CON300210	Site clearance works (slope D2)	60	02-Mar-19 A	24-Apr-19 A				
CON30022	Install monitoring & instrumentation (Slope D2)	60	21-May-19	31-Jul-19				
CON30080	Install sheet pile, support & slope works at slope D2 (L=75m)	90	04-Jul-19	19-Oct-19				
<b>Works in Slope D3</b>		437	11-Dec-18 A	16-Jun-20				
<b>Slope Works (Slope D3)</b>		437	11-Dec-18 A	16-Jun-20				
CON300120	Relocation of existing HyD lighting (by CLPE's contractor) (RIW3)	135	11-Dec-18 A	26-Jun-19				
CON30028	Trees felling (Slope D3, CH0 to CH115)	60	29-Mar-19 A	17-May-19 A				
CON30030	Install safety fencing, from haul road & hoarding (CH0 to CH115)	18	30-Mar-19 A	06-May-19 A				
CON30029	Install monitoring & instrumentation (Slope D3)	60	07-May-19 A	18-Jul-19				
CON300310	Awaiting DC member / Stakeholder site inspection	18	07-May-19 A	22-May-19				
CON30120	Cut slope works (CH0 to CH115) (L=115m, 14000m3, 44m3/d)	318	23-May-19	16-Jun-20				
<b>Pedestrian Connectivity Facility (PC-E8)</b>		356	22-Mar-19 A	06-Jun-20				
<b>Construction Works</b>		356	22-Mar-19 A	06-Jun-20				
<b>Preparation Works</b>		347	01-Apr-19 A	06-Jun-20				
<b>Trees Works</b>		347	01-Apr-19 A	06-Jun-20				
CON400810	Trees preservation duration works period at portion G	347	01-Apr-19 A	06-Jun-20				
<b>Hoarding Works &amp; Site Set-up</b>		119	11-Apr-19 A	21-Sep-19				
CON400720	Erect hoarding & safety fencing (at football pitch)	17	11-Apr-19 A	31-May-19				
CON40150	Form haul road (from Hiu Yuk Path site access to PC E8-F4)	60	06-May-19 A	17-Jul-19				
CON40090	Erect temporary staircase along E8-ABT & diversion	30	17-Aug-19	21-Sep-19				
<b>Earth Works</b>		174	22-Mar-19 A	23-Oct-19				
CON40040	Install monitoring & instrumentation (PC-E8)	24	22-Mar-19 A	29-Apr-19 A				
CON40130	ELS to E8-F9 & E8-F1 (approx 565m3, @80m3/d + 2wk for ELS)	19	28-Mar-19 A	11-May-19 A				
CON40180	ELS to E8-F2 (approx 225m3, @80m3/d + 2wk for ELS)	15	14-May-19 A	03-Jun-19				
CON40190	ELS to E8-F3 (approx 200m3, @80m3/d + 2wk for ELS)	15	04-Jun-19	21-Jun-19				

- Actual Work
- Remaining Work
- Milestone

Activity ID	Activity Name	Duration	Start	Finish	2019			
					May 17	Jun 18	Jul 19	Aug 20
CON40140	Construct soldier pile wall to E8-ABT	52	17-Jun-19	16-Aug-19				
CON40170	ELS to E8-F4 (approx 1783m3, @25m3/d)	72	18-Jul-19	12-Oct-19				
CON40200	ELS to E8-F7 (approx 1378m3, @25m3/d)	55	17-Aug-19	23-Oct-19				
<b>Footing Construction</b>		<b>57</b>	<b>14-May-19 A</b>	<b>20-Jul-19</b>				
CON40210	Construct footing E8-F9 & E8-F1 (85m3) & backfilling	30	14-May-19 A	19-Jun-19				
CON40220	Construct footing E8-F2 (38m3) & backfilling	18	04-Jun-19	25-Jun-19				
CON40230	Construct footing E8-F3 (65m3) & backfilling	24	22-Jun-19	20-Jul-19				
<b>Pier Construction</b>		<b>93</b>	<b>26-Jun-19</b>	<b>16-Oct-19</b>				
CON40240	Construct pier E8-P1 (2 pour)	42	26-Jun-19	14-Aug-19				
CON40250	Construct pier E8-P2 (3 pour)	72	22-Jul-19	16-Oct-19				
<b>Escalator Pit Construction</b>		<b>60</b>	<b>15-Aug-19</b>	<b>26-Oct-19</b>				
CON40260	Construct escalator pit F1>P1	60	15-Aug-19	26-Oct-19				
<b>E&amp;M Works</b>		<b>156</b>	<b>25-Mar-19 A</b>	<b>03-Oct-19</b>				
CON41250	Application for power supply & energization (PC-E8)	156	25-Mar-19 A	03-Oct-19				
<b>Pedestrian Connectivity Facility (PC-E11)</b>		<b>864</b>	<b>15-Nov-18 A</b>	<b>27-Nov-21</b>				
<b>Construction Works</b>		<b>864</b>	<b>15-Nov-18 A</b>	<b>27-Nov-21</b>				
<b>Preliminary Works</b>		<b>856</b>	<b>08-Jan-19 A</b>	<b>27-Nov-21</b>				
CON40731	Trees preservation duration works period at portion E	856	08-Jan-19 A	27-Nov-21				
<b>Foundation Works</b>		<b>317</b>	<b>15-Nov-18 A</b>	<b>08-Jan-20</b>				
CON40750	Pre-drill & construct socket H-pile works for E11-PC1 to E11-PC5 (89nos, 6d/n)	317	15-Nov-18 A	08-Jan-20				
CON40770	Tree felling & pre-drill works in Portion FI	30	17-May-19 A	21-Jun-19				
<b>Sub-structure Works</b>		<b>90</b>	<b>03-Aug-19</b>	<b>19-Nov-19</b>				
CON40790	ELS & construct sub-structure for E11-PC1	90	03-Aug-19	19-Nov-19				
<b>Bus-Bus Interchange Public Toilet</b>		<b>278</b>	<b>29-Dec-18 A</b>	<b>05-Dec-19</b>				
CON40740	Construct Public Toilet	188	29-Dec-18 A	19-Aug-19				
CON41270	Application for power supply & energization (BBI Toilet)	90	29-Jan-19 A	03-Jun-19				
CON40810	E&M Installation and Associated Landscape Works	90	20-Aug-19	05-Dec-19				
CON408110	ABWF Works (BBI Toilet)	84	20-Aug-19	28-Nov-19				
<b>Pedestrian Connectivity Facility System A (SYA)</b>		<b>231</b>	<b>24-Jan-19 A</b>	<b>05-Nov-19</b>				
<b>Construction Works</b>		<b>231</b>	<b>24-Jan-19 A</b>	<b>05-Nov-19</b>				
<b>Sub-structure Works</b>		<b>231</b>	<b>24-Jan-19 A</b>	<b>05-Nov-19</b>				
CON500420	Excavate & install support at SYA-F1 (+144 to +130.5mPD, 2321m3, 40m3/d +	93	24-Jan-19 A	22-May-19				
CON500430	Addition duration due to quality poor than prelim estimate & addition slope stat	36	23-May-19	05-Jul-19				
CON500510	Construct footing SYA-F1 (+130.5 ~ +134mPD)	42	06-Jul-19	23-Aug-19				
CON500520	Construct footing SYA-F1 (+134 ~ +144mPD)	66	17-Aug-19	05-Nov-19				
<b>Pedestrian Connectivity Facility System B (SYB)</b>		<b>221</b>	<b>11-Mar-19 A</b>	<b>03-Jan-20</b>				
<b>Construction Works</b>		<b>221</b>	<b>11-Mar-19 A</b>	<b>03-Jan-20</b>				
<b>Preliminary Works</b>		<b>155</b>	<b>11-Mar-19 A</b>	<b>28-Oct-19</b>				
CON502010	Relocation of existing utilities (by C1 Contractor)	45	11-Mar-19 A	07-May-19 A				
CON502030	Waiting an approval for construct run-in-out along existing roundabout at On S	37	11-Mar-19 A	26-Apr-19 A				
CON502040	LCSD confirm remove existing vegetation along existing footpath at On Sau R	37	11-Mar-19 A	26-Apr-19 A				
CON502050	Construct run-in-out along existing roundabout	12	25-Apr-19 A	30-Apr-19 A				
CON50188	Install monitoring & instrumentation (PC-SYB)	12	14-May-19 A	27-May-19				
CON50220	Form haul road (at upper portion: PC-A1 to PC8)	54	20-May-19 A	26-Jul-19				
CON502020	Relocation of existing hoarding (by C1 Contractor)	12	21-May-19	03-Jun-19				
CON50210	Form haul road (till to near PC7)	77	27-Jul-19	28-Oct-19				
<b>Foundation Works</b>		<b>205</b>	<b>26-Mar-19 A</b>	<b>03-Jan-20</b>				
CON50270	Pre-drill & construct socket H-pile works at SYB-PC3 (63nos, 6d/no, 2 teams)	189	26-Mar-19 A	25-Nov-19				
CON50260	Mobilisation of socketted H pile works to SYB-PC3	12	14-May-19 A	31-May-19				
CON50320	Mobilisation of socketted H pile plant to SYS-A1	12	27-Jul-19	09-Aug-19				
CON50350	Mobilisation of socketted H pile plant to SYS-PC8	12	27-Jul-19	09-Aug-19				
CON50330	Pre-drill & construct socket H-pile works at SYB-A1 under Portion K (18nos, 6c	108	10-Aug-19	17-Dec-19				
CON50360	Pre-drill & construct socket H-pile works at SYB-PC8 (20nos, 6d/no, 1 team)	120	10-Aug-19	03-Jan-20				
<b>Earth Works</b>		<b>44</b>	<b>02-Aug-19</b>	<b>23-Sep-19</b>				
CON50510	Install sheet pile at SYB-PC4 (27m L, 3m/d, 1 team)	12	02-Aug-19	15-Aug-19				
CON50520	Excavate & install support at SYB-PC4 (270m3, 20m3/d, 1 team + 18d)	32	16-Aug-19	23-Sep-19				

- Actual Work
- Remaining Work
- Milestone